




ENGINEERING DRAWING

REVISIONS

SYM	ECN NO.	DESCRIPTION	DATE	APPROVED
AX1			11/02/2001	AMY

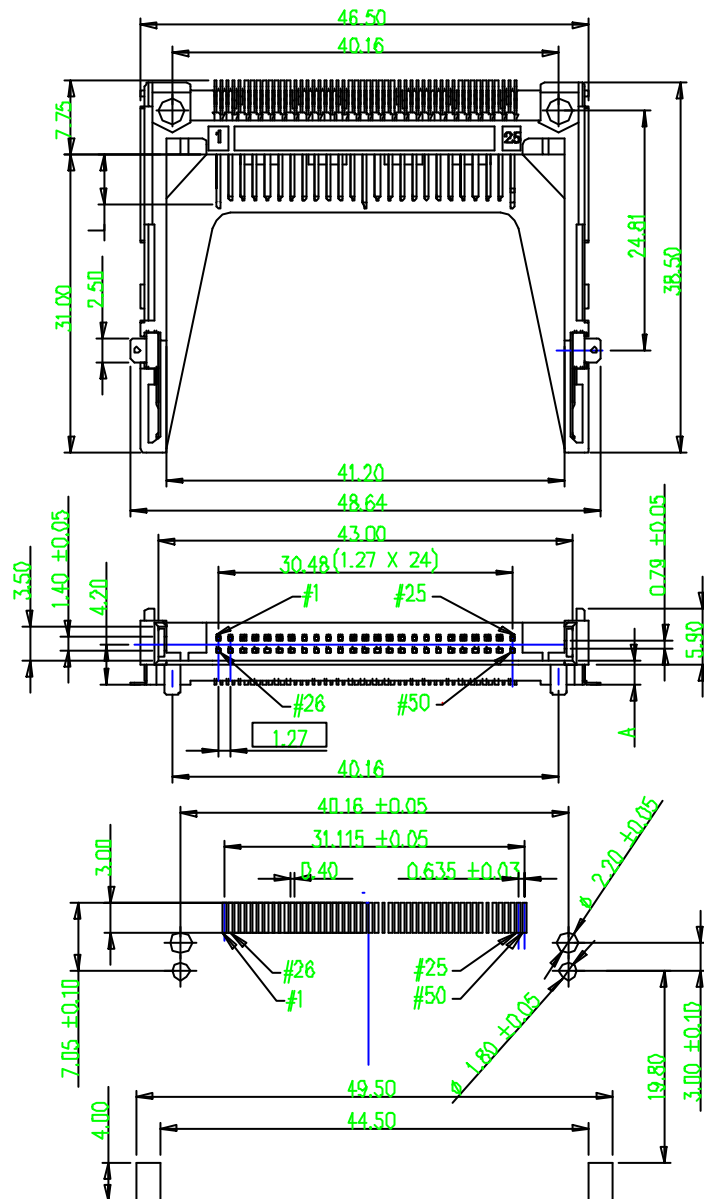

Recommended PCB Pattern

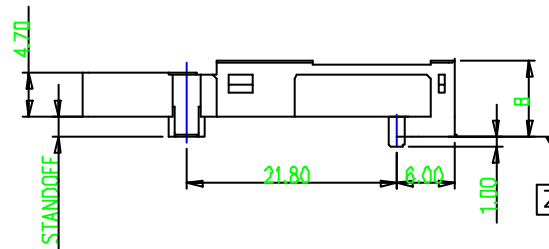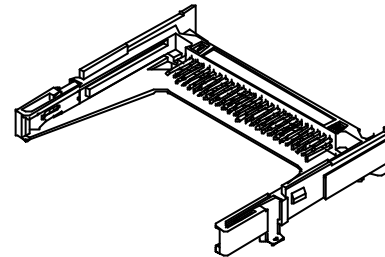


NOTES :

- MATERIAL :**
INSULATOR : HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING: UL94V-0
COLOR : IVORY
CONTACT : COPPER ALLOY
GROUND MOUNT EAR: COPPER ALLOY
- PLATING :**
CONTACT AREA: 100g" GOLD
UNDER PLATING: NICKEL OVERALL
SOLDERTAIL AREA: TIN/LEAD
GROUND MOUNT EAR AREA: TIN/LEAD
- SOLDERTAILS TO BE WITHIN 0.05 UPWARD AND 0.2 DOWNWARD FROM Z-DATUM PLACE, AND COPLANARITY OF SOLDERTAILS TO BE WITHIN 0.12**

PIN NUMBER	DIM. L±0.10
25,26	3.50
ALL OTHER PINS	4.25
1, 13, 38, 50	5.00

PART NO.	STAND-OFF	DIM. A	DIM. B
TCH050-2100	1.65	2.10	7.55
TCH050-2200	2.00	2.45	7.90

TOLERANCE					DR		TC&C ELECTRONIC CO.,LTD.	
SELECT					AMY			
IN.	TOL	1	2	3	CHKD		TITLE	
0.000 +/-		0.05	0.1	0.15	APPD			
0.00 +/-		0.1	0.15	0.25	UNIT		CF CARD TYPE II CONNECTOR STAND-OFF	
0.0 +/-		0.15	0.3	0.5				
Ø.	+/-	0.25	0.5	1.0	SCALE		PART NO.	
ANGLE +/-					MM			
					SHEET		DRAWING NO.	
					1/1		TC050272X00	
					REV		TCH050-2X00	
					AX1		TC050272X00	