


MARK	DATE	REVISION	REVISER	APP. BY
①				
②				
③				

MODEL NO			QNE			
MATERIAL			HOUSING-AL			
			LENS-TEMPERED GLASS			
			PROTECTION CAGE-SUS316L			
COLOR OF LENS			RED(), AMBER(), GREEN(), BLUE()			
FLASHING PER MIN.			FLASHING - 60~80			
			LED STROBE - 70~80			
			LED ROTATE - 60~80			
USE VOLT.	LED	CURRENT	DC12~24V		MAX. 0.558A	
			AC110~230V		MAX. 0.136A	
0.2W						
PROTECTION GRADE			WATER & DUST PROOF IP66			
CABLE ENTRY			1/2" NPT			
COLOR OF HOUSING			RED			
ACTION			LED STEADY / FLASHING / STROBE / ROTATE			

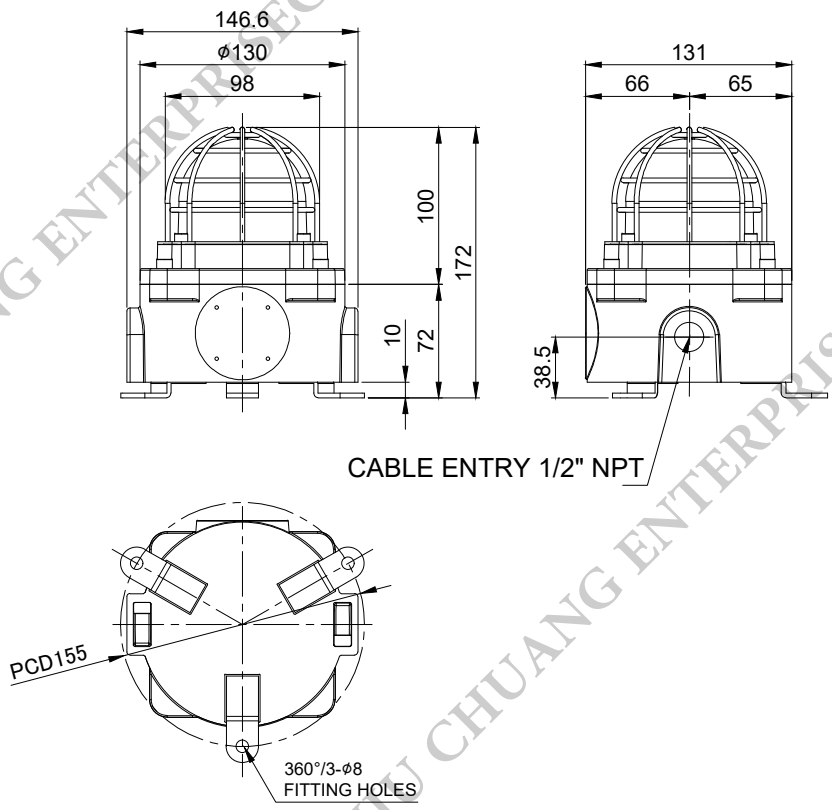

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH					
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	1
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW
	3~6			±0.3	±0.5		Y.H.JOO			J.K.HAN	3
	6~30	±0.1	±0.2	±0.5	±1						DATE
	30~120	±0.15	±0.3	±0.8	±1.5						2019.03.20
	120~400	±0.2	±0.5	±1.2	±2.5						
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4		TITLE QNE OUTLINE DRAWING			MODEL QNE	
	0~10	±1°		±1°30'	±3°					DWG. NO. QNE_OUT	
	10~50	±0°30'		±1°	±2°					SCALE N/S	
	50~120	±0°20'		±0°30'	±1°					SIZE A4	REV 00
	120~400	±0°10'		±0°13'	±0°30'					SHEET 1/1	