






KS9-3206




KS9-3207



KS9-3208



KS9-3209




型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS9-3206	鐵製品、霧面導光板	100~240	9	840 / 910 / 910	3000 / 4000 / 5700	≥ 80	140°	OSRAM 或同等品
KS9-3207	鐵製品、霧面導光板	100~240	12	1080 / 1170 / 1170	3000 / 4000 / 5700	≥ 80	140°	OSRAM 或同等品
KS9-3208	鐵製品、霧面導光板	100~240	15	1140 / 1200 / 1200	3000 / 4000 / 6000	≥ 80	140°	SMD
KS9-3209	鐵製品、霧面導光板	100~240	20	2000 / 2200 / 2200	3000 / 4000 / 5700	≥ 80	140°	OSRAM 或同等品

DOWN LIGHT

Lore velit prat, vel illum zzril er irillamet, conse molore magniamcommy nullutat aute vulput adipsumsan utatuer stisim nit, commolore magnim vel dolobore minciNem acepudae essuntiorrum rehendingenis sit ulparionsed utem hil invel int faccum quis aut quo optam estem voluptatem sus, nus.



KD-084B



- 感應距離：5 米
- 亮燈時間：45 秒

型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	光源規格 Light source
KD-084B	鋁、霧面燈罩	100~240	15	1440 / 1560 / 1560	3000 / 4000 / 5700	OSRAM SMD 或同等品




型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS3-1211	鋁製品	100~240	12	1080 / 1170 / 1170	3000 / 4000 / 5700	≥ 80	140°	OSRAM 或同等品
KS3-1212	鋁製品	100~240	12	1080 / 1170 / 1170	3000 / 4000 / 5700	≥ 80	140°	OSRAM 或同等品

DOWN LIGHT


LED 嵌入型燈具



MKS3-0424




KD-084P




型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
MKS3-0424	鋁製品、霧面導光板	100~240	15	1000 / 1100 / 1100	3000 / 4000 / 6000	≥ 80	140°	SMD
KD-084P	耐熱塑膠、霧面玻璃	100~240	15	1000 / 1100 / 1100	3000 / 4000 / 6000	≥ 80	140°	SMD




KS6-3408



KS6-3409



KS6-3411



型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS6-3408	鋁製品、霧面導光板	100~240	7	500 / 550 / 550	3000 / 4000 / 5700	≥ 80	140°	OSRAM 或同等品
KS6-3409	鋁製品、霧面導光板	100~240	9	840 / 910 / 910	3000 / 4000 / 5700	≥ 80	140°	OSRAM 或同等品
KS6-3411	鋁製品、霧面導光板	100~240	12	1080 / 1170 / 1170	3000 / 4000 / 5700	≥ 80	140°	OSRAM 或同等品


DOWN LIGHT




型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS4-5008	鋁製品、霧面玻璃	100~240	9	840 / 910 / 910	3000 / 4000 / 5700	≥ 80	140°	OSRAM 或同等品
KS4-5007	鋁製品、霧面玻璃	100~240	12	1080 / 1170 / 1170	3000 / 4000 / 5700	≥ 80	140°	OSRAM 或同等品
KD-084ET	鋁製品、霧面玻璃	100~240	15	1440 / 1560 / 1560	3000 / 4000 / 5700	≥ 80	140°	OSRAM 或同等品




KS9-3416



KS4-5006



KS4-5005




型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS9-3416	鋁製品、霧面導光板	100~240	20	2000 / 2200 / 2200	3000 / 4000 / 5000	≥ 80	140°	CREE 或同等品
KS4-5006	鋁製品、霧面玻璃	100~240	15	1440 / 1560 / 1560	3000 / 4000 / 5700	≥ 80	140°	OSRAM 或同等品
			20	2000 / 2200 / 2200	3000 / 4000 / 5000	≥ 80	140°	CREE 或同等品
KS4-5005	鋁製品、霧面玻璃	100~240	20	2000 / 2200 / 2200	3000 / 4000 / 5000	≥ 80	140°	CREE 或同等品
			30	3000 / 3300 / 3300	3000 / 4000 / 5000	≥ 80	140°	CREE 或同等品


LED 大尺寸嵌入式燈具



KS5-3401



KS5-3402



型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS5-3401	鋁製品、霧面導光板	100~240	20	2000 / 2200 / 2200	3000 / 4000 / 5000	≥ 80	140°	CREE 或同等品
KS5-3402	鋁製品、霧面導光板	100~240	20	2000 / 2200 / 2200	3000 / 4000 / 5000	≥ 80	140°	CREE 或同等品
			30	3000 / 3300 / 3300	3000 / 4000 / 5000	≥ 80	140°	CREE 或同等品




型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS9-3424	壓鑄鋁、霧面導光板	100~240	20	2000 / 2200 / 2200	3000 / 4000 / 5700	≥ 80	偏光 45°	OSRAM 或同等品


LED 嵌入型燈具




KS5-3105




KS3-0374



KS5-3106




KS5-3107




型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS5-3105	鋁製品、霧面玻璃	100~240	12	1200 / 1320 / 1320	3000 / 4000 / 5000	≥ 80	140°	CREE COB 或同等品
KS3-0374	鋁製品、十字格柵	100~240	12	1200 / 1320 / 1320	3000 / 4000 / 5000	≥ 80	24°	CREE COB 或同等品
KS5-3106	鋁製品、光學反光罩	100~240	12	1200 / 1320 / 1320	3000 / 4000 / 5000	≥ 80	24°	CREE COB 或同等品
KS5-3107	鋁製品、光學反光罩	100~240	12	1200 / 1320 / 1320	3000 / 4000 / 5000	≥ 80	24°	CREE COB 或同等品




KS3-0375




KS3-0376



KS5-3108



KS5-3109




型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS3-0375	鋁製品、光學反光罩	100~240	12	1200 / 1320 / 1320	3000 / 4000 / 5000	≥ 80	24°	CREE COB 或同等品
KS3-0376	鋁製品、光學反光罩	100~240	12	1200 / 1320 / 1320	3000 / 4000 / 5000	≥ 80	24°	CREE COB 或同等品
KS5-3108	鋁製品、光學反光罩	100~240	12	1200 / 1320 / 1320	3000 / 4000 / 5000	≥ 80	24°	CREE COB 或同等品
KS5-3109	鋁製品、光學反光罩	100~240	12	1200 / 1320 / 1320	3000 / 4000 / 5000	≥ 80	24°	CREE COB 或同等品


LED 高亮度防眩嵌燈



KS9-3439



KS9-3441

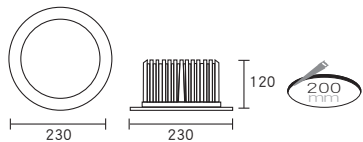


- 1. 採用 CREE COB 晶片或同等級品，光線均勻無疊影
- 2. 大功率設計，適合 3 米以上高度安裝
- 3. 壓鑄鋁材質，散熱系數佳


型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS9-3439	壓鑄鋁、反光杯	100~240	30	3000 / 3300 / 3300	3000 / 4000 / 5000	≥ 80	24°	CREE 或同等品
KS9-3441	壓鑄鋁、反光杯	100~240	60	5000 / 5500 / 5500	3000 / 4000 / 5000	≥ 80	24°	CREE 或同等品




KS5-3303



KS5-3404



KS5-3405



型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS5-3303	鋁製品、光學反光罩、光學透鏡	100~240	21	2100 / 2200 / 2200	3000 / 4000 / 5700	≥ 80	40°	CREE 或同等品
KS5-3404	鋁製品、光學反光罩、光學透鏡	100~240	30	3000 / 3300 / 3300	3000 / 4000 / 5700	≥ 80	40°	CREE 或同等品
KS5-3405	鋁製品、光學反光罩、光學透鏡	100~240	40	3800 / 4150 / 4150	3000 / 4000 / 5700	≥ 80	40°	CREE 或同等品


LED 可調焦距嵌入型燈具




型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS6-3419	鋁製品、可調焦式透鏡	100~240	12	1200 / 1320 / 1320	3000 / 4000 / 5000	≥ 80	15~60°	CREE 或同等品
KS6-3418	鋁製品、可調焦式透鏡	100~240	30	3000 / 3300 / 3300	3000 / 4000 / 5000	≥ 80	15~60°	CREE 或同等品



KS9-3433 白色



KS9-3435 白色

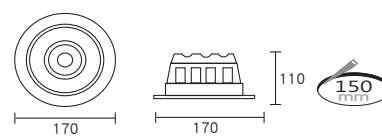

1. 可調角度，防眩光設計，保護視力
2. 採用 CREE COB 晶片或同等級品，光線均勻無疊影
3. 壓鑄鋁燈體，散熱佳

型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS9-3433	壓鑄鋁、光學透鏡	100~240	12	1200 / 1320 / 1320	3000 / 4000 / 5000	≥ 80	24°	CREE 或同等品
KS9-3435	壓鑄鋁、光學透鏡	100~240	20	2000 / 2200 / 2200	3000 / 4000 / 5000	≥ 80	24°	CREE 或同等品