

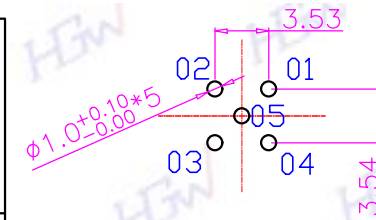


TABLE A


HGM2-M1202P-14	HGM2-M1203P-24	HGM2-M1203P-49-11	HGM2-M1204P-66	HGM2-M1205P-58

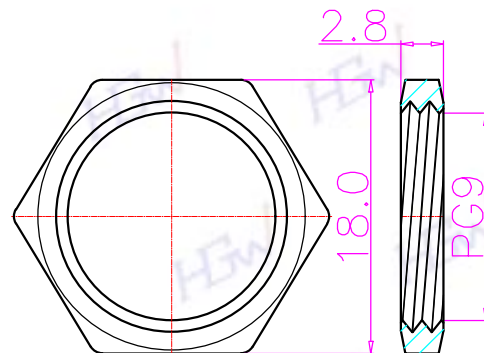

RECOMMEND
P.C.B LAYOUT

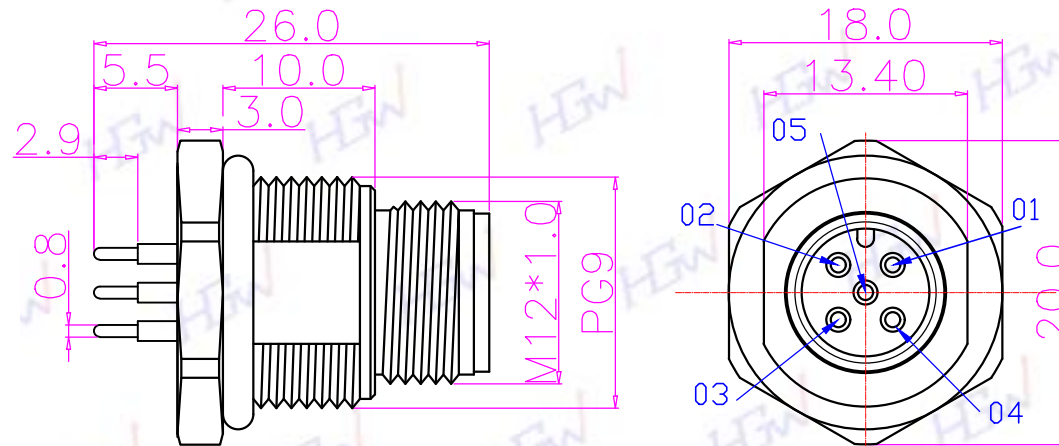

NUT



RECOMMEND PANEL
CUT - OUT

1.MATERIAL

- 1-1.HOUSING: PBT UL94V-0 ; COLOR: BLACK
- 1-2.CONTACT: BRASS
- 1-3.NUT: BRASS
- 1-4.SHELL: BRASS
- 1-5.O-RING: EPDM ; COLOR: BLACK

2.FINISH

- 2-1.CONTACT: 10 MICRO INCHES MIN. GOLD PLATED
- UNDER PLATE: NICKEL
- 2-2.NUT: NICKEL PLATED
- 2-3.SHELL: NICKEL PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 4A
- 3-2.RATED VOLTAGE: 250V ; 5P: 60V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~85°C



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		170805

客戶簽名確認章

TITLE

M12(M)前所PG9板端插板式

P/N: SEE TABLE A

DWG. NO: QC5580

DR. Dan UNIT: mm

CH. Jason SCALE 1:1

AP. Lanny
UNLESS OTHERWISE SPECIFIED TOLERANCES:
X ± 0.20 XXX ± 0.05
XX ± 0.10 ANGLE $\pm 1^\circ$

REV. A SHEET 1/1