
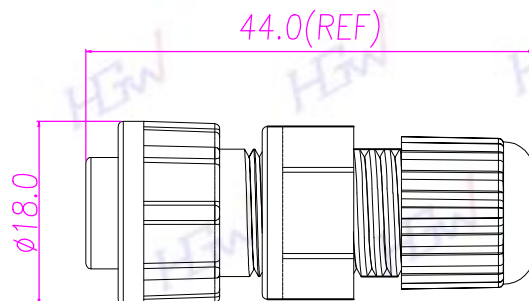


TABLE A

HGF2-BS02P-55-11	HGF2-BS03P-97-11	HGF2-BS04P-195-11	HGF2-BS05P-151-11
HGF2-BS06P-63-11	HGF2-BS07P-11-11	HGF2-BS08P-102-11	HGF2-BS08P-106-11

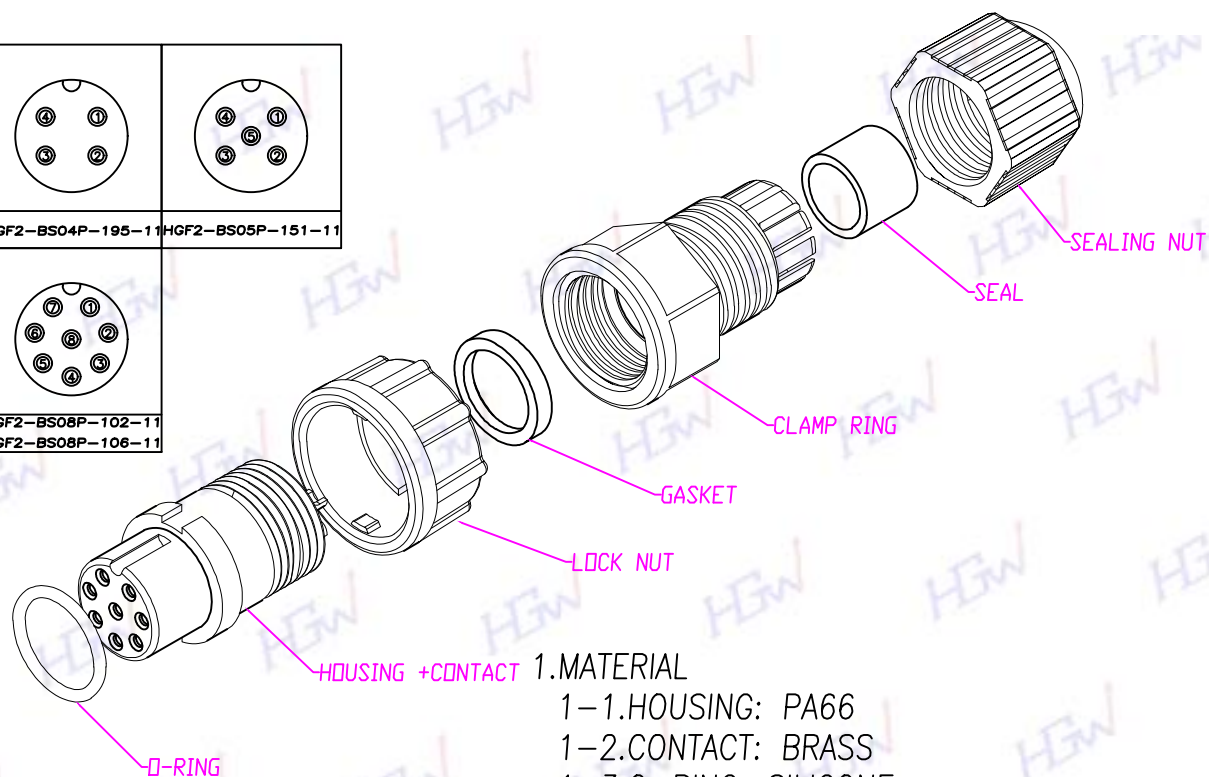

1.MATERIAL

- 1-1.HOUSING: PA66
 1-2.CONTACT: BRASS
 1-3.O-RING: SILICONE
 1-4.LOCK NUT: PA66
 1-5.GASKET: SILICONE
 1-6.CLAMP RING: PA66
 1-7.SEAL: SILICONE
 CABLE ODØ4.5mm~6.5mm

2.FINISH

- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 5A
 3-2.RATED VOLTAGE: 250V
 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C



禾剛企業有限公司
 HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		180727

Drawing confirmation signature

TITLE B SIZE(F)LOCK TYPE
 ASSEMBLY 5A

P/N:

DWG. NO: QC8635

DR. Dan UNIT: mm

CH. Jason SCALE 1:1

AP. Lanny
 REV. A SHEET 1/1
 UNLESS OTHERWISE SPECIFIED TOLERANCES:
 X ± 0.1 XXX ± 0.03
 XX ± 0.05 ANGLE ± 1°