





禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		170506


客戶圖面確認簽回章

TITLE M5(M)前鎖插板式		
P/N: SEE TABLE A		
DWG. NO: QC4675		
DR. Dan		UNIT: mm
CH. Jason	SCALE	1:1
AP. Lanny	UNLESS OTHERWISE SPECIFIED TOLERANCES:	
REV. A	SHEET 1/1	X ± 0.20 XXX ± 0.05 XX ± 0.10 ANGLE $\pm 1^\circ$

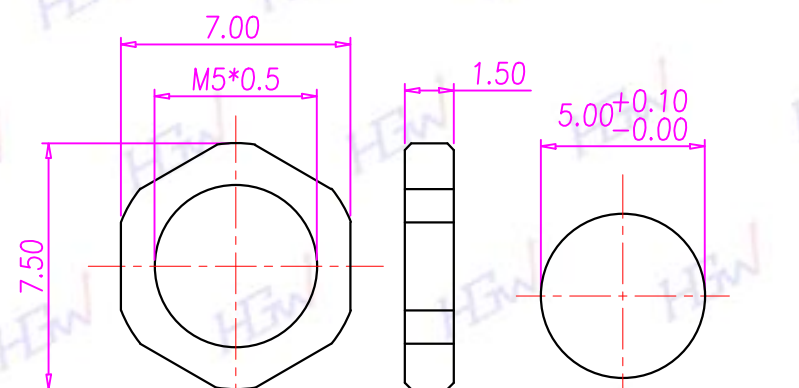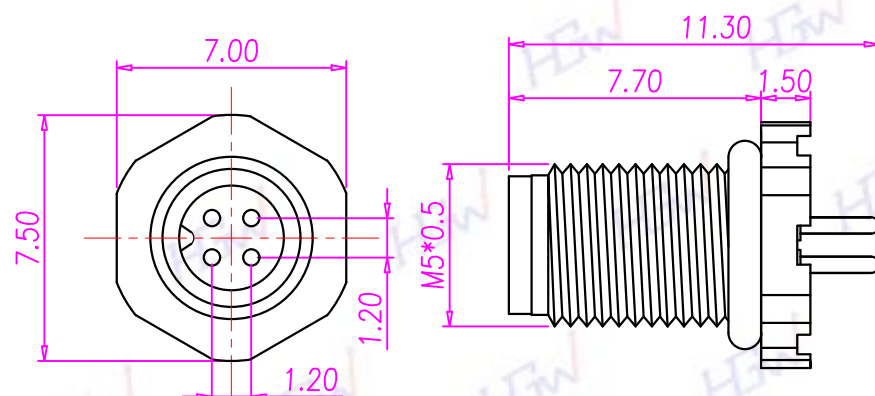

NUT

RECOMMEND PANEL CUT-OUT




RECOMMEND PANEL PCB

TABLE A

HGM2-M504P-117-11	GOLD 10u"
HGM2-M503P-60-11	GOLD 10u"
HGM2-M502P-41-11	GOLD 10u"
HGM2-M504P-41	GOLD FLASH
HGM2-M503P-36-11	GOLD FLASH
HGM2-M502P-26-11	GOLD FLASH
PART NO	FINISH

TABLE A

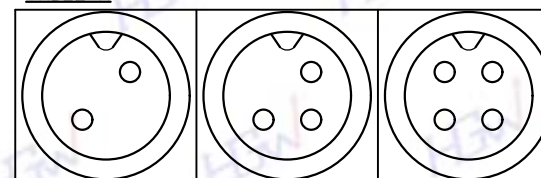

1. MATERIAL

- 1-1. HOUSING: PBT UL94V-0 ; COLOR: BLACK
- 1-2. CONTACT: BRASS
- 1-3. NUT: BRASS
- 1-4. SHELL: BRASS
- 1-5. O-RING: NBR ; COLOR: BLACK

2. FINISH

- 2-1. CONTACT: SEE TABLE A
- 2-2. NUT: NICKEL PLATED
- 2-3. SHELL: NICKEL PLATED

3. ELECTRICAL SPECIFICATION

- 3-1. RATED CURRENT: 1A
- 3-2. RATED VOLTAGE: 60V
- 3-3. WATERPROOF: IP67

4. ENVIRONMENTAL

- 4-1. OPERATION TEMPERATURE: -20°C~85°C