


TABLE A

HGM2-M1203P-43-11	HGM2-M1202P-31-11

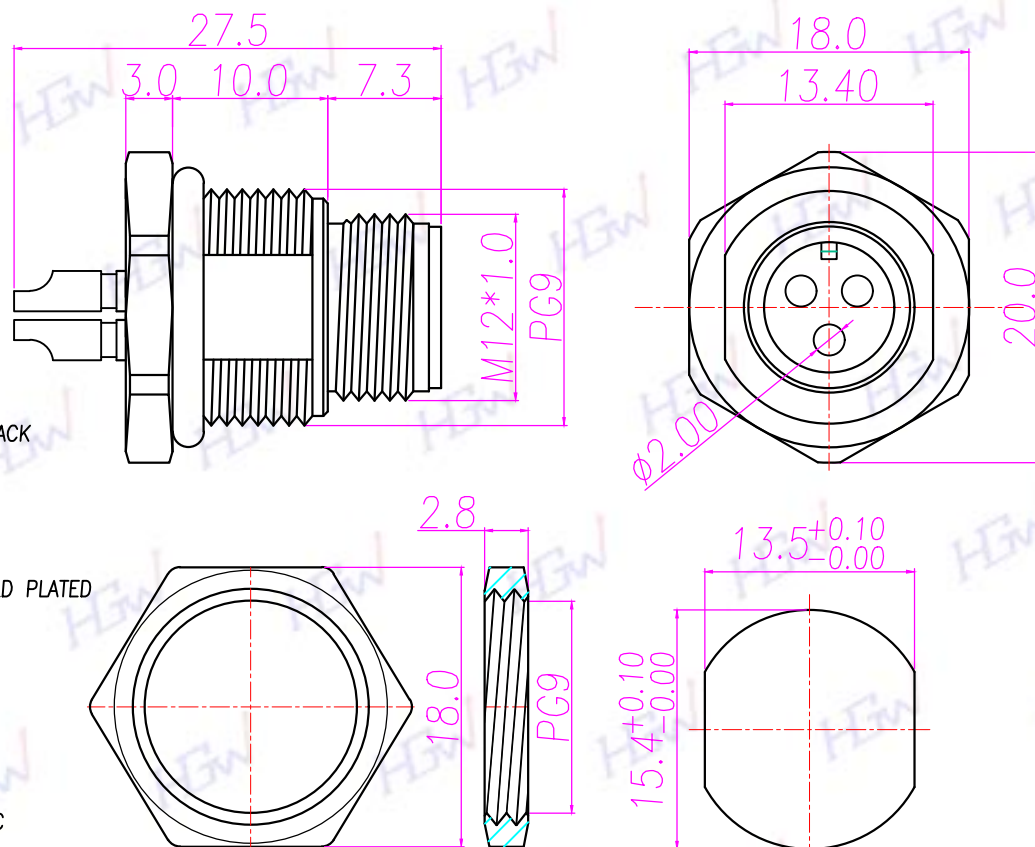

1.MATERIAL

- 1-1.HOUSING: PBT UL94V-0 ; COLOR: BLACK
 1-2.CONTACT: BRASS
 1-3.NUT: BRASS
 1-4.SHELL: BRASS
 1-5.O-RING: EPDM ; COLOR: BLACK

2.FINISH

- 2-1.CONTACT: 10 MICRO INCHES MIN. GOLD PLATED
 UNDER PLATE: NICKEL
 2-2.NUT: NICKEL PLATED
 2-3.SHELL: NICKEL PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 15A
 3-2.RATED VOLTAGE: 250V
 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~85°C



禾剛企業有限公司
 HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		200316

客戶圖面確認簽回章

TITLE
 M12(M)15A前鎖板端焊式

P/N: SEE TABLE A

DWG. NO: QC6905

DR. Dan UNIT: mm

CH. Jason SCALE 1:1

AP. Lanny UNLESS OTHERWISE SPECIFIED TOLERANCES:

REV. A	SHEET 1/1	XX ± 0.1	XXX ± 0.03
		XX ± 0.05	ANGLE ± 1°