



TABLE A

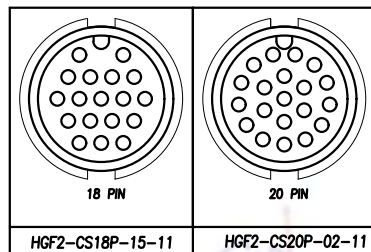

Pin Assignments(Front View)

TABLE A

P/N	CABLE OD	
	ø8.6mm~ø9.6mm	ø6.5mm~ø7.6mm
HGF2-CS18P-15-11	V	V
HGF2-CS20P-02-11	V	

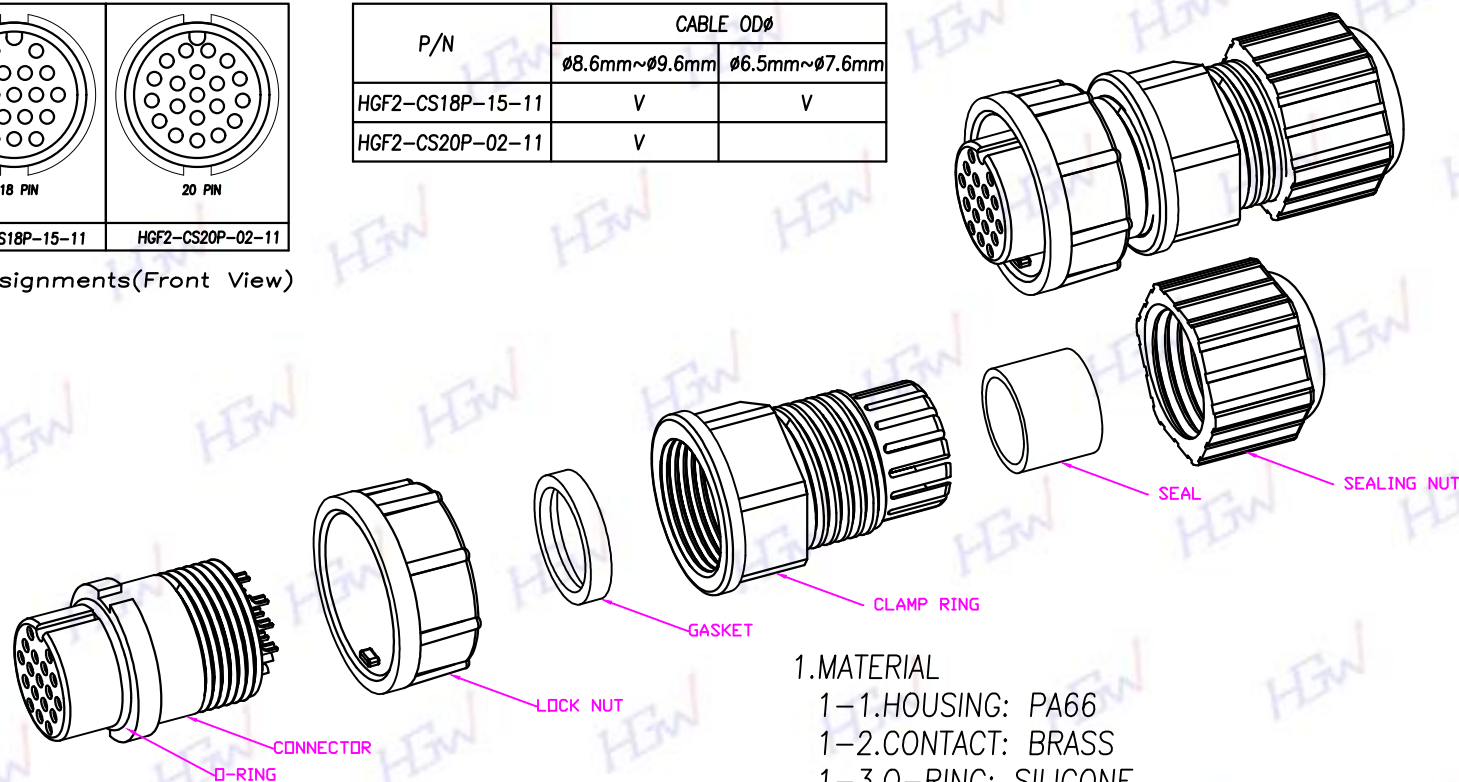

1.MATERIAL

- 1-1.HOUSING: PA66
- 1-2.CONTACT: BRASS
- 1-3.O-RING: SILICONE
- 1-4.LOCK NUT: PA66
- 1-5.GASKET: SILICONE
- 1-6.CLAMP RING: PA66
- 1-7.SEAL: SILICONE
- 1-8.SEALING NUT: PA66

2.FINISH


- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 2A
- 3-2.RATED VOLTAGE: 250V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C

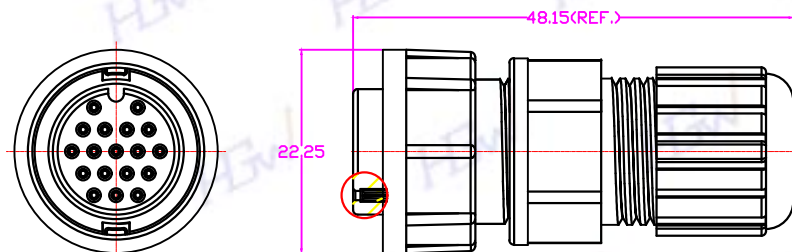

禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		190102

客 戶 簽 名 確 認 章

TITLE
C SIZE(F)半牙組裝式

P/N: SEE TABLE A

DWG. NO: QC8590

DR. Dan  UNIT: mm

CH. Jason SCALE 1:1

AP. Lanny
UNLESS OTHERWISE SPECIFIED TOLERANCES:
X ± 0.20 XXX ± 0.05
REV. A SHEET 1/1 XX ± 0.10 ANGLE ± 1°