



HGF3-M806P-02-11	GOLD FLASH	HGF3-M806P-03-11	GOLD 10u"
HGF3-M805P-07-11	GOLD FLASH	HGF3-M805P-09-11	GOLD 10u"
PART No.	FINISH	PART No.	FINISH



TABLE A

	
6PIN	5PIN
HGF3-M806P-02-11	HGF3-M805P-07-11
HGF3-M806P-03-11	HGF3-M805P-09-11



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		190301

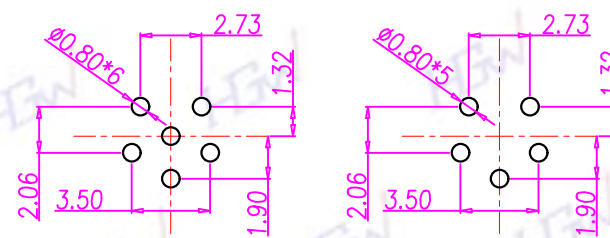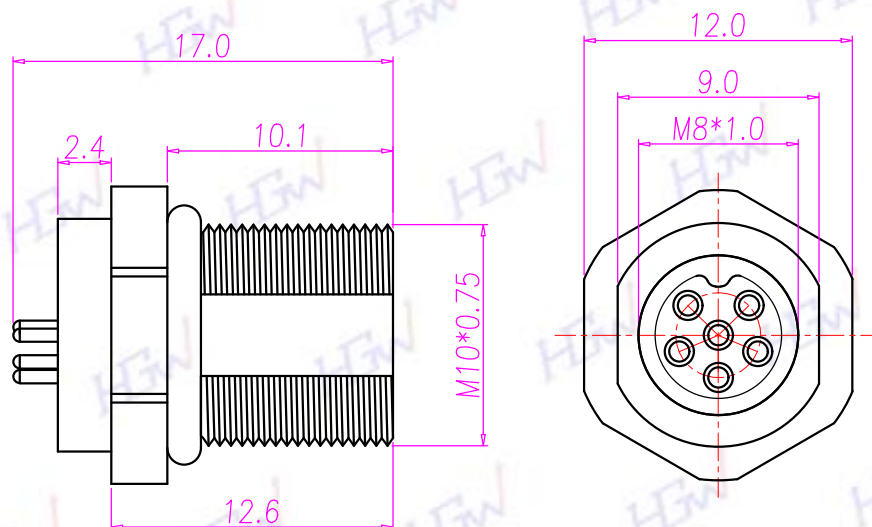

RECOMMEND P.C.B LAYOUT

1.MATERIAL

- 1-1.HOUSING: PA66 UL94V-0 ; COLOR: BLACK
- 1-2.CONTACT: BRASS
- 1-3.SHELL: BRASS
- 1-4.NUT: BRASS
- 1-5.O-RING: EPDM ; COLOR: BLACK

2.FINISH


- 2-1.CONTACT: SEE TABLE A
- 2-2.SHELL: NICKEL PLATED
- 2-3.NUT: NICKEL PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 1.5A
- 3-2.RATED VOLTAGE: 30V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C

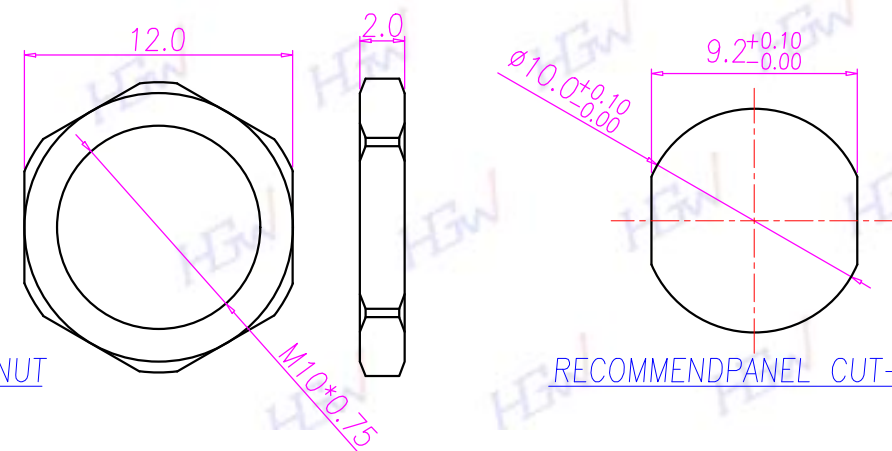

RECOMMEND PANEL CUT-OUT

客戶圖面確認簽回章

TITLE

M8(F)前鎖板端插板式(梅花型)

P/N: SEE TABLE A

DWG. NO: QC9407

DR. Dan  UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny
UNLESS OTHERWISE SPECIFIED TOLERANCES:
REV. A SHEET 1/1
X ± 0.20 XXX ± 0.05
XX ± 0.10 ANGLE $\pm 1^\circ$