




HGM04-M802P-CB



HGM04-M803P-CB




HGM04-M804P-CB




HGM02-M805'P-CB




HGM02-M806'P-CB





HGM02-M805P-CB




HGM02-M806P-CB



HGM01.5-M808P-CB

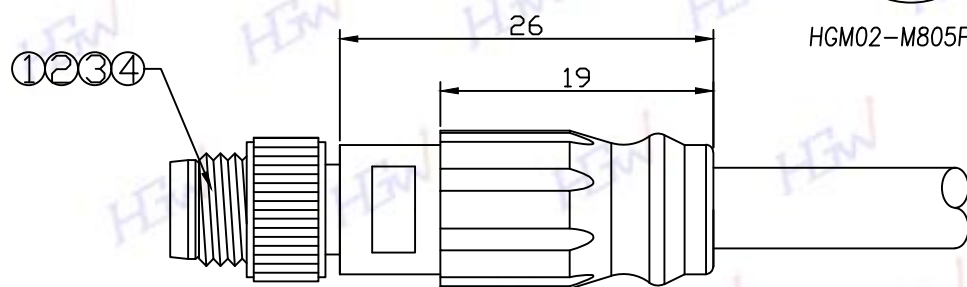

NUT for 5',6' PIN



NUT for 2,3,4 PIN

NOTES:

1.ELECTRICAL SPECIFICATION

1-1.RATED CURRENT: 4A/2A/1.5A

1-2.RATED VOLTAGE: 60V/30V

1-3.WATERPROOF: IP67

2.ENVIRONMENTAL

2-1.OPERATION TEMPERATURE: -20°~80°C

3.PART NUMBER SPECIFICATION

3-1.HGMxx-M8xxP-CB

02 - 2 PINS 03 - 3 PINS

04 - 4 PINS 05 - 5 PINS

06 - 6 PINS 08 - 8 PINS

04-CURRENT RATING 4A

02-CURRENT RATING 2A

01.5-CURRENT RATING 1.5A

1.CONNECTOR: M8 MALE CONNECTOR ,for1

2.CONTACT: BRASS,MALE PIN,NICKEL PLATED ,forN

3.RING NUT: BRASS,NICKEL PLATED (WITH RATCHET MECHANISM, WITHOUT SLEEVE) ,for1

4.MOLDING: PVC ,for1

禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		220111

客戶簽名確認章

TITLE
M8 MALE MOLDING CABLE

P/N:

DWG. NO: HGMxx-M8xxP-CB

DR. Dan



UNIT: mm

CH. Jason

SCALE

2:1

AP. Lanny

UNLESS OTHERWISE
SPECIFIED TOLERANCES:

REV. A SHEET 1/1

X ± 0.20 XXX ± 0.05
XX ± 0.10 ANGLE ± 1°