




HGM2-DS04P-229-11






HGM2-DS05P-127-11



HGM2-DS06P-80-11



HGM2-DS07P-12-11

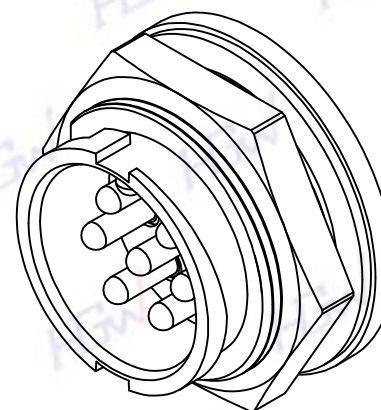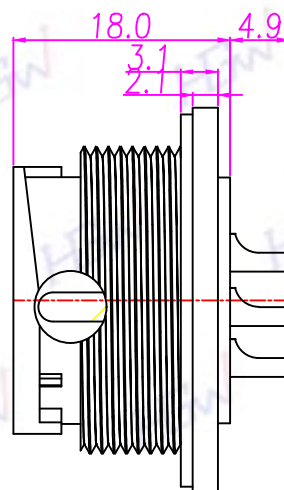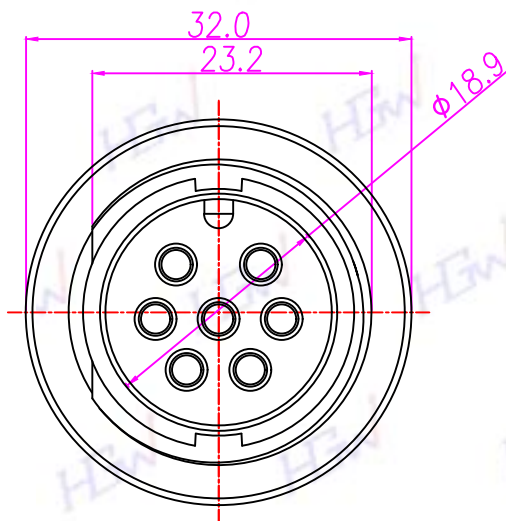

1.MATERIAL

- 1-1.HOUSING: PA66
- 1-2.CONTACT: BRASS
- 1-3.GASKET: SILICONE
- 1-4.HEX NUT: PA66

2.FINISH


- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 20A
- 3-2.RATED VOLTAGE: 300V

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE:
-40°C~105°C

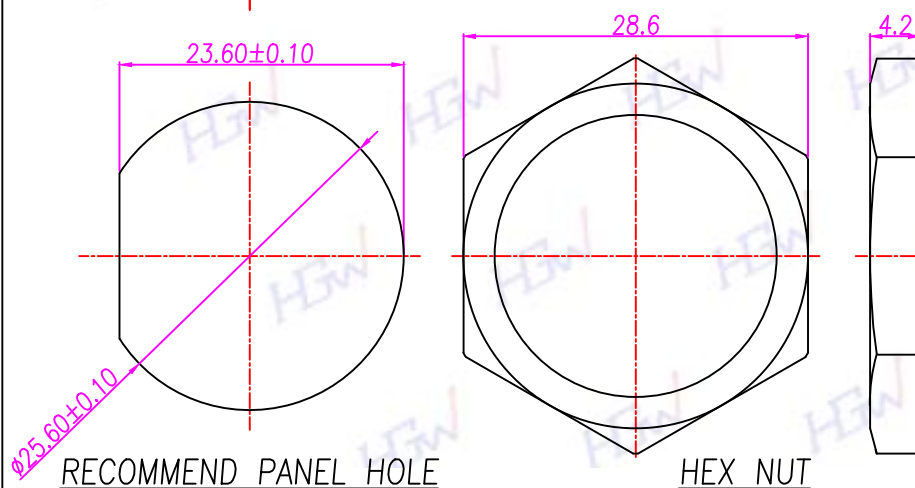

禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		180905

客戶圖面確認簽回章

TITLE
D SIZE(M)前鎖半牙線式20A

P/N:

DWG. NO: QC8487

DR. Dan  UNIT: mm

CH. Jason SCALE 1:1

AP. Lanny
UNLESS OTHERWISE SPECIFIED TOLERANCES:
REV. A SHEET 1/1
X ± 0.1 XXX ± 0.03
XX ± 0.05 ANGLE ± 1°