

TABLE A

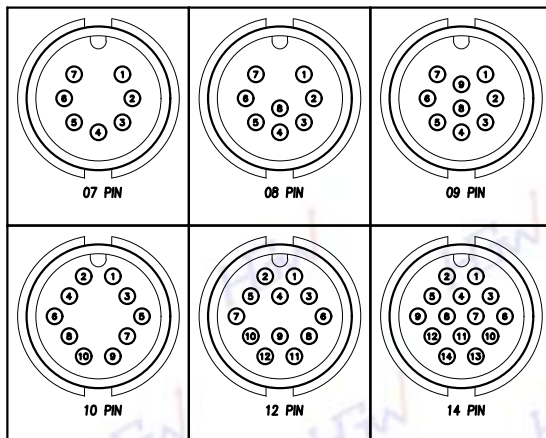


TABLE A

P/N	CABLE OD
HGF2-CS07P-17-11	ø6.5mm~ø7.6mm
HGF2-CS08P-122-11	ø6.5mm~ø7.6mm
HGF2-CS09P-30-11	ø6.5mm~ø7.6mm
HGF2-CS10P-18-11	ø6.5mm~ø7.6mm
HGF2-CS12P-37-11	ø6.5mm~ø7.6mm
HGF2-CS14P-01-11	ø6.5mm~ø7.6mm
HGF2-CS14P-04-11	ø8.6mm~ø9.6mm



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		180910
B	修改料號	220106
C	新增規格	230612

客戶圖面確認簽回章

TITLE
C SIZE<F>半牙組裝式


P/N: SEE TABLE A

DWG. NO: QC8619

DR. Dan  UNIT: mm

CH. Jason SCALE 1:1

AP. Lanny
UNLESS OTHERWISE SPECIFIED TOLERANCES:
REV. C SHEET 1/1
X ± 0.20 XXX ± 0.05
XX ± 0.10 ANGLE ± 1°

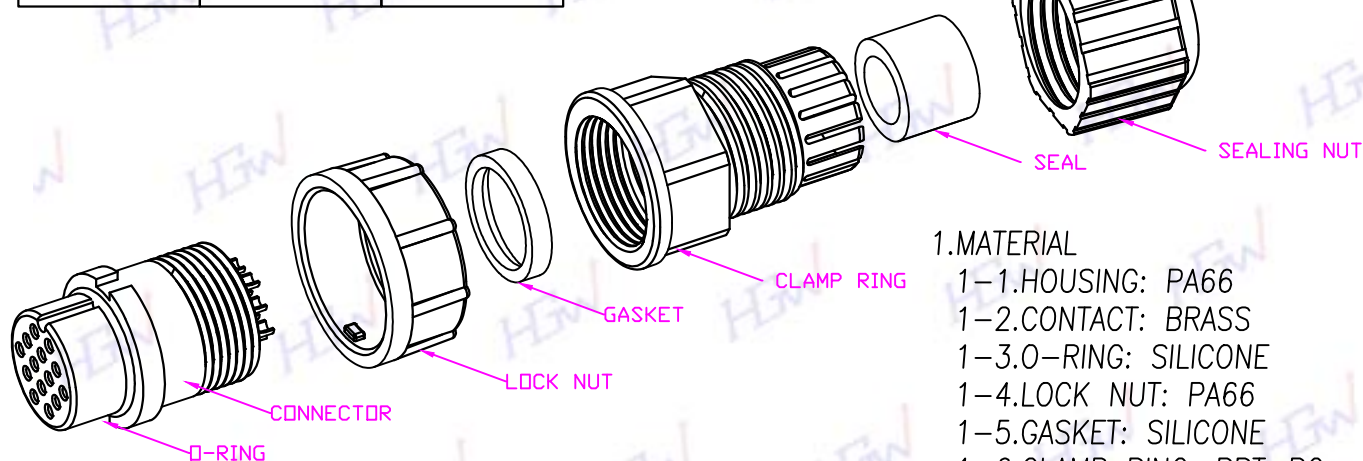

1.MATERIAL

- 1-1.HOUSING: PA66
- 1-2.CONTACT: BRASS
- 1-3.O-RING: SILICONE
- 1-4.LOCK NUT: PA66
- 1-5.GASKET: SILICONE
- 1-6.CLAMP RING: PBT+PC
- 1-7.SEAL: SILICONE
- 1-8.SEALING NUT: PA66

2.FINISH

- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 5A
- 3-2.RATED VOLTAGE: 250V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C

