



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.



REV	DESCRIPTION	DATE
A		171218

客戶圖面確認簽回章

TITLE M12(F)金屬組裝式		
P/N: SEE TABLE A		
DWG. NO: QC5878		
DR. Dan		UNIT: mm
CH. Jason	SCALE	1:1
AP. Lanny		UNLESS OTHERWISE SPECIFIED TOLERANCES:
REV. A	SHEET 1/1	X ± 0.20 XXX ± 0.05 XX ± 0.10 ANGLE ± 1°

Pin Assignments
Front View

TABLE A	10p	8p	7p	6p-Standard	6p
GOLD 10u"		HGF2-M1208P-69-11			
GOLD FLASH	HGF2-M1210P-08-11	HGF2-M1208P-33	HGF2-M1207P-24-11	HGF2-M1206P-93-11	HGF2-M1206P-92-11

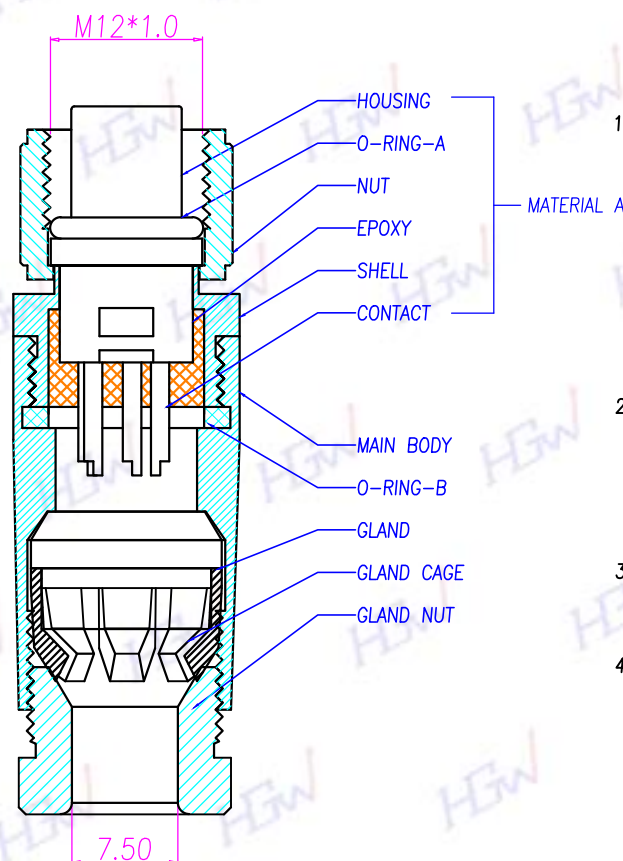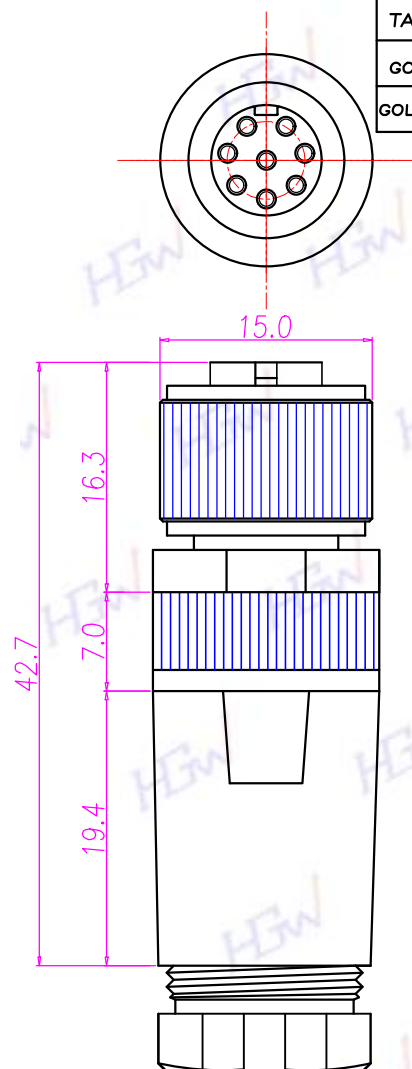

- 1.MATERIAL
1-1.MATERIAL A
a.HOUSING: PBT UL94V-0 ; COLOR: BLACK
b.CONTACT: BRASS
c.NUT: ALUMINIUM ALLOY
d.SHELL: ALUMINUM ALLOY
e.O-RING: EPDM ; COLOR: BLACK
1-2.MAIN BODY: ALUMINIUM ALLOY
1-3.GLAND: SILICONE ; COLOR: BLACK
1-4.GLAND CAGE: POM ; COLOR: WHITE
1-5.GLAND NUT: ALUMINIUM ALLOY
1-6.O-RING B: SILICONE ; COLOR: BLACK
2.FINISH
2-1.MATERIAL A
a.CONTACT: SEE TABLE A
b.NUT: SATIN NICKEL PLATED
c.SHELL: SATIN NICKEL PLATED
2-2.MAIN BODY: SATIN NICKEL PLATED
2-3.GLAND NUT: SATIN NICKEL PLATED
3.ELECTRICAL SPECIFICATION
3-1.RATED CURRENT: 2A
3-2.RATED VOLTAGE: 30V
3-3.WATERPROOF: IP67
4.ENVIRONMENTAL
4-1.OPERATION TEMPERATURE: -20°C~85°C