


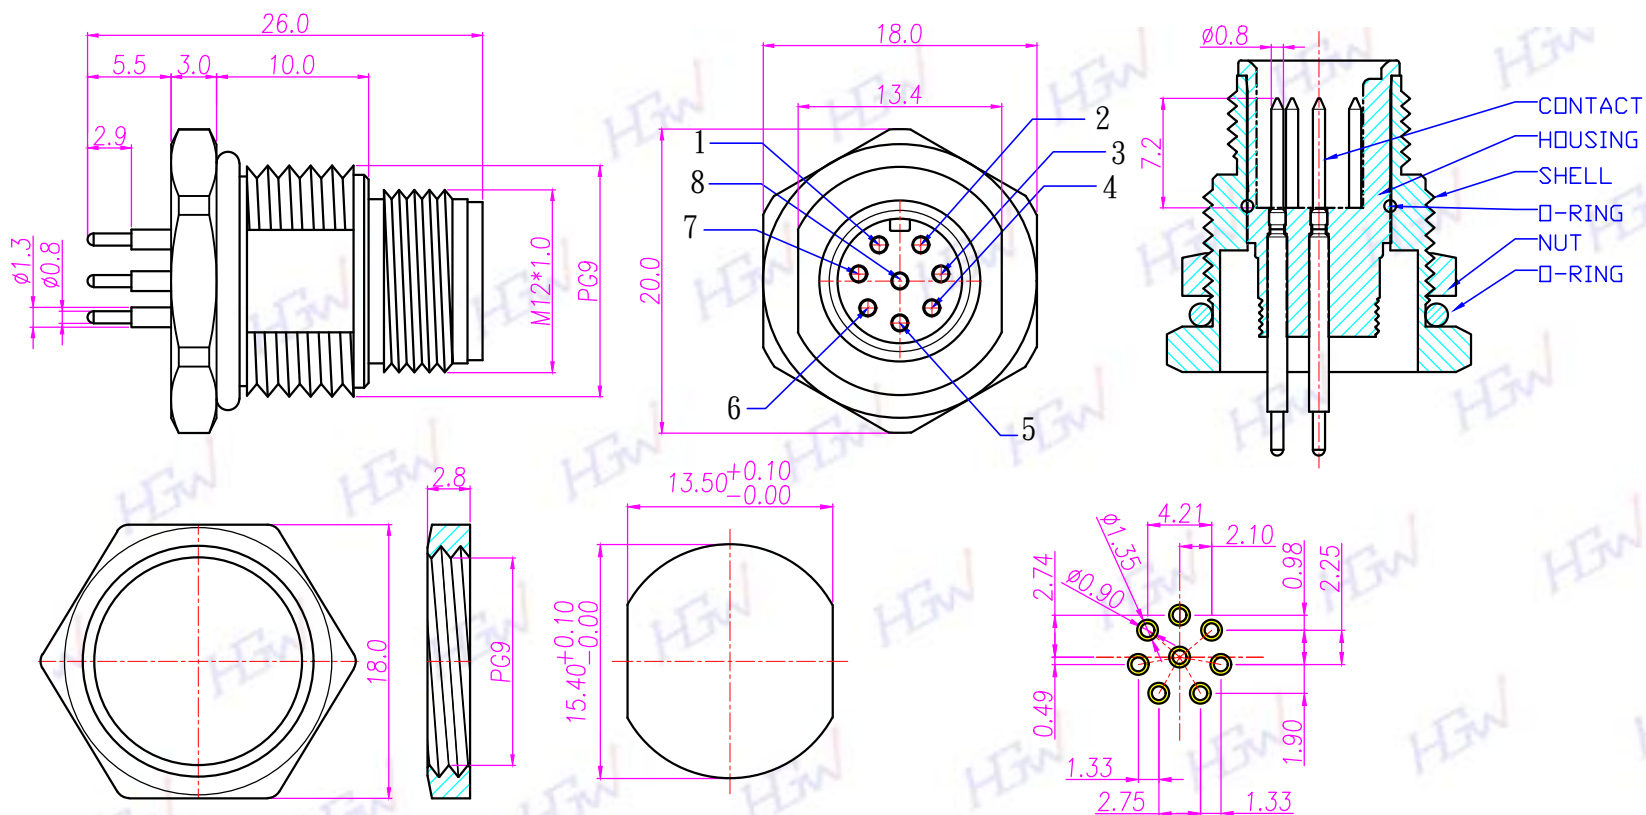

NUT(SEE TABLE A)

RECOMMEND PANEL CUT-OUT

RECOMMEND P.C.B LAYOUT

TABLE A

|                   |                   |
|-------------------|-------------------|
|                   |                   |
| 8PIN              | 7PIN              |
| HGM2-M1208P-42-11 | HGM2-M1207P-28-11 |
| HGM2-M1207P-28-11 | 雙邊倒角              |
| HGM2-M1208P-42-11 | 單邊倒角              |
| PART No.          | NUT倒角             |

#### 1.MATERIAL

- 1-1.HOUSING: PBT UL94V-0 ; COLOR: BLACK
- 1-2.CONTACT: BRASS
- 1-3.NUT: BRASS
- 1-4.SHELL: BRASS
- 1-5.O-RING: EPDM

#### 2.FINISH

- 2-1.CONTACT: 10 MICRO INCHES MIN. GOLD PLATED
- UNDER PLATE: NICKEL
- 2-2.NUT: NICKEL PLATED
- 2-3.SHELL: NICKEL PLATED

#### 3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 2A
- 3-2.RATED VOLTAGE: 30V
- 3-3.WATERPROOF: IP67

#### 4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~85°C



禾剛企業有限公司  
HOU GUN ENTERPRISE CO., LTD.

| REV | DESCRIPTION | DATE   |
|-----|-------------|--------|
| A   |             | 241119 |

客戶確認簽回章

TITLE

M12(M)前鎖插板式

P/N: SEE TABLE A

DWG. NO: QC6690

DR. Dan UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny  
UNLESS OTHERWISE SPECIFIED TOLERANCES:  
X  $\pm 0.20$  XXX  $\pm 0.05$   
XX  $\pm 0.10$  ANGLE  $\pm 1^\circ$   
REV. A SHEET 1/1