

Pin Assignments
Front View

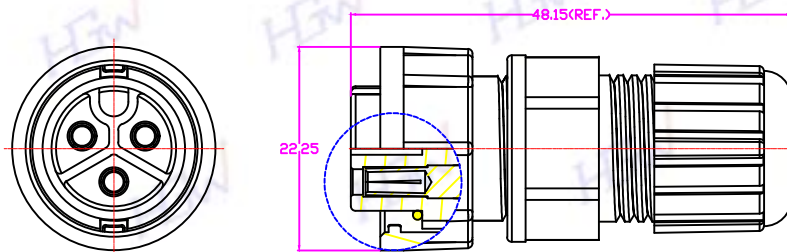
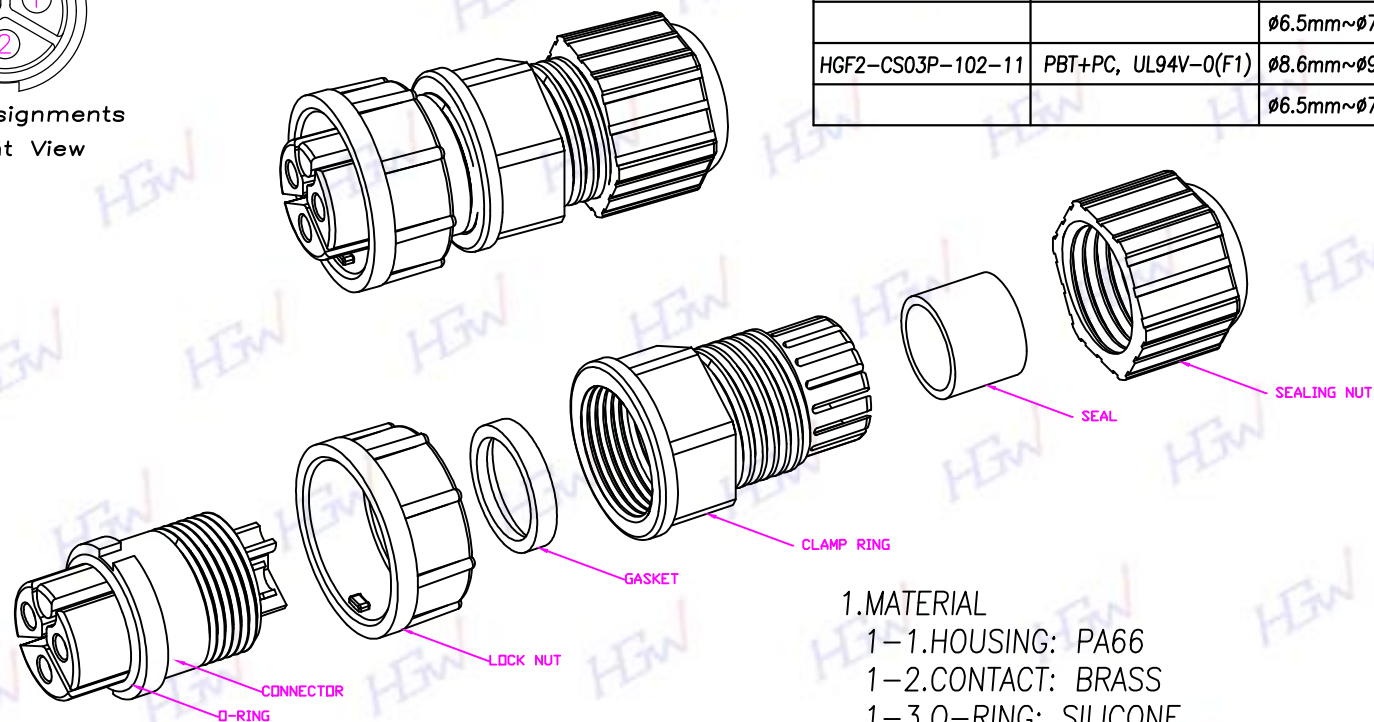


TABLE A

P/N	MATERIAL(CLAMP RING)	CABLE ODφ
HGF2-CS03P-95-11	PA66	φ8.6mm~φ9.6mm
		φ6.5mm~φ7.6mm
HGF2-CS03P-102-11	PBT+PC, UL94V-0(F1)	φ8.6mm~φ9.6mm
		φ6.5mm~φ7.6mm

1.MATERIAL

- 1-1.HOUSING: PA66
- 1-2.CONTACT: BRASS
- 1-3.O-RING: SILICONE
- 1-4.LOCK NUT: PA66
- 1-5.GASKET: SILICONE
- 1-6.CLAMP RING: SEE TABLE A
- 1-7.SEAL: SILICONE
- 1-8.SEALING NUT: PA66

2.FINISH

- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 20A
- 3-2.RATED VOLTAGE: 250V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		181030

客戶簽名確認章

TITLE C SIZE-3P(F)
半牙組裝式 20A (三防呆)

P/N: SEE TABLE A

DWG. NO: QC8632

DR. Dan  UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny UNLESS OTHERWISE SPECIFIED TOLERANCES:

REV.	SHEET	X ± 0.20	XXX ± 0.05
A	1/1	XX ± 0.10	ANGLE ± 1°