

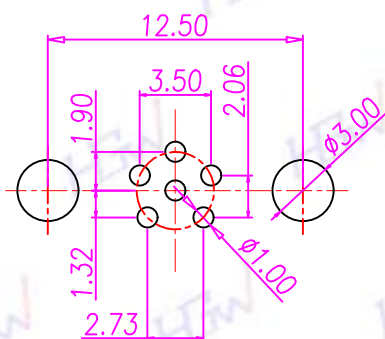
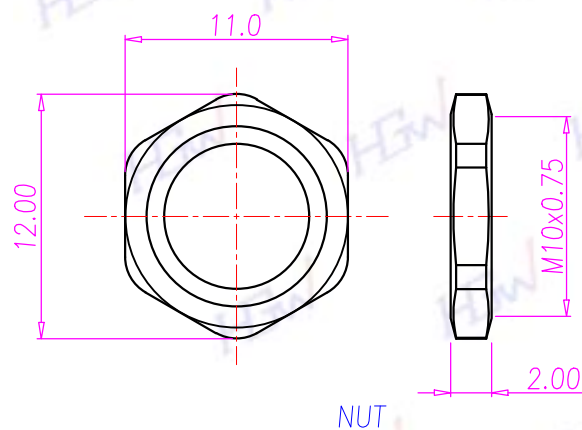

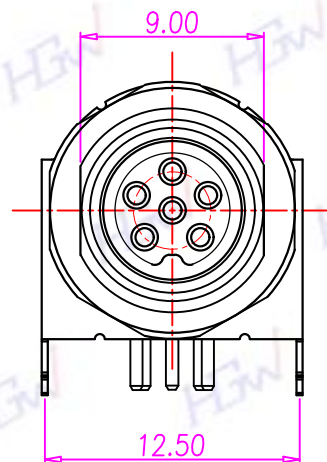
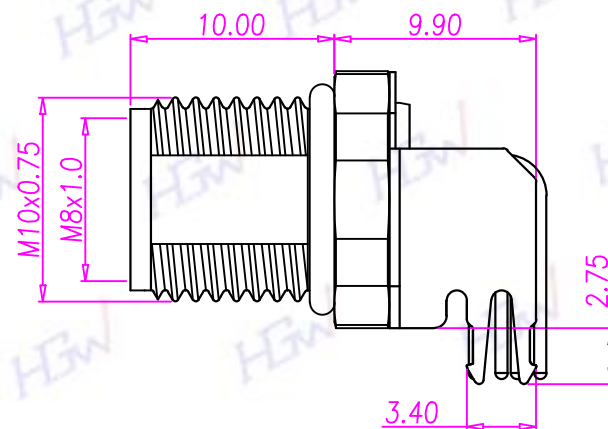


TABLE A

	
HGF3-M805P-02-11	HGF3-M806P-01-11

P.C.B LAYOUTNUTRECOMMEND PANEL CUT-OUT

1.MATERIAL

1-1.HOUSING: PA66 UL94V-0 ; COLOR: BLACK

1-2.CONTACT: BRASS

1-3.NUT: BRASS

1-4.SHELL: BRASS

1-5.O-RING: NBR

1-6.GROUND: PHOSPHOR BRONZE

2.FINISH

2-1.CONTACT: 10 MICRO INCHES MIN. GOLD PLATED
UNDER PLATE: NICKEL

2-2.NUT: NICKEL PLATED

2-3.SHELL: NICKEL PLATED

2-4.GROUND: BIRGHT TIN PLATED

3.ELECTRICAL SPECIFICATION

3-1.RATED CURRENT: 2A

3-2.RATED VOLTAGE: 30V

3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

4-1.OPERATION TEMPERATURE: -40~85°C



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		200316

客 戶 簽 名 確 認 章

TITLE

M8(F)前鎖90度插板式

P/N: SEE TABLE A

DWG. NO: QC8010

DR. Dan  UNIT: mm

CH. Jason SCALE 1:1

AP. Lanny
UNLESS OTHERWISE SPECIFIED TOLERANCES:
REV. A SHEET 1/1
X ± 0.20 XXX ± 0.05
XX ± 0.10 ANGLE $\pm 1^\circ$