




HGF20-CS03P-CB




HGF10-CS04P-CB



HGF10-CS05P-CB



HGF10-CS06P-CB




HGF05-CS07P-CB




HGF05-CS07P-CB




HGF05-CS09P-CB




HGF05-CS10P-CB




HGF05-CS12P-CB




HGF05-CS14P-CB



HGF02-CS18P-CB



HGF02-CS20P-CB

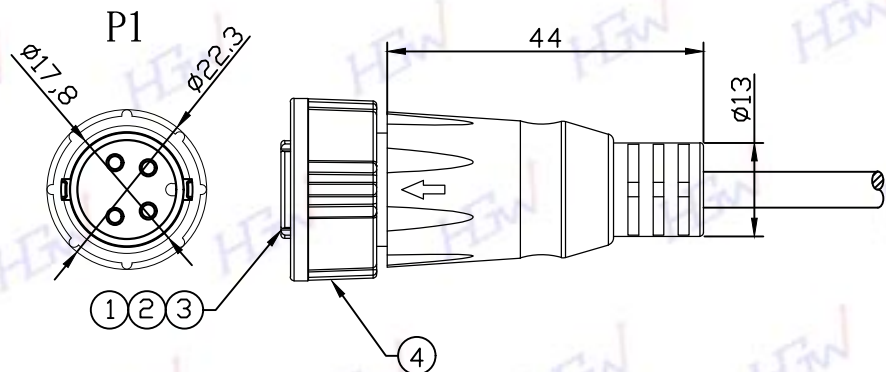

- 1.CONNECTOR: C SIZE FEMALE CONNECTOR ,for1
2.CONTACT: BRASS,FEMALE PIN,GOLD FLASH ,forN
3.LOCK NUT: NYLON+GF ,for1
4.O-RING: SILICON ,for1
5.MOLDING: PVC ,for1

NOTES:

1.ELECTRICAL SPECIFICATION

- 1-1.RATED CURRENT: 20A/10A/5A/2A
1-2.RATED VOLTAGE: 250V
1-3.WATERPROOF: IP67

2.ENVIRONMENTAL

- 2-1.OPERATION TEMPERATURE: -20°~80°C

3.PART NUMBER SPECIFICATION

- 3-1.HGFxx-CSxxP-CB

- 03 - 3 PINS 04 - 4 PINS
05 - 5 PINS 06 - 6 PINS
07 - 7 PINS 08 - 8 PINS
09 - 9 PINS 10 - 10 PINS
12 - 12 PINS 14 - 14 PINS
18 - 18 PINS 20 - 20 PINS

- 20-CURRENT RATING 20A
10-CURRENT RATING 10A
05-CURRENT RATING 5A
02-CURRENT RATING 2A

禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		220106

客戶簽名確認章

TITLE
CIRCULAR C SIZE LOCK TYPE
FEMALE CABLE

P/N:

DWG. NO: HGFxx-CSxxP-CB

DR. Dan

CH. Jason

AP. Lanny

REV. A

SHEET
1/1

UNLESS OTHERWISE
SPECIFIED TOLERANCES:
X ± 0.20 XXX ± 0.05
XX ± 0.10 ANGLE ± 1°