



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		170802

TABLE A

HGF2-M806P-48-11	HGF2-M805P-120-11

1.MATERIAL

- 1-1.HOUSING: PBT UL94V-0 ; COLOR: BLACK
- 1-2.CONTACT: BRASS
- 1-3.NUT: BRASS
- 1-4.SHELL: BRASS
- 1-5.O-RING: EPDM ; COLOR: BLACK

2.FINISH

- 2-1.CONTACT: GOLD FLASH
- 2-2.NUT: NICKEL PLATED
- 2-3.SHELL: NICKEL PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 2A
- 3-2.RATED VOLTAGE: 30V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C

客戶圖面確認簽回章

TITLE

M8(F)後鎖焊線式 (梅花92度)

P/N: SEE TABLE A

DWG. NO: QC7515



DR. Dan UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny

UNLESS OTHERWISE SPECIFIED TOLERANCES:

REV.	SHEET	X ± 0.20	XXX ± 0.05
A	1/1	XX ± 0.10	ANGLE $\pm 1^\circ$

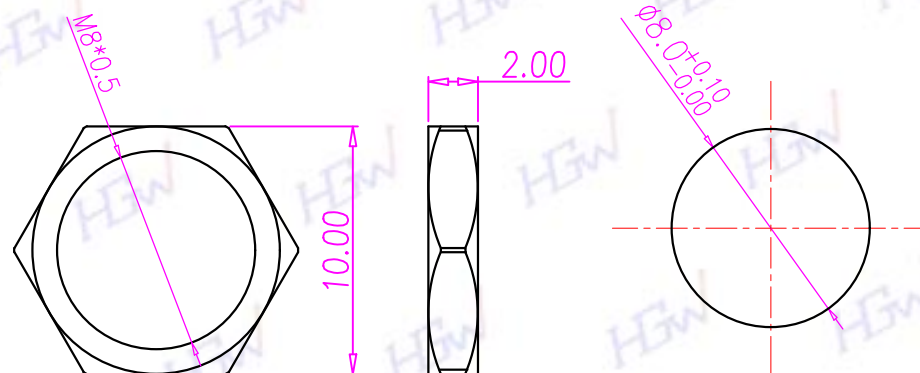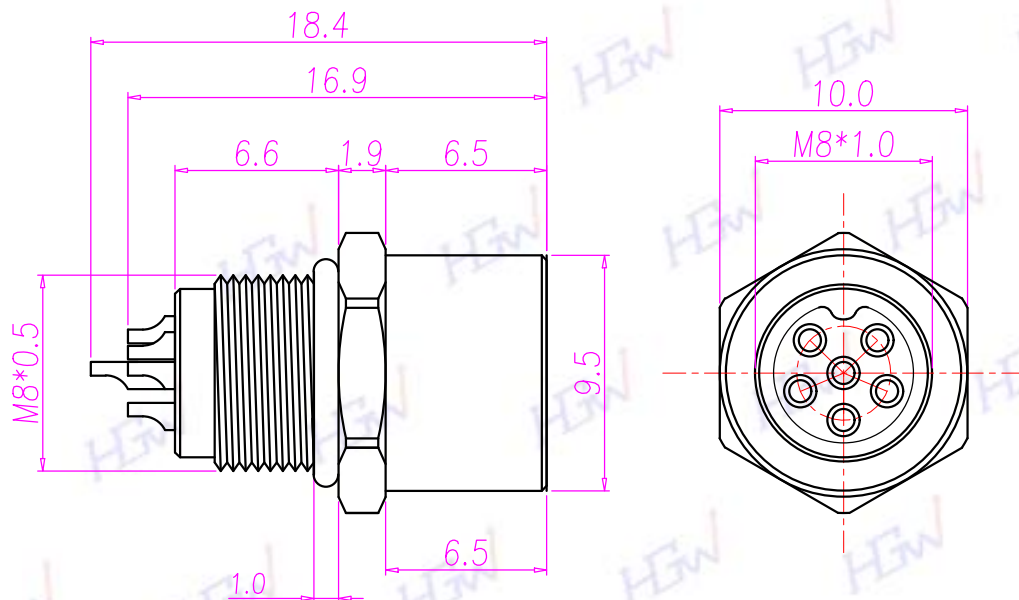

NUT

RECOMMEND PANEL CUT-OUT