

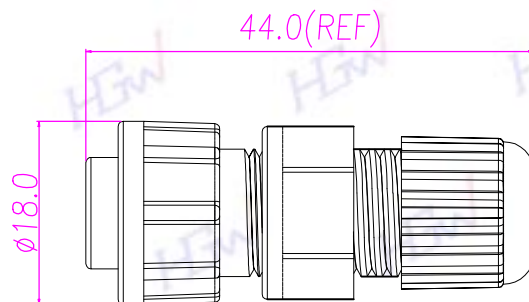
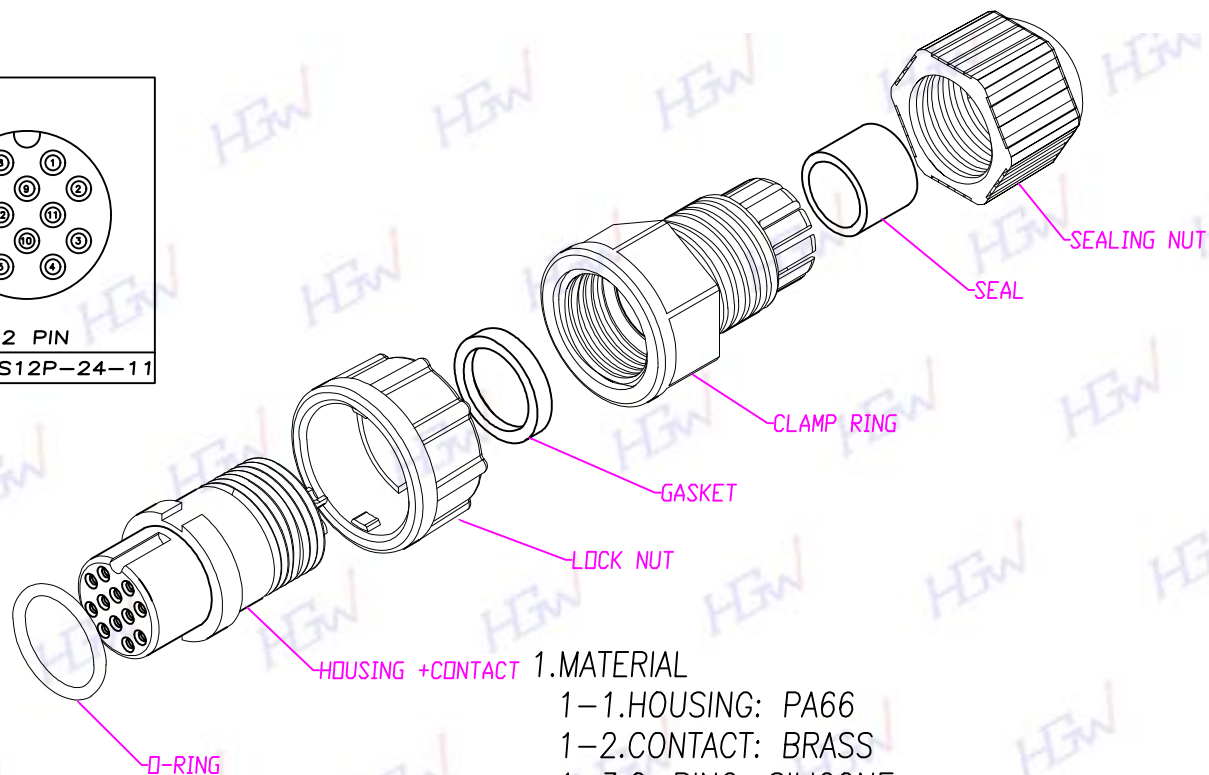


TABLE A

	
10 PIN	12 PIN
HGF2-BS10P-15-11	HGF2-BS12P-24-11

PIN ASSIGNMENTS
FRONT VIEW

1. MATERIAL

- 1-1. HOUSING: PA66
- 1-2. CONTACT: BRASS
- 1-3. O-RING: SILICONE
- 1-4. LOCK NUT: PA66
- 1-5. GASKET: SILICONE
- 1-6. CLAMP RING: PA66
- 1-7. SEAL: SILICONE
- CABLE OD $\phi 4.5\text{mm} \sim 6.5\text{mm}$

2. FINISH

- 2-1. CONTACT: GOLD FLASH PLATED

3. ELECTRICAL SPECIFICATION

- 3-1. RATED CURRENT: 2A
- 3-2. RATED VOLTAGE: 250V
- 3-3. WATERPROOF: IP67

4. ENVIRONMENTAL

- 4-1. OPERATION TEMPERATURE: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		180727

Drawing confirmation signature

TITLE B SIZE(F) LOCK TYPE
ASSEMBLY 2A

P/N:

DWG. NO: QC8636

DR. Dan		UNIT: mm
---------	---	----------

CH. Jason	SCALE	1:1
-----------	-------	-----

AP. Lanny	UNLESS OTHERWISE SPECIFIED TOLERANCES:	
REV. A	SHEET 1/1	X ± 0.1 XXX ± 0.03 XX ± 0.05 ANGLE $\pm 1^{\circ}$