



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		211203

客戶圖面確認簽回章

TITLE
M12-12P(F)金屬組裝式

P/N: HGF2-M1212P-04


DWG. NO: QC5793

DR. Dan  UNIT: mm

CH. Jason SCALE 1:1

AP. Lanny
UNLESS OTHERWISE SPECIFIED TOLERANCES:
X ± 0.20 XXX ± 0.05
XX ± 0.10 ANGLE $\pm 1^\circ$

REV. A SHEET 1/1

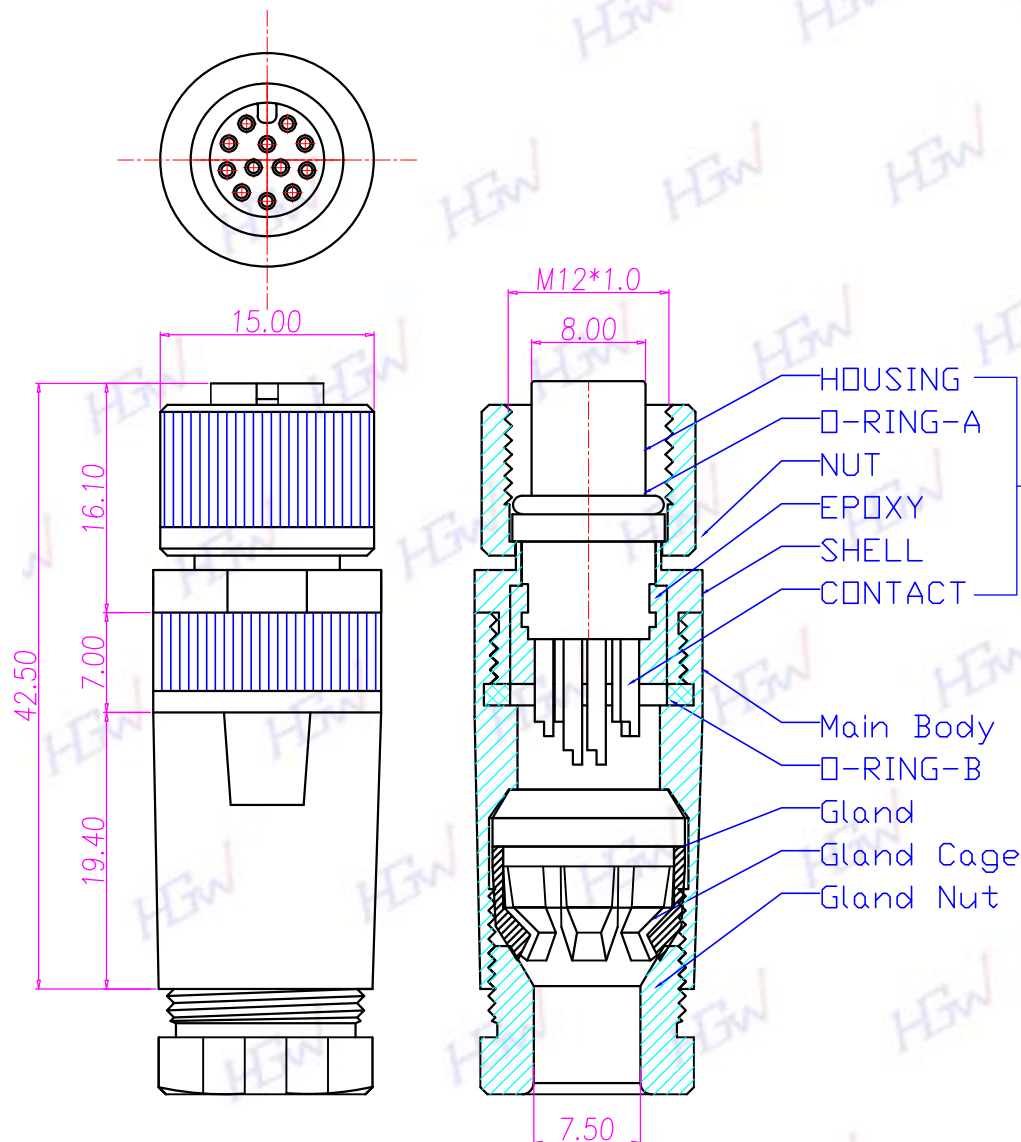

1.MATERIAL

1-1.HG-WP460

- a.HOUSING: PBT UL94V-0 ; COLOR: BLACK
- b.CONTACT: BRASS
- c.NUT: ALUMINUM ALLOY
- d.SHELL: ALUMINUM ALLOY
- e.O-RING: EPDM ; COLOR: BLACK
- f.EPOXY BASE: EF400A&EF400B ; COLOR: BLACK

1-2.MAIN BODY: ALUMINUM ALLOY

- 1-3.GLAND: SILICONE ; COLOR: BLACK
- 1-4.GLAND CAGE: POM ; COLOR: BLACK
- 1-5.GLAND NUT: ALUMINUM ALLOY

2.FINISH

2-1.HG-WP460

- a.CONTACT: GOLD FLASH MICRO INCHES MIN
UNDER PLATE: NICKEL
- b.NUT: SATIN Ni PLATED
- c.SHELL: SATIN Ni PLATED

- 2-2.MAIN BODY: SATIN Ni PLATED
- 2-3.GLAND NUT: SATIN Ni PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 1.5A
- 3-2.RATED VOLTAGE: 30V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -20°C~85°C