

TABLE A

2 PIN	3 PIN	4 PIN	5 PIN	6 PIN
HGM2-BS02P-59-11	HGM2-BS03P-101-11	HGM2-BS04P-228-11	HGM2-BS05P-154-11	HGM2-BS06P-79-11

PIN ASSIGNMENTS

1.MATERIAL

1-1.HOUSING: PA66

1-2.CONTACT: BRASS

1-3.GASKET: SILICONE

1-4.CLAMP RING: PA66

1-5.SEAL: SILICONE

CABLE: OD ϕ 4.5mm~ ϕ 6.5mm

1-6.SEALING NUT: PA66

2.FINISH

2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION


3-1.RATED CURRENT: 5A

3-2.RATED VOLTAGE: 250V

3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

4-1.OPERATION TEMPERATURE: -40°C~105°C

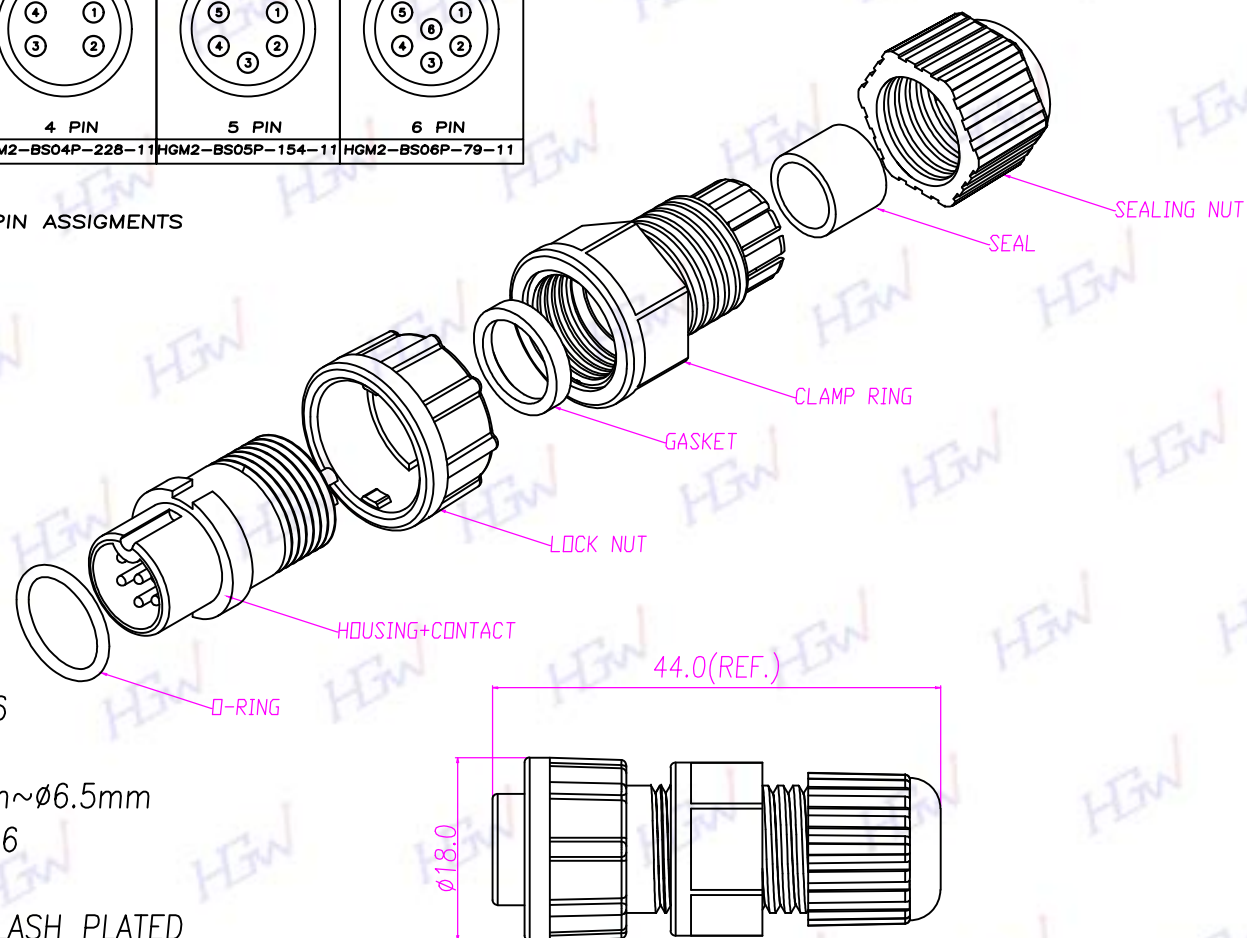

禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		180720

客戶圖面確認簽回章

TITLE B SIZE(F CONN/M PIN)
LOCK TYPE ASSEMBLY

P/N: SEE TABLE A

DWG. NO: QC8807

DR. Dan UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny
UNLESS OTHERWISE SPECIFIED TOLERANCES:
REV. A SHEET 1/1 X ± 0.20 XXX ± 0.05
XX ± 0.10 ANGLE $\pm 1^\circ$