
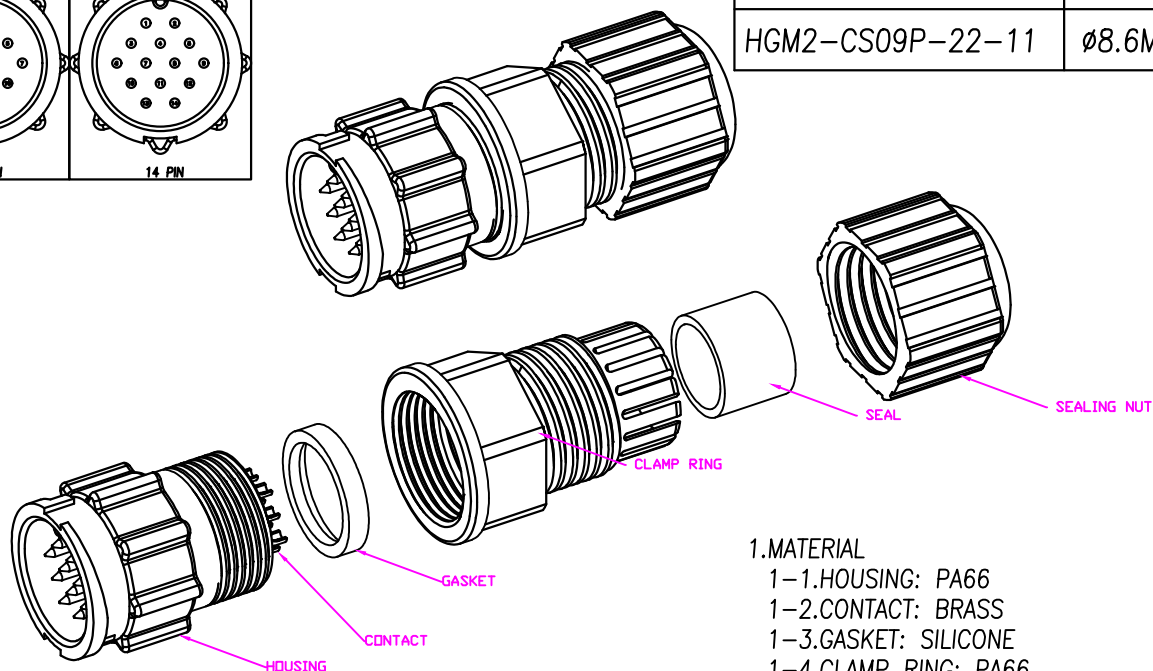


TABLE A

P/N	CABLE ODφ
HGM2-CS07P-20-11	φ6.5mm~φ7.6mm
HGM2-CS08P-104-11	φ6.5mm~φ7.6mm
HGM2-CS09P-19-11	φ6.5mm~φ7.6mm
HGM2-CS09P-22-11	φ8.6MM~φ9.6MM

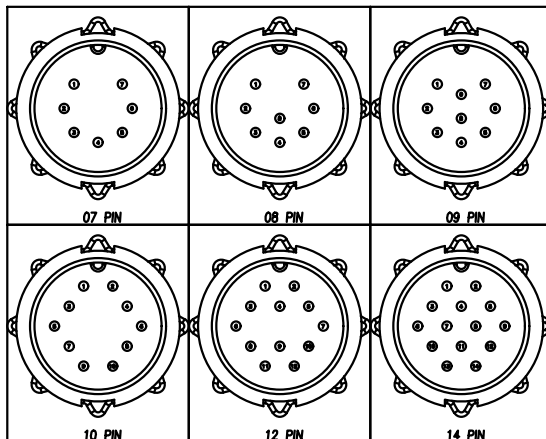

禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		181120

客戶簽名確認章

TITLE
C SIZE(M)半牙組裝式

P/N: SEE TABLE A

DWG. NO: QC9737

DR. Dan  UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny
UNLESS OTHERWISE SPECIFIED TOLERANCES:
REV. A SHEET 1/1
X ± 0.20 XXX ± 0.05
XX ± 0.10 ANGLE ± 1°

1.MATERIAL

- 1-1.HOUSING: PA66
- 1-2.CONTACT: BRASS
- 1-3.GASKET: SILICONE
- 1-4.CLAMP RING: PA66
- 1-5.SEAL: SILICONE
- 1-6.SEALING NUT: PA66

2.FINISH

- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 5A
- 3-2.RATED VOLTAGE: 250V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C