





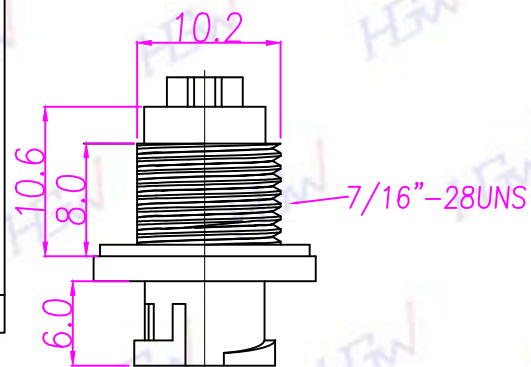
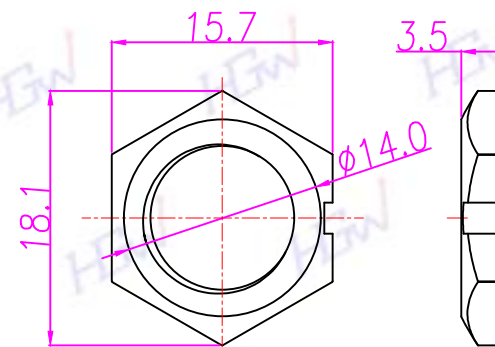


TABLE A

	
HGM2-AS02P-75-11	HGM2-AS03P-126-11

PIN ASSIGNMENTS
FRONT VIEWRECOMMENDED
PANEL
CUT-OUT

HEX NUT

1. MATERIAL

- 1-1.HOUSING: PA66
1-2.CONTACT: BRASS
1-3.GASKET: SILICON
1-4.HEX NUT: PA66

2.FINISH

- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 5A
3-2.RATED VOLTAGE: 250V
3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE:
-40°C~105°C



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		180716

客戶圖面確認簽回章

TITLE A SIZE M CON M PIN
REAR FASTENED(LOCK BAYONET)
SOLDER TYPE 5A

P/N: SEE TABLE A

DWG. NO: QC9761

DR. Dan  UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny UNLESS OTHERWISE SPECIFIED TOLERANCES:

REV. A	SHEET 1/1	X ± 0.20 XXX ± 0.05 XX ± 0.10 ANGLE ± 1°
--------	-----------	---