





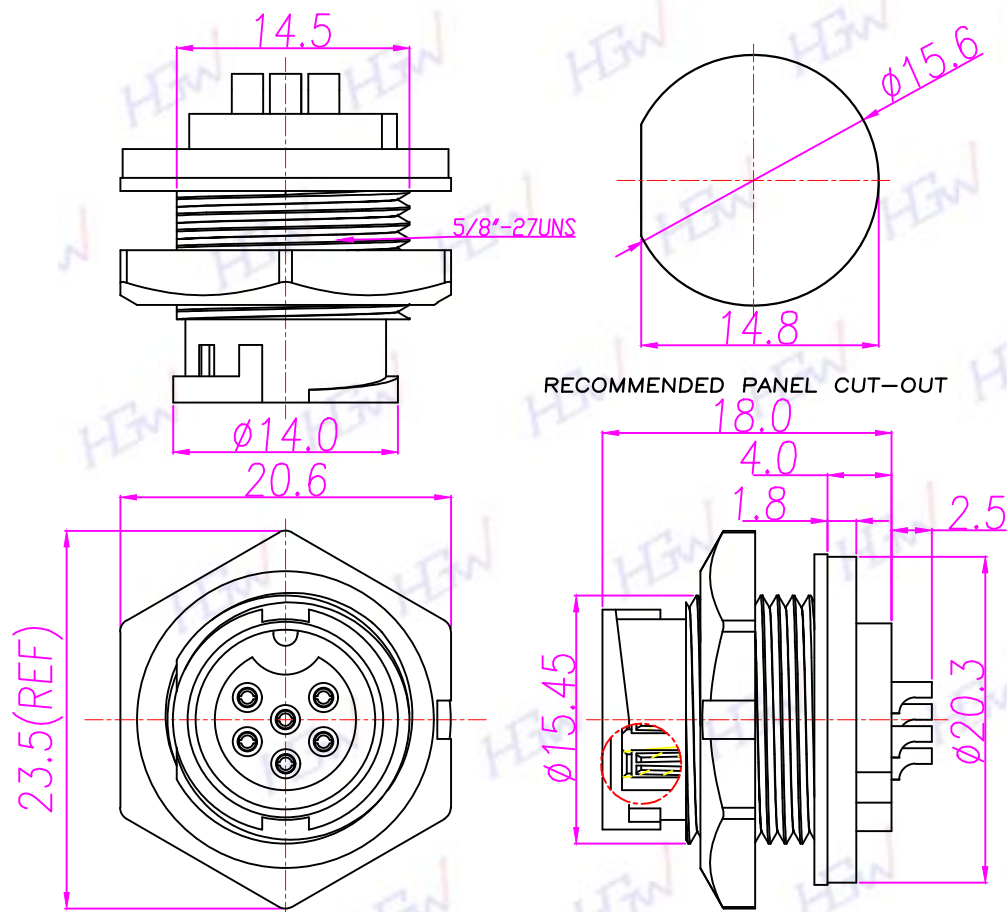


TABLE A

				
2 PIN	3 PIN	4 PIN	5 PIN	6 PIN
HGF2-BS02P-59-11		HGF2-BS04P-266-11	HGF2-BS05P-199-11	HGF2-BS06P-78-11

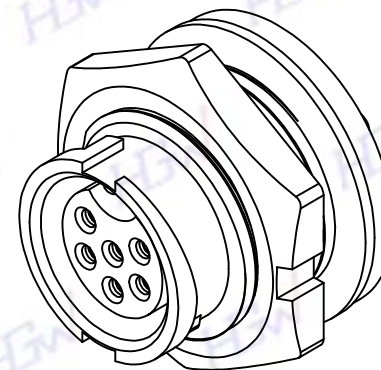

1.MATERIAL

- 1-1.HOUSING: PA66
- 1-2.CONTACT: BRASS
- 1-3.O-RING: SILICONE
- 1-4.HEX NUT: PA66

2.FINISH

- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 5A
- 3-2.RATED VOLTAGE: 250V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE:
-40°C~105°C



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		180727

Drawing confirmation signature

TITLE B SIZE(M CONN/F PIN)
前鎖焊線式 5A

P/N:

DWG. NO: QC8735

DR. Dan		UNIT:mm
---------	---	---------

CH. Jason	SCALE	1:1
-----------	-------	-----

AP. Lanny		UNLESS OTHERWISE SPECIPED TOLERANCES: X ± 0.1 XXX ± 0.03 XX ± 0.05 ANGLE $\pm 1^\circ$
REV. A	SHEET 1/1	