
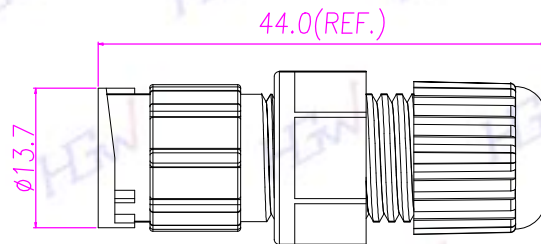


4 PIN

HGM2-BS04P-193-11

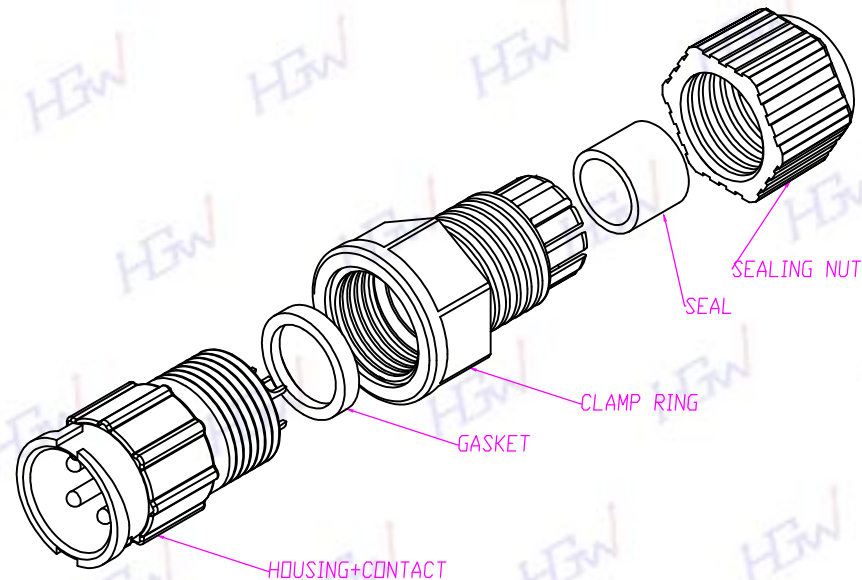

1.MATERIAL

1-1.HOUSING: PA66

1-2.CONTACT: BRASS

1-3.GASKET: SILICONE

1-4.CLAMP RING: PA66

1-5.SEAL: SILICONE

CABLE: OD ϕ 4.5mm~ ϕ 6.5mm

1-6.SEALING NUT: PA66

2.FINISH

2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

3-1.RATED CURRENT: 10A

3-2.RATED VOLTAGE: 250V

3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

4-1.OPERATION TEMPERATURE: -40°C~105°C



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		180720

客戶圖面確認簽回章

TITLE B SIZE(M)LOCK TYPE
ASSEMBLY

P/N: HGM2-BS04P-193-11

DWG. NO: QC9362

DR. Dan  UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny		UNLESS OTHERWISE SPECIFIED TOLERANCES:	
REV.	SHEET	X ± 0.1	XXX ± 0.03
A	1/1	XX ± 0.05	ANGLE $\pm 1^\circ$