

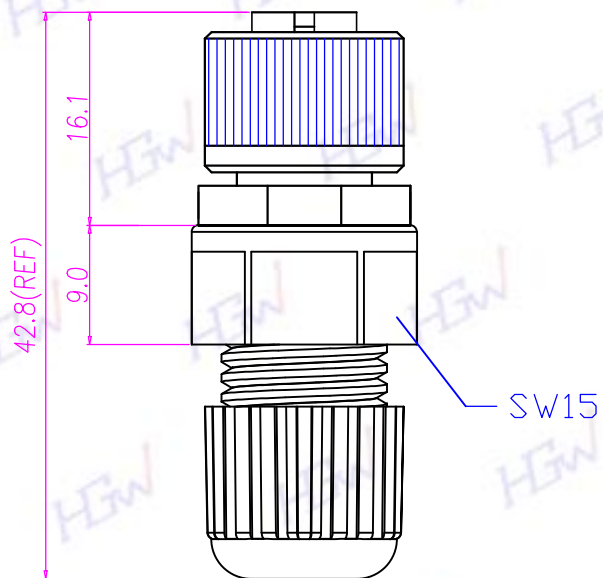


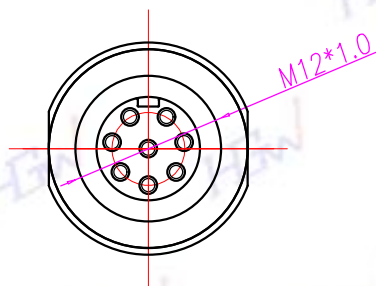

RECOMMEND CABLE OD=5.0mm~6.8mm

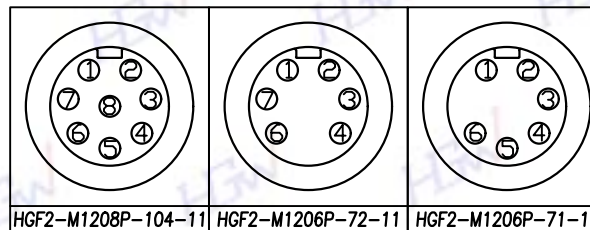

1.MATERIAL

- 1-1.HOUSING: PBT UL94V-0 ; COLOR: BLACK
- 1-2.CONTACT: BRASS
- 1-3.SHELL: BRASS
- 1-4.O-RING: EPDM
- 1-5.NUT: ALUMINUM ALLOY
- 1-6.GASKET: SILICONE
- 1-7.CLAMP RING: PA66
- 1-8.SEAL: SILICONE
- 1-9.SEALING NUT: PA66

2.FINISH

- 2-1.CONTACT: GOLD FLASH PLATED
- 2-2.NUT: NICKEL PLATED
- 2-3.SHELL: NICKEL PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 2A
- 3-2.RATED VOLTAGE: 30V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		190804

客戶簽名確認章

TITLE
M12(F)組裝式(塑膠本體)

P/N: SEE TABLE A

DWG. NO: QC8681

DR. Dan  UNIT: mm

CH. Jason  SCALE 1:1

AP. Lanny  UNLESS OTHERWISE SPECIFIED TOLERANCES:
REV. A SHEET 1/1 X ± 0.20 XXX ± 0.05
XX ± 0.10 ANGLE ± 1°