
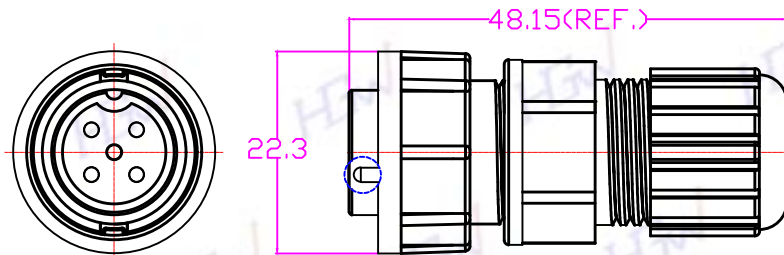
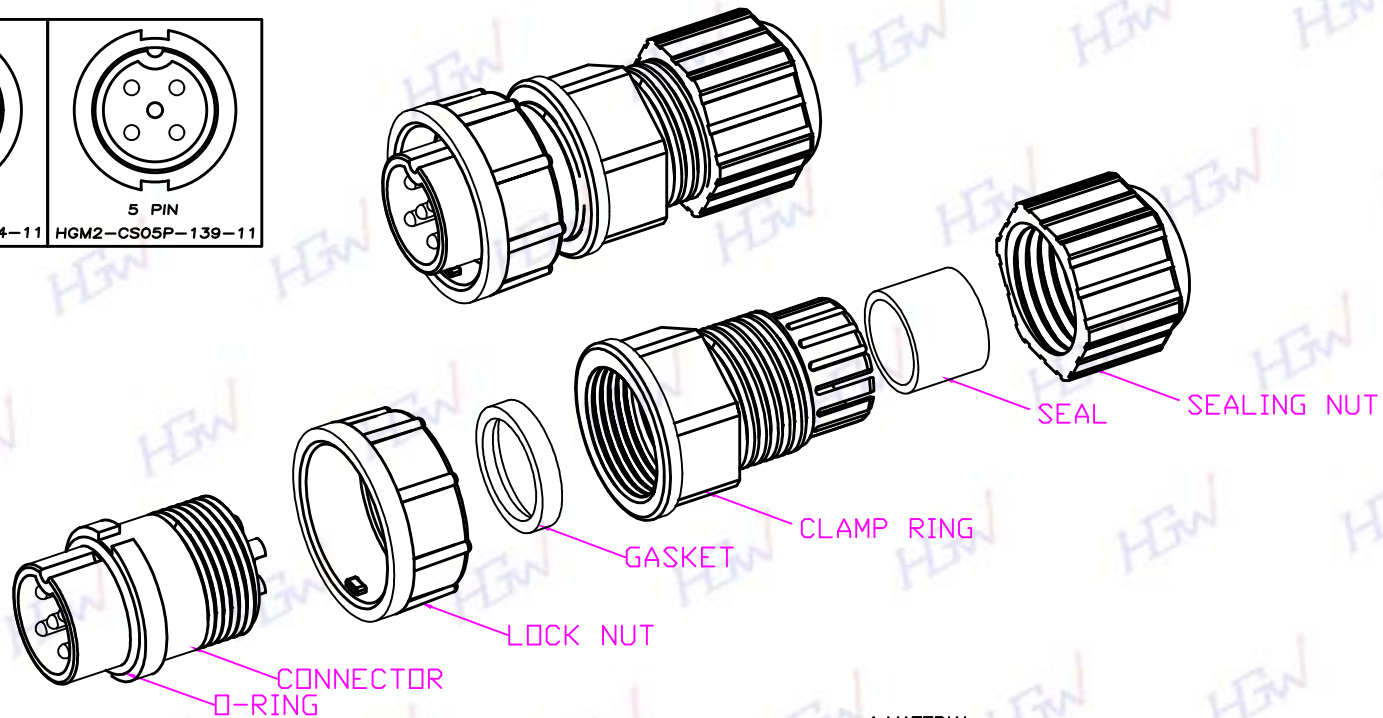


TABLE A

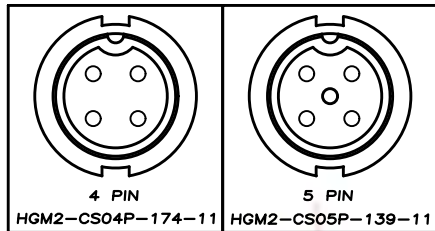

1.MATERIAL

- 1-1.HOUSING: PA66
- 1-2.CONTACT: BRASS
- 1-3.O-RING: SILICONE
- 1-4.LOCK NUT: PA66
- 1-5.GASKET: SILICONE
- 1-6.CLAMP RING: PA66
- CABLE OD ϕ 6.5mm~7.6mm
- 1-7.SEAL: SILICONE
- 1-8.SEALING NUT: PA66

2.FINISH

- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 10A
- 3-2.RATED VOLTAGE: 250V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		190401

客戶簽名確認章

TITLE

C SIZE 母身公針組裝式(半牙)

P/N: SEE TABLE A

DWG. NO: QC9045

DR. Dan



UNIT: mm

CH. Jason

SCALE

1:1

AP. Lanny

UNLESS OTHERWISE
SPECIFIED TOLERANCES:

REV. A	SHEET 1/1	$X \pm 0.20$ XXX ± 0.05 $XX \pm 0.10$ ANGLE $\pm 1^\circ$
-----------	--------------	--