



TABLE A

|                                                                                   |                                                                                   |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|  |  |
| 2 PIN                                                                             | 3 PIN                                                                             |
| HGF2-AS02P-60-11                                                                  | HGF2-AS03P-112-11                                                                 |

PIN ASSIGMENTS  
FRONT VIEW

## 1. MATERIAL

- 1-1.HOUSING: PA66
- 1-2.CONTACT: BRASS
- 1-3.O-RING A: SILICONE
- 1-4.LOCK NUT: PA66
- 1-5.MAIN BODY: PA66
- 1-6.O-RING B: EPDM
- 1-7.O-RING C: NBR
- 1-8.GLAND CAGE: PA66
- 1-9.GLAND NUT: PA66

## 2.FINISH




- 2-1.CONTACT: GOLD FLASH PLATED

## 3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 5A
- 3-2.RATED VOLTAGE: 250V
- 3-3.WATERPROOF: IP67

## 4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -20°C~80°C

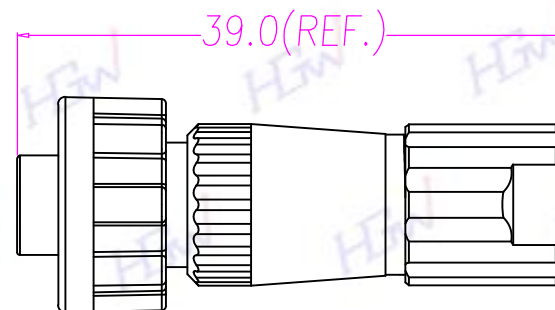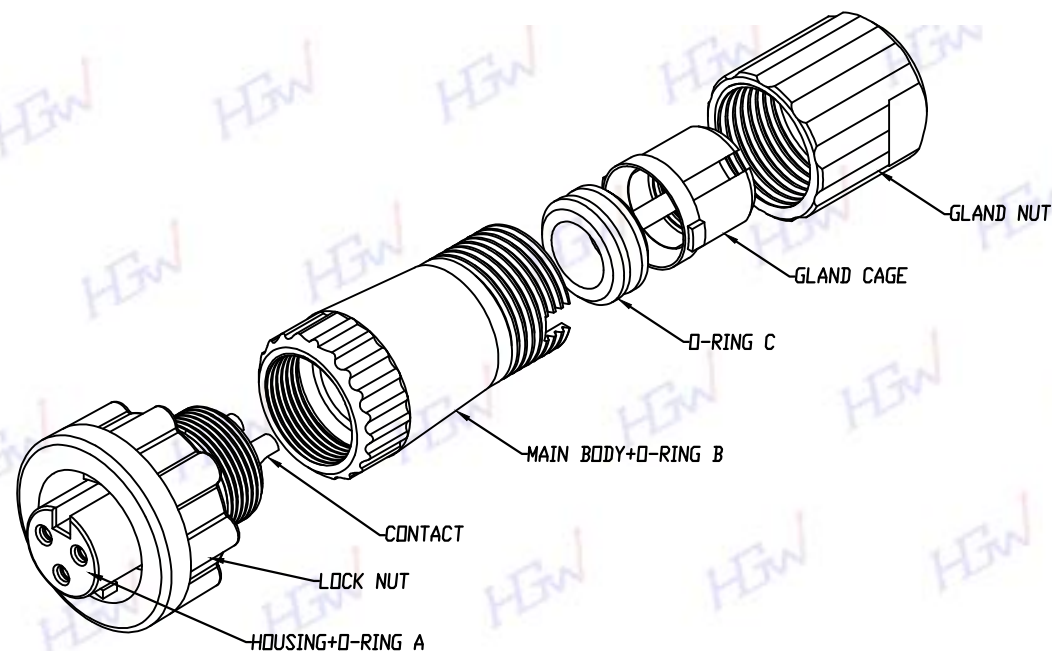

禾剛企業有限公司  
HOU GUN ENTERPRISE CO., LTD.

| REV | DESCRIPTION | DATE   |
|-----|-------------|--------|
| A   |             | 190128 |

客戶圖面確認簽回章

TITLE A SIZE F CON F PIN  
(LOCK BAYONET)  
ASSEMBLY TYPE-5A

P/N: SEE TABLE A

DWG. NO: QC8940

DR. Dan  UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny UNLESS OTHERWISE SPECIFIED TOLERANCES:

|      |       |           |            |
|------|-------|-----------|------------|
| REV. | SHEET | X ± 0.1   | XXX ± 0.03 |
| A    | 1/1   | XX ± 0.05 | ANGLE ± 1° |