



TABLE A

 2 PIN	 3 PIN
HGM1-AS02P-01-11	HGM1-AS03P-01-11

PIN ASSIGMENTS
FRONT VIEW

1. MATERIAL

- 1-1.HOUSING: PA66
 1-2.CONTACT: BRASS
 1-3.GASKET: SILICON
 1-4.HEX NUT: PA66

2.FINISH





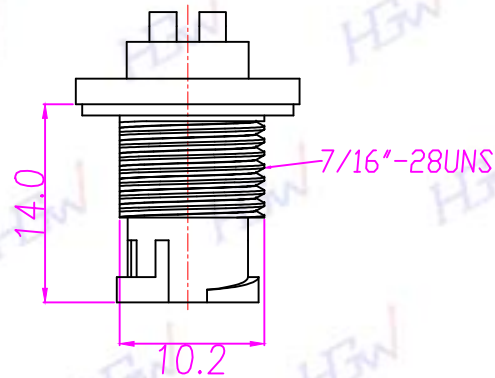
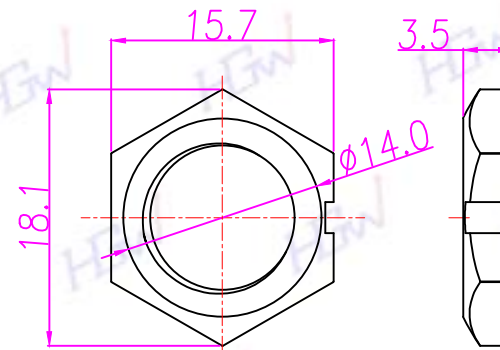
- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 5A
 3-2.RATED VOLTAGE: 250V
 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: $-40^{\circ}\text{C}\sim 105^{\circ}\text{C}$

RECOMMENDED
PANEL
CUT-OUT

HEX NUT



禾剛企業有限公司
 HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		180716

客戶圖面確認簽回章

TITLE A SIZE M CON M PIN
 FRONT FASTENED(LOCK BAYONET)
 SOLDER TYPE 5A

P/N: SEE TABLE A

DWG. NO: QC8922

DR. Dan  UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny
 REV. A SHEET 1/1
 UNLESS OTHERWISE SPECIFIED TOLERANCES:
 X ± 0.20 XXX ± 0.05
 XX ± 0.10 ANGLE $\pm 1^{\circ}$