




HGF10-BS02P-CB




HGF10-BS03P-CB




HGF10-BS04P-CB




HGF05-BS02P-CB



HGF05-BS03P-CB




HGF05-BS04P-CB




HGF05-BS05P-CB



HGF05-BS06P-CB




HGF05-BS07P-CB




HGF05-BS08P-CB



HGF02-BS10P-CB



HGF02-BS12P-CB

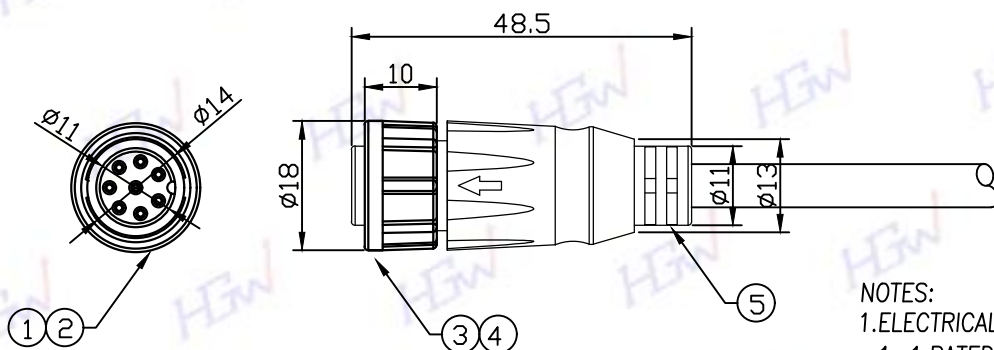

NOTES:

1.ELECTRICAL SPECIFICATION

1-1.RATED CURRENT: 10/5/2 A

1-2.RATED VOLTAGE: 250V

1-3.WATERPROOF: IP67

2.ENVIRONMENTAL

2-1.OPERATION TEMPERATURE: -20°~80°C

3.PART NUMBER SPECIFICATION

3-1.HGFxx-BSxxP-CB

1.CONNECTOR: B SIZE FEMALE CONNECTOR ,for1

2.CONTACT: BRASS,FEMALE PIN,GOLD FLASH ,forN

3.LOCK NUT: PA66 ,for1

4.O-RING: EPDM ,for1

5.MOLDING: PVC ,for1

02 - 02 PINS 07 - 07 PINS

03 - 03 PINS 08 - 08 PINS

04 - 04 PINS 10 - 10 PINS

05 - 05 PINS 12 - 12 PINS

06 - 06 PINS

10-CURRENT RATING 10A

05-CURRENT RATING 5A

02-CURRENT RATING 2A

禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		220106


客戶簽名確認章

TITLE
CIRCULAR B SIZE LOCK TYPE
FEMALE CABLE

P/N:

DWG. NO: HGFxx-BSxxP-CB

DR. Dan



UNIT:mm

CH. Jason

SCALE

1:1

AP. Lanny

UNLESS OTHERWISE
SPECIFIED TOLERANCES:REV.
ASHEET
1/1X ±0.20 XXX ±0.05
XX ±0.10 ANGLE ±1°