

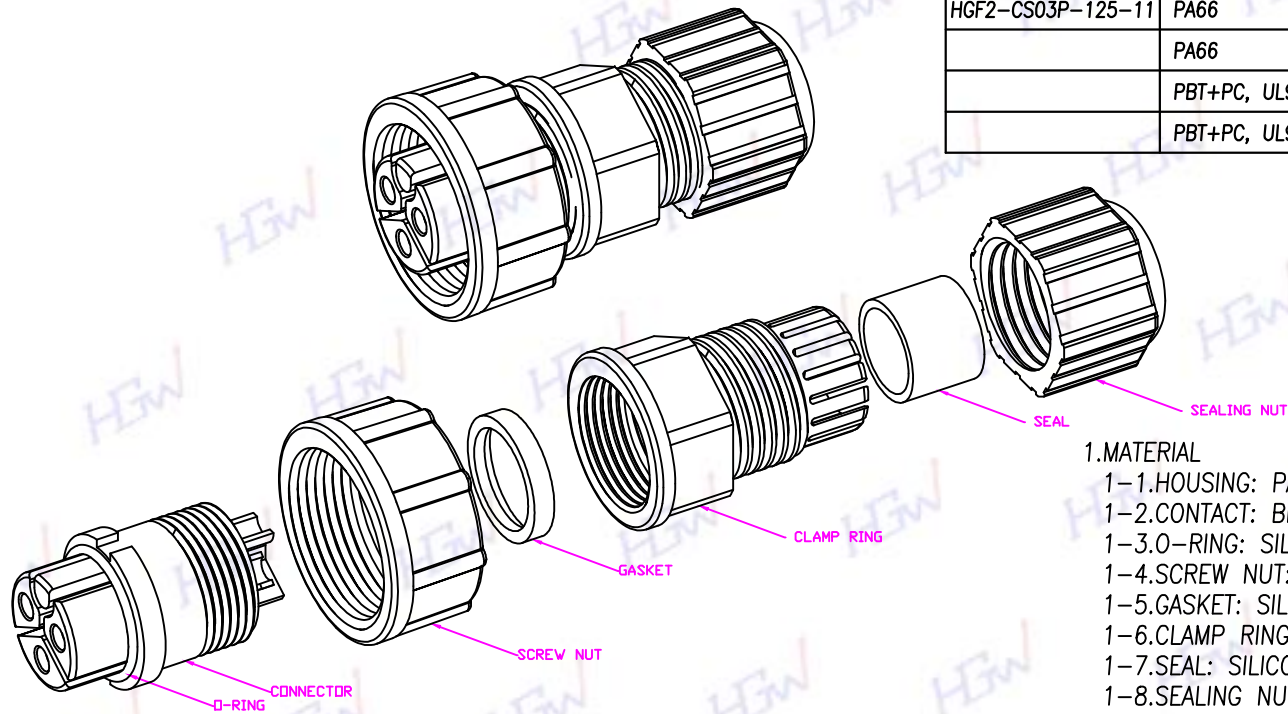


TABLE A

P/N	MATERIAL(CLAMP RING)	CABLE OD
HGF2-CS03P-125-11	PA66	Ø8.6mm~Ø9.6mm
	PA66	Ø6.5mm~Ø7.6mm
	PBT+PC, UL94V-0(F1)	Ø8.6mm~Ø9.6mm
	PBT+PC, UL94V-0(F1)	Ø6.5mm~Ø7.6mm

1.MATERIAL

- 1-1.HOUSING: PA66
- 1-2.CONTACT: BRASS
- 1-3.O-RING: SILICONE
- 1-4.SCREW NUT: PA66
- 1-5.GASKET: SILICONE
- 1-6.CLAMP RING: SEE TABLE A
- 1-7.SEAL: SILICONE
- 1-8.SEALING NUT: PA66

2.FINISH


- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION



- 3-1.RATED CURRENT: 20A
- 3-2.RATED VOLTAGE: 250V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C



Pin Assignments
Front View

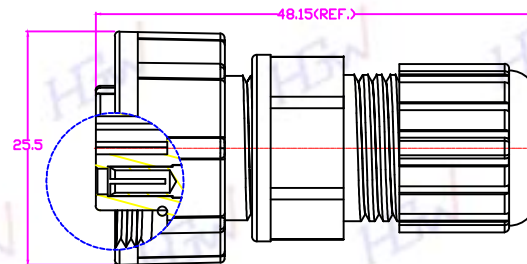

禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		180603

客戶圖面確認簽回章

TITLE
C SIZE-3P(F)全身組裝式

P/N: SEE TABLE A

DWG. NO: QC9140

DR. Dan  UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny
UNLESS OTHERWISE SPECIFIED TOLERANCES:
REV. A SHEET 1/1
X ± 0.20 XXX ± 0.05
XX ± 0.10 ANGLE ± 1°