




 2PIN	 3PIN	 4PIN
HGF3-M802P-02-11 HGF3-M802P-03-11	HGF3-M803P-02-11 HGF3-M803P-03-11	HGF3-M804P-07-11 HGF3-M804P-08-11

HGF3-M804P-07-11	GOLD FLASH
HGF3-M803P-02-11	GOLD FLASH
HGF3-M802P-02-11	GOLD FLASH
HGF3-M804P-08-11	GOLD 10u"
HGF3-M803P-03-11	GOLD 10u"
HGF3-M802P-03-11	GOLD 10u"
PART No.	FINISH

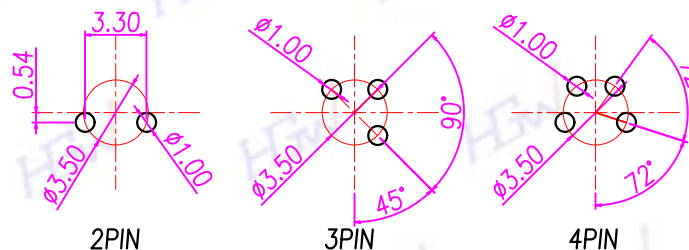

REV	DESCRIPTION	DATE
A		190425

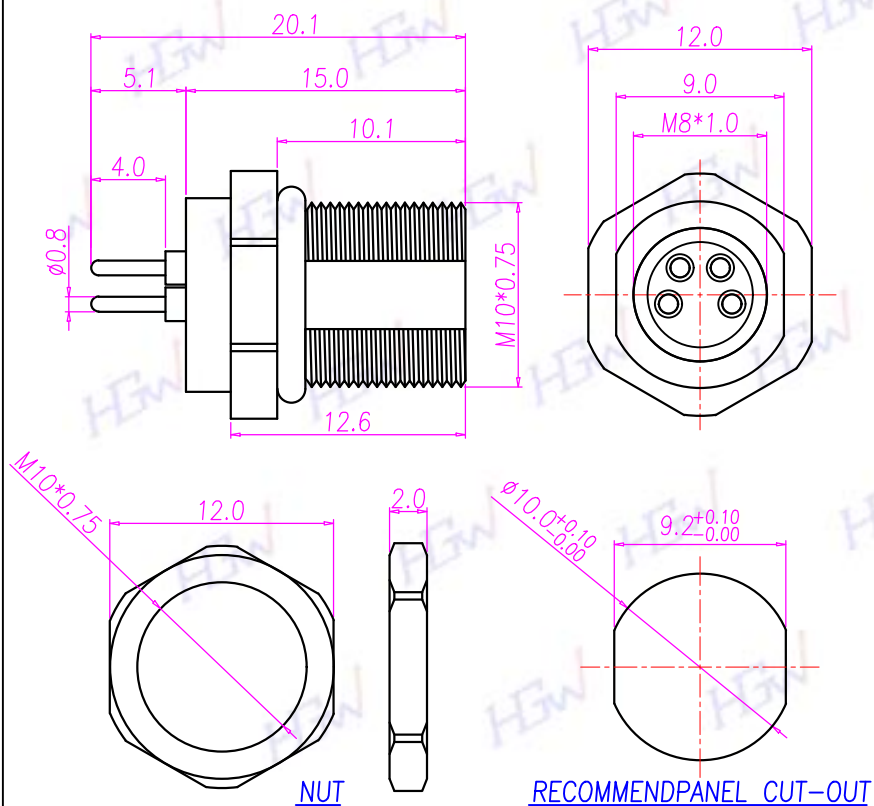

RECOMMEND PCB LAYOUT

1-1.HOUSING: PA66 ; COLOR: BLACK
1-2.CONTACT: BRASS
1-3.SHELL: BRASS
1-4.NUT: BRASS
1-5.O-RING: EPDM ; COLOR: BLACK

2-1.CONTACT: SEE TABLE A
2-2.SHELL: NICKEL PLATED
2-3.NUT: NICKEL PLATED

3-1.RATED CURRENT: 4A
3-2.RATED VOLTAGE: 60V
3-3.WATERPROOF: IP67

4-1. OPERATION TEMPERATURE: $-40^{\circ}\text{C}\sim 105^{\circ}\text{C}$

M8(F)前鎖M10*0.75插板式

P/N:	SEE TABLE A
------	-------------

DWG. NO:	QC9308
----------	--------

DR. Dan		UNIT:mm
---------	---	---------

CH. Jason	SCALE	1:1
-----------	-------	-----

AP. Lanny		UNLESS OTHERWISE SPECIFIED TOLERANCES:	
REV. A	SHEET 1/1	X ± 0.20	XXX ± 0.05
		XX ± 0.10	ANGLE $\pm 1^\circ$