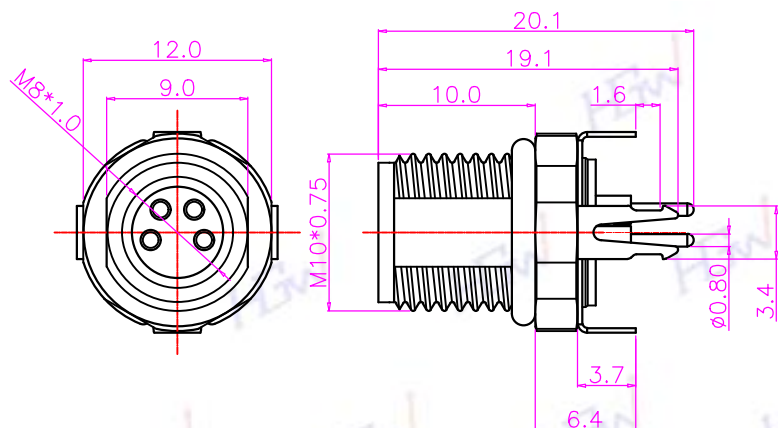
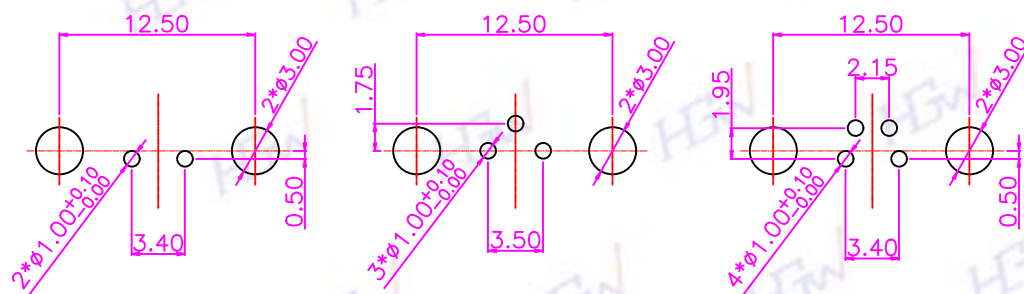







NUT

RECOMMEND PANEL CUT-OUT



RECOMMEND P.C.B LAYOUT

TABLE A

		
2PIN	3PIN	4PIN
HGF3-M802P-09-11	HGF3-M803P-09-11	HGF3-M804P-26-11

PIN ASSIGNMENTS
FRONT VIEW

1.MATERIAL

- 1-1.HOUSING: PA66 UL94V-0 ; COLOR: BLACK
- 1-2.CONTACT: BRASS
- 1-3.SHELL: BRASS
- 1-4.O-RING: NBR ; COLOR: BLACK
- 1-5.NUT: BRASS
- 1-6.GROUND: PHOSPHOR BRONZE

2.FINISH

- 2-1.CONTACT: GOLD FLASH PLATED
UNDER PLATE: NICKEL
- 2-2.NUT: NICKEL PLATED
- 2-3.SHELL: NICKEL PLATED
- 2-4.GROUND: NICKEL PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 4A
- 3-2.RATED VOLTAGE: 60V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~85°C



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		230816

客戶圖面確認簽回章

TITLE
M8(F)前鎖板端插板式(M10*0.75)(帶接地)

P/N: SEE TABLE A

DWG. NO: QC10772

DR. Dan  UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny
UNLESS OTHERWISE SPECIFIED TOLERANCES:
REV. A SHEET 1/1
X ± 0.20 XXX ± 0.05
XX ± 0.10 ANGLE $\pm 1^\circ$