







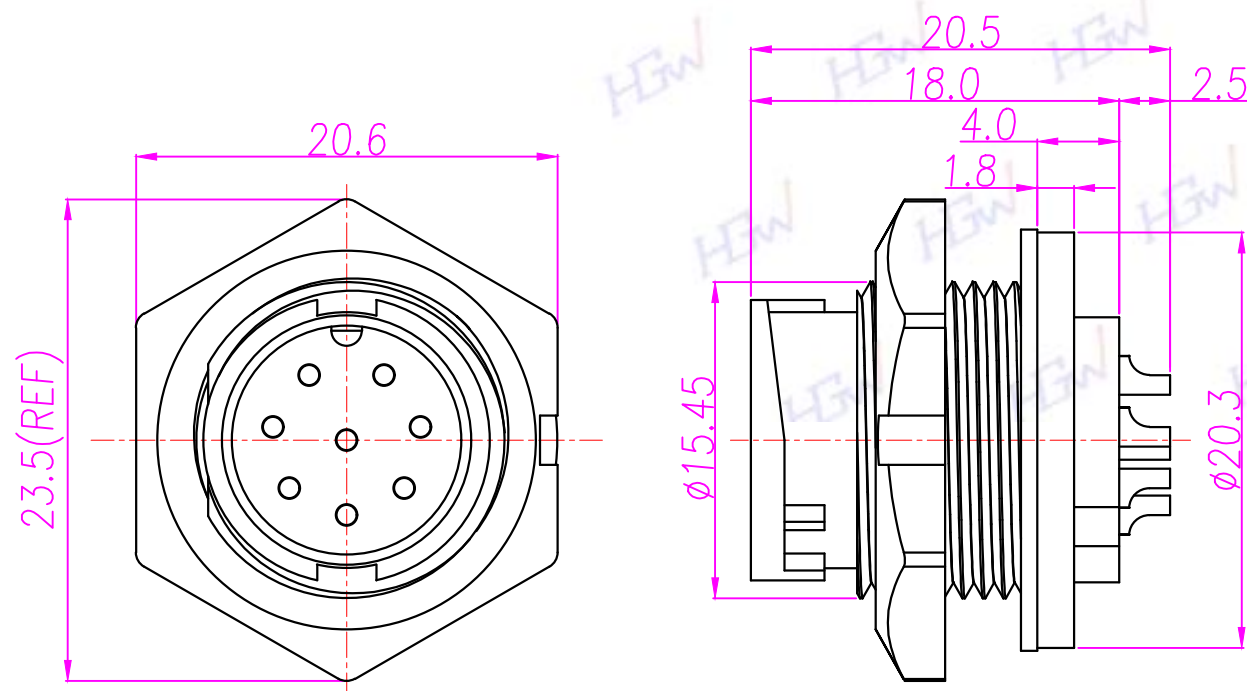
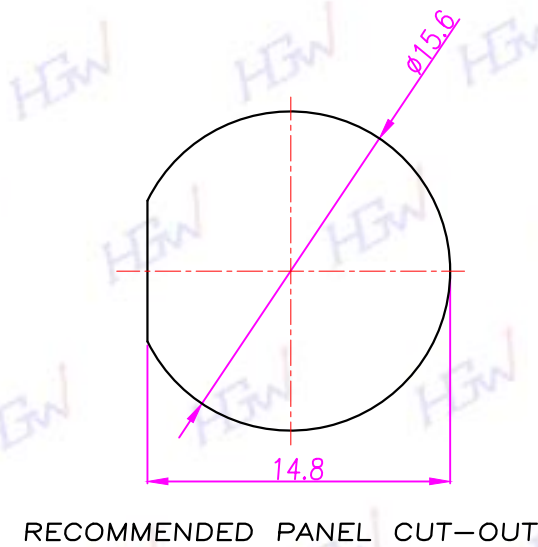


TABLE A

						
2 PIN	3 PIN	4 PIN	5 PIN	6 PIN	7 PIN	8 PIN
HGM2-BS02P-52-11	HGM2-BS03P-87-11	HGM2-BS04P-157-11	HGM2-BS05P-125-11	HGM2-BS06P-62-11	HGM2-BS07P-11-11	HGM2-BS08P-74-11

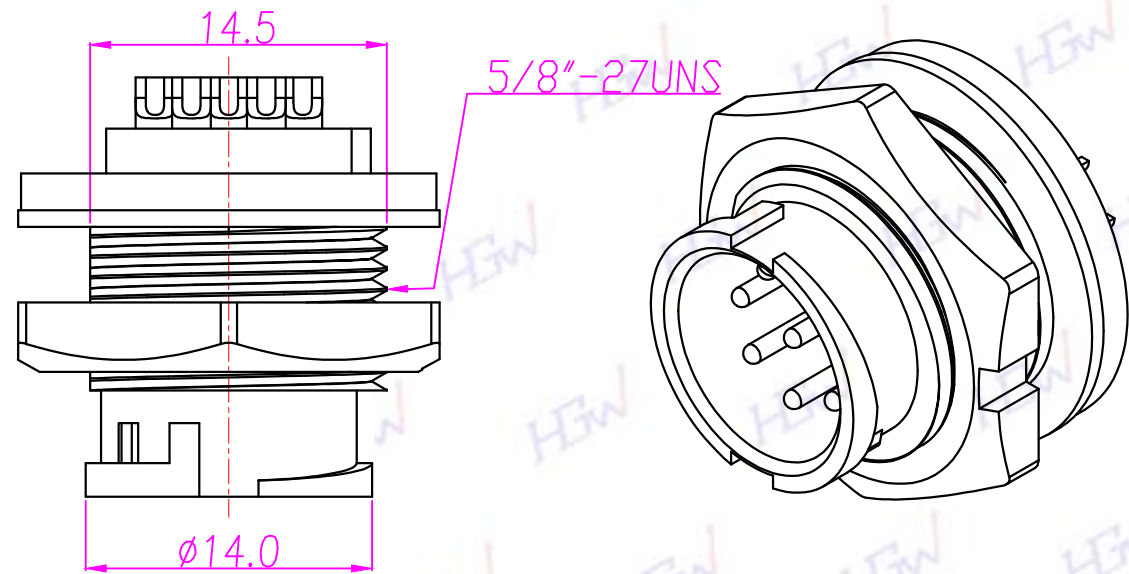

1.MATERIAL

- 1-1.HOUSING: PA66
- 1-2.CONTACT: BRASS
- 1-3.GASKET: SILICONE
- 1-4.HEX NUT: PA66

2.FINISH

- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 5A
- 3-2.RATED VOLTAGE: 250V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.


REV	DESCRIPTION	DATE
A		180603

客戶圖面確認簽回章

TITLE
B SIZE(M)半牙前鎖線式

P/N: SEE TABLE A

DWG. NO: QC8429

DR. Dan  UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny UNLESS OTHERWISE SPECIFIED TOLERANCES:

REV.	SHEET	X ± 0.1 XXX ± 0.03
A	1/1	XX ± 0.05 ANGLE ± 1°