



TABLE A

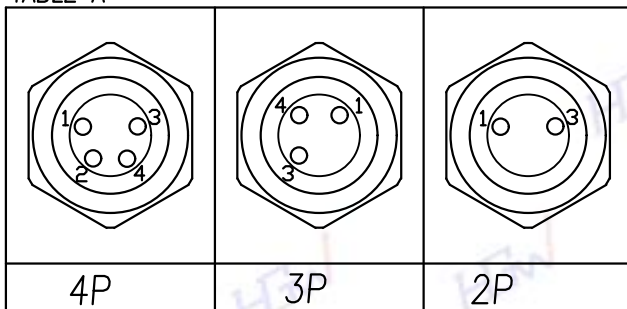

HGF2-M804P-135-11	GOLD 10u"
HGF2-M804P-102	GOLD FALSH
HGF2-M803P-63-11	GOLD 10u"
HGF2-M803P-35	GOLD FALSH
HGF2-M802P-39-11	GOLD 10u"
HGF2-M802P-22	GOLD FALSH
P/N	FINISH

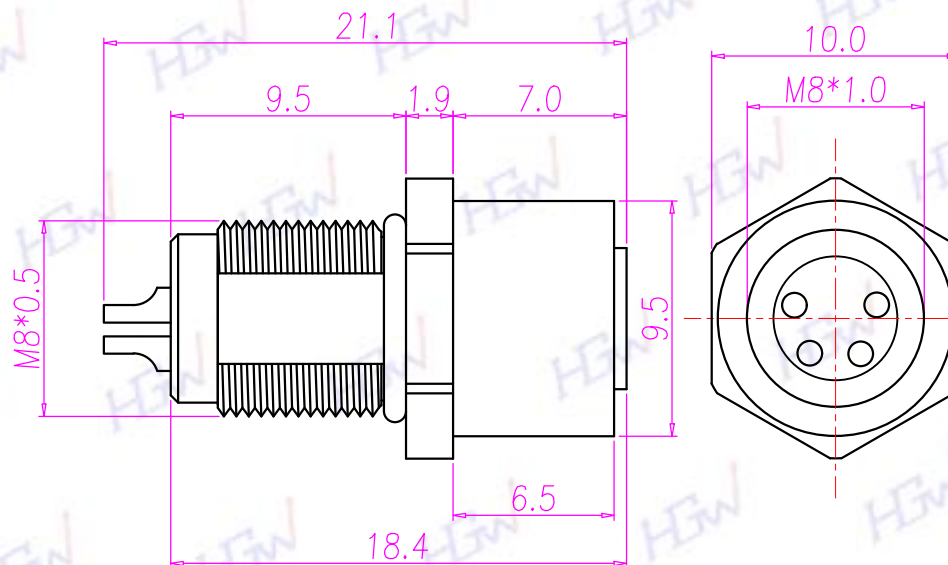

NOTE:

1. MATERIAL :

- 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS.
- 1-3. SHELL : BRASS.
- 1-4. NUT : BRASS.
- 1-5. O-RING : EPDM ; COLOR : BLACK
- 1-6. Epoxy Base : EF400A&EF400B ; COLOR : BLACK

2. FINISH :


- 2-1. CONTACT : SEE TABLE A
- 2-2. SHELL : NICKEL PLATED.
- 2-3. NUT : NICKEL PLATED.

3. ELECTRICAL SPECIFICATION :

- 3-1. Rated current : 4A
- 3-2. Rated Voltage : 60V
- 3-3. Water proof : IP67

4. Environmental :

- 4-1. Operation Temperature : -20℃~85℃

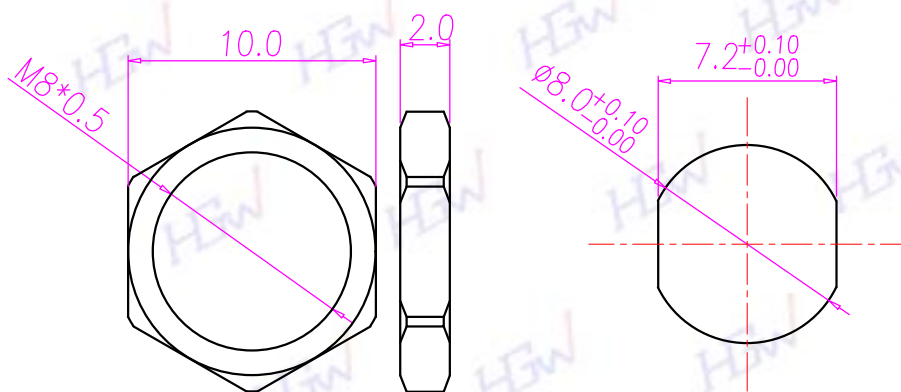

NUT

RECOMMENDED CUT-OUT



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		130110

客戶圖面確認簽回章

TITLE

M8母後鎖板端焊線式

P/N: SEE TABLE A

DWG. NO: QC6054

DR. Dan UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny UNLESS OTHERWISE SPECIFIED TOLERANCES:

REV.	SHEET	X ± 0.1	XXX ± 0.03
A	1/1	XX ± 0.05	ANGLE ± 1°