
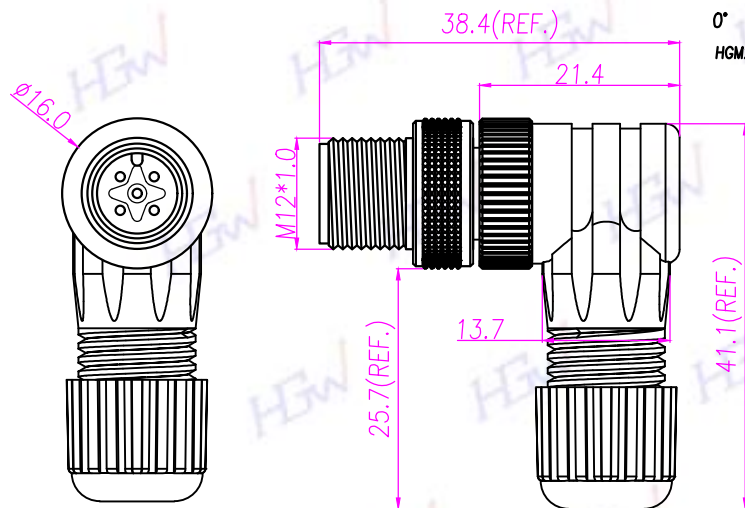


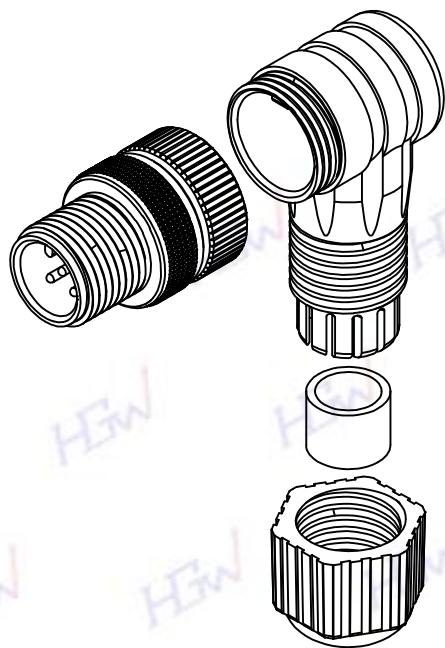

RECOMMEND CABLE OD=5.0mm~6.8mm

TABLE A

0° HGM2-M1205P-161-11	5PIN	45° HGM2-M1205P-162-11	90° HGM2-M1205P-163-11	135° HGM2-M1205P-164-11	180° HGM2-M1205P-165-11
0° HGM2-M1204P-210-11	4PIN	45° HGM2-M1204P-211-11	90° HGM2-M1204P-212-11	135° HGM2-M1204P-213-11	180° HGM2-M1204P-214-11
0° HGM2-M1203P-120-11	3PIN	45° HGM2-M1203P-121-11	90° HGM2-M1203P-122-11	135° HGM2-M1203P-123-11	180° HGM2-M1203P-124-11
0° HGM2-M1202P-70-11	2PIN	45° HGM2-M1202P-71-11	90° HGM2-M1202P-72-11	135° HGM2-M1202P-73-11	180° HGM2-M1202P-74-11

1.MATERIAL

- 1-1.HOUSING: PA66 ; COLOR: BLACK
- 1-2.CONTACT: BRASS
- 1-3.SHELL: BRASS
- 1-4.NUT: BRASS
- 1-5.O-RING: SILICONE
- 1-6.CLAMP RING: PA66
- 1-7.SEAL: SILICONE
- 1-8.SEALING NUT: PA66

2.FINISH

- 2-1.CONTACT: GOLD 10u" MICRO INCHES MIN.
- 2-2.NUT: NICKEL PLATED
- 2-3.SHELL: NICKEL PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 4A
- 3-2.RATED VOLTAGE: 2~4PIN 250V ; 5PIN 60V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		190313

客戶圖面確認簽回章

TITLE
M12(M)A CODE90度組裝式(塑膠本體)

P/N: SEE TABLE A

DWG. NO: QC9681

DR. Dan  UNIT: mm

CH. Jason SCALE 1:1

AP. Lanny
UNLESS OTHERWISE SPECIFIED TOLERANCES:
REV. A SHEET 1/1
X ± 0.25, XXX ± 0.05
XX ± 0.15, ANGLE ± 1°