

TABLE A


HGF2-M1205P-73 HGF2-M1205P-108-11	HGF2-M1204P-62 HGF2-M1204P-151-11	HGF2-M1203P-53-11 HGF2-M1203P-71-11	HGF2-M1203P-56-11 HGF2-M1203P-74-11	HGF2-M1202P-52-11 HGF2-M1202P-53-11

HGF2-M1202P-52-11	GOLD 10u"	HGF2-M1202P-53-11	GOLD FLASH
HGF2-M1203P-71-11	GOLD 10u"	HGF2-M1203P-56-11	GOLD FLASH
HGF2-M1203P-74-11	GOLD 10u"	HGF2-M1203P-53-11	GOLD FLASH
HGF2-M1204P-151-11	GOLD 10u"	HGF2-M1204P-62	GOLD FLASH
HGF2-M1205P-108-11	GOLD 10u"	HGF2-M1205P-73	GOLD FLASH
PART NO	FINISH	PART NO	FINISH



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		200316

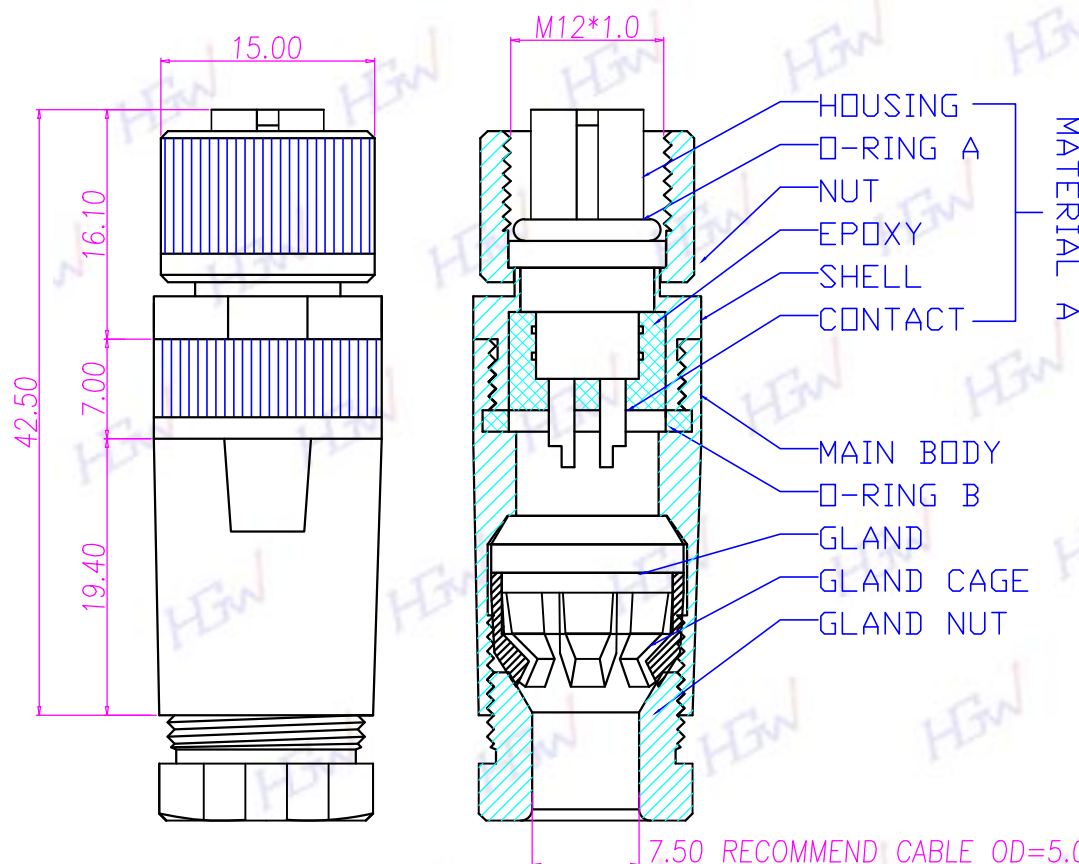

1.MATERIAL

1-1.MATERIAL A:

- a.HOUSING: PBT UL94V-0 ; COLOR: BLACK
- b.CONTACT: BRASS
- c.NUT: ALUMINIUM ALLOY
- d.SHELL: ALUMINIUM ALLOY
- e.O-RING A: EPDM ; COLOR: BLACK

1-2.MAIN BODY: ALUMINIUM ALLOY

1-3.GLAND: SILICONE ;
COLOR: BLACK

1-4.GLAND CAGE: POM ; COLOR: WHITE

1-5.GLAND NUT: ALUMINIUM ALLOY

1-6.O-RING B: SILICONE ; COLOR: BLACK

2.FINISH

2-1.MATERIAL A:

- a.CONTACT: SEE TABLE A
- b.NUT: SATIN NICKEL PLATED
- c.SHELL: SATIN NICKEL PLATED

2-2.MAIN BODY: SATIN NICKEL PLATED

2-3.GLAND NUT: SATIN NICKEL PLATED

3.ELECTRICAL SPECIFICATION

3-1.RATED CURRENT: 4A

3-2.RATED VOLTAGE: 2~4PIN 250V ; 5PIN 60V

3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

4-1.OPERATION TEMPERATURE: -20°C~85°C

客戶簽名確認章

TITLE
M12(F)金屬組裝式

P/N: SEE TABLE A

DWG. NO: QC5210

DR. Dan UNIT: mm

CH. Jason SCALE 1:1

AP. Lanny UNLESS OTHERWISE SPECIFIED TOLERANCES:

REV. A SHEET 1/1
X ± 0.20 XXX ± 0.05
XX ± 0.10 ANGLE $\pm 1^\circ$