
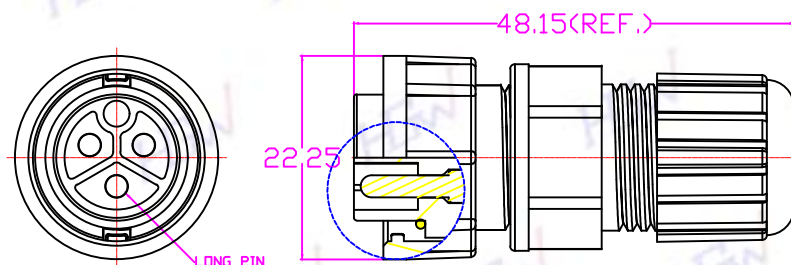


TABLE A

P/N	MATERIAL(CLAMP RING)	CABLE OD
HGM2-CS03P-95-11	PA66	ø8.6mm~ø9.6mm
		ø6.5mm~ø7.6mm
HGM2-CS03P-98-11	PBT+PC, UL94V-0(F1)	ø8.6mm~ø9.6mm
		ø6.5mm~ø7.6mm

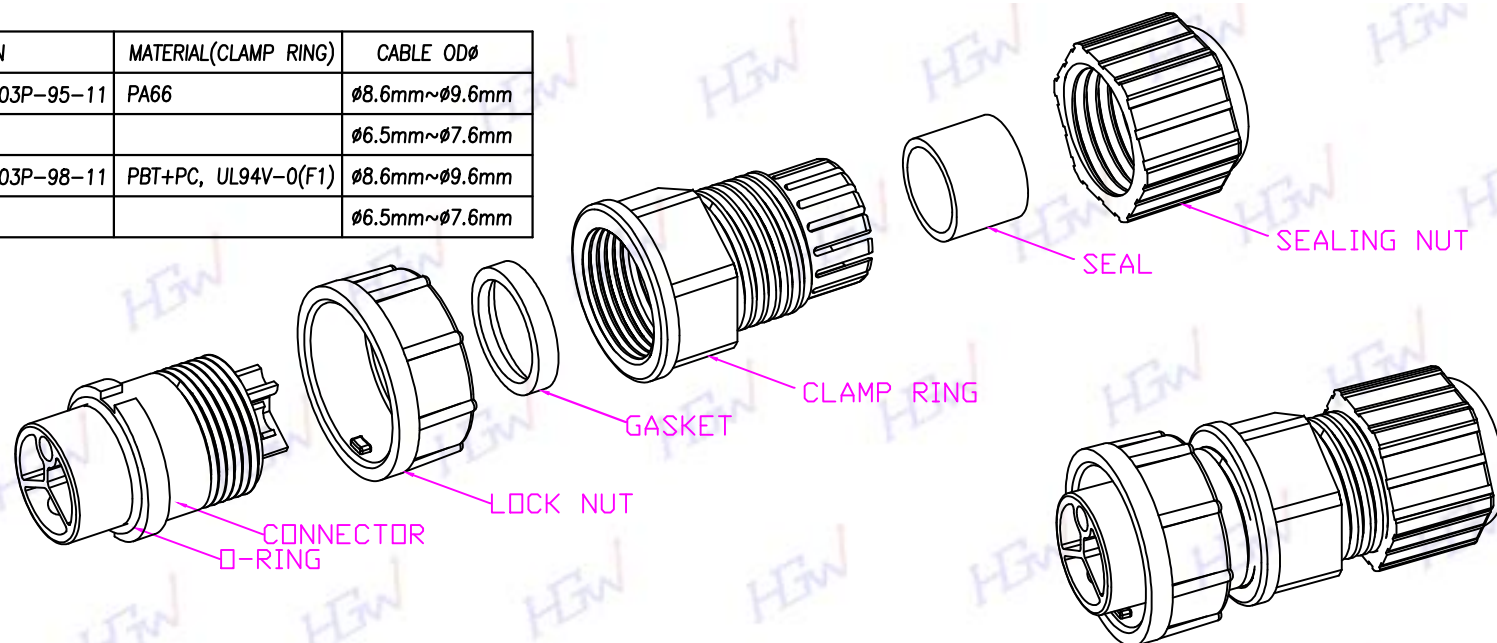

1.MATERIAL

- 1-1.HOUSING: PA66
- 1-2.CONTACT: BRASS
- 1-3.O-RING: SILICONE
- 1-4.LOCK NUT: PA66
- 1-5.GASKET: SILICONE
- 1-6.CLAMP RING: SEE TABLE A
- 1-7.SEAL: SILICONE
- 1-8.SEALING NUT: PA66

2.FINISH

- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 20A
- 3-2.RATED VOLTAGE: 250V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		180402

客戶圖面確認簽回章

TITLE C SIZE(F CONN/M PIN)
LOCK TYPE ASSEMBLY

P/N: SEE TABLE A

DWG. NO: QC8633

DR. Dan  UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny
UNLESS OTHERWISE SPECIFIED TOLERANCES:
REV. A SHEET 1/1
X ± 0.20 XXX ± 0.05
XX ± 0.10 ANGLE ± 1°