






TABLE A

	
10 PIN	12 PIN
HGM2-BS10P-14-11	HGM2-BS12P-17-11

PIN ASSIGNMENTS
FRONT VIEW

RECOMMENDED PANEL CUT-OUT

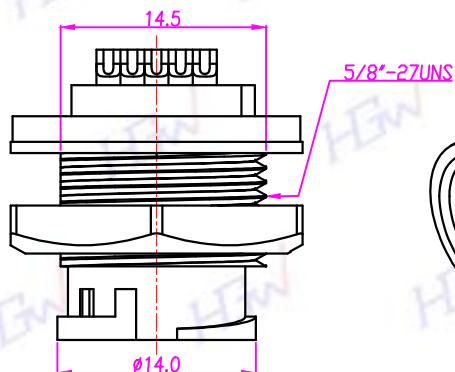

1.MATERIAL

- 1-1.HOUSING: PA66
- 1-2.CONTACT: BRASS
- 1-3.GASKET: SILICONE
- 1-4.HEX NUT: PA66

2.FINISH


- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 2A
- 3-2.RATED VOLTAGE: 250V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: $-40^{\circ}\text{C}\sim 105^{\circ}\text{C}$

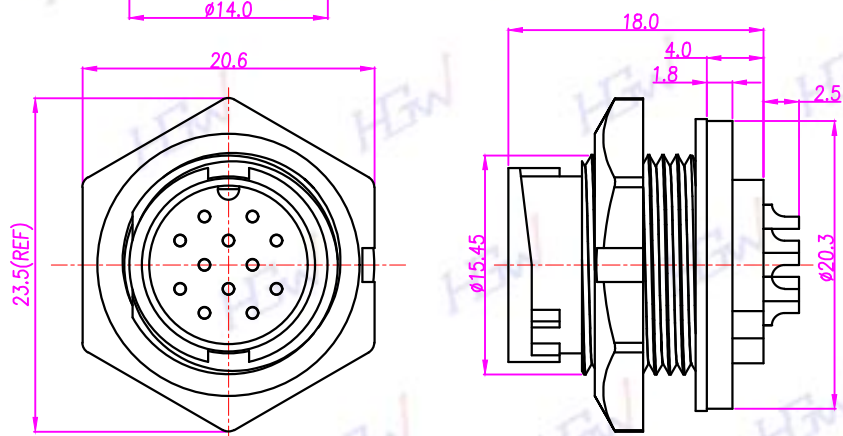


禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		180625

客戶圖面確認簽回章

TITLE
B SIZE(M)前鎖板端焊線式

P/N: SEE TABLE A

DWG. NO: QC8430

DR. Dan  UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny
UNLESS OTHERWISE SPECIFIED TOLERANCES:
X ± 0.20 XXX ± 0.05
XX ± 0.10 ANGLE $\pm 1^{\circ}$

REV. A SHEET 1/1