
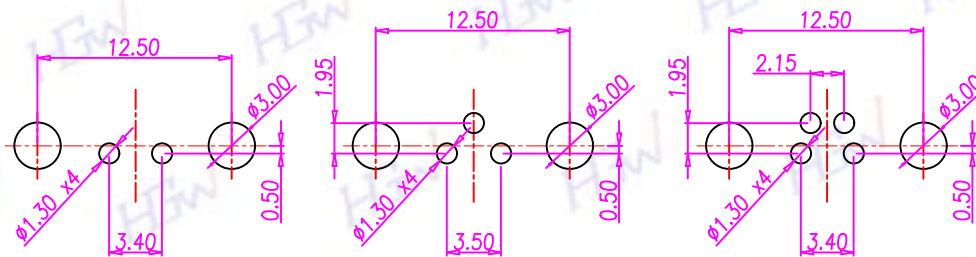
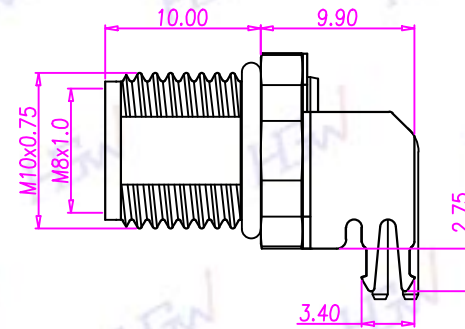
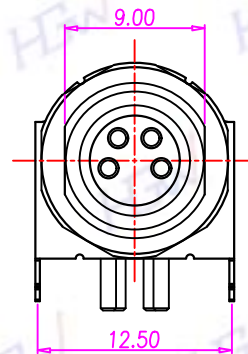


TABLE A


HGF3-M802P-01-11	HGF3-M803P-01-11	HGF3-M804P-02-11

PIN ASSIGNMENTS
FRONT VIEW

P.C.B. LAYOUT

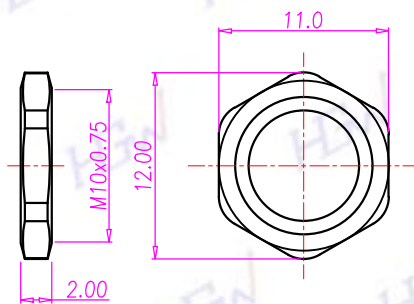

NUT



RECOMMEND PANEL CUT-OUT

1.MATERIAL

- 1-1.HOUSING: PA66 UL94V-0 ; COLOR: BLACK
- 1-2.CONTACT: BRASS
- 1-3.NUT: BRASS
- 1-4.SHELL: BRASS
- 1-5.O-RING: NBR
- 1-6.GROUND: PHOSPHOR BRONZE

2.FINISH

- 2-1.CONTACT: 10 MICRO INCHES MIN. GOLD PLATED
UNDER PLATE: NICKEL
- 2-2.NUT: NICKEL PLATED
- 2-3.SHELL: NICKEL PLATED
- 2-4.GROUND: BRIGHT TIN PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 4A
- 3-2.RATED VOLTAGE: 60V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -20°C~85°C



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		180607

客戶圖面確認簽回章

TITLE

M8(F)前鎖90度DIP+接地

P/N: SEE TABLE A

DWG. NO: QC8253

DR. Dan UNIT: mm

CH. Jason SCALE 1:1

AP. Lanny		UNLESS OTHERWISE SPECIFIED TOLERANCES:	
REV.	SHEET	X	± 0.20 XXX ± 0.05
A	1/1	XX	± 0.10 ANGLE ± 1°