

CONNECTOR:

1.MATERIAL

- 1-1.HOUSING: PBT UL94V-0 ; COLOR: YELLOW
- 1-2.CONTACT: BRASS
- 1-3.SPRING: PHOSPHOR BRONZE
- 1-4.NUT: BRASS
- 1-5.EPOXY BASE: EF400A&EF400B. COLOR: BLACK
- 1-6.O-RING: EPDM ; COLOR: BLACK

2.FINISH


- 2-1.CONTACT: 30 MICRO INCHES MIN. GOLD PLATED
UNDER PLATE: NICKEL
- 2-2.SPRING: MATTE TIN PLATED
- 2-3.NUT: NICKEL PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 20A
- 3-2.RATED VOLTAGE: 125V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~85°C

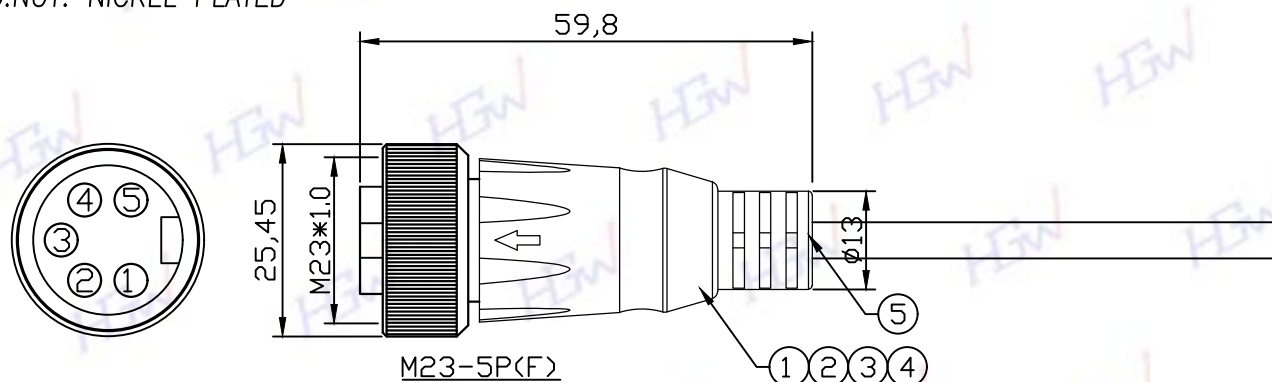

NOTE:

- 1.CONNECTOR: M23-5P Female Connector,BLACK ,for1,HGF2-M2305P-39
- 2.CONTACT: Brass,Female Pin,Gold Flash ,for5
- 3.RING-NUT: Brass,Nickel Plated,BLACK ,for1
- 4.O-RING: EPDM ,for1
- 5.MOLDING: PVC ,for1



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		210716

客戶圖面確認簽回章

TITLE M23 FEMALE & MOLDED
CABLE ASSY

P/N:

DWG. NO: HGF20-M2305P-CB

DR. Dan  UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny UNLESS OTHERWISE
SPECIFIED TOLERANCES:

REV.	SHEET	
A	1/1	X ± 0.1 XXX ± 0.03 XX ± 0.05 ANGLE ± 1°