


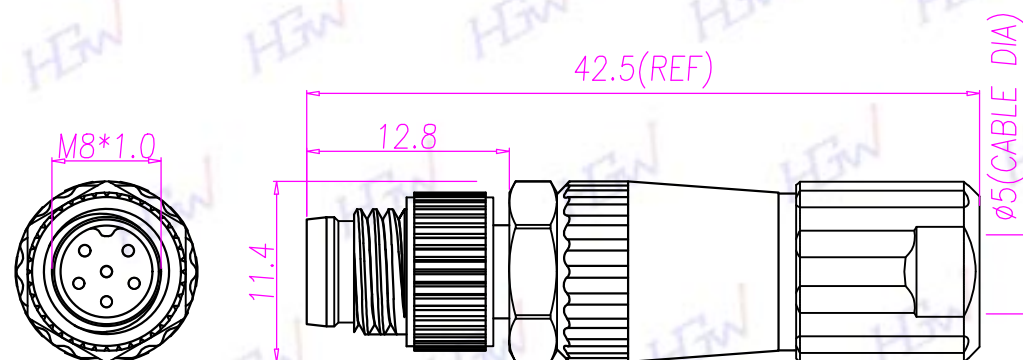


TABLE A

	
HGM2-M806P-75-11	HGM2-M805P-167-11

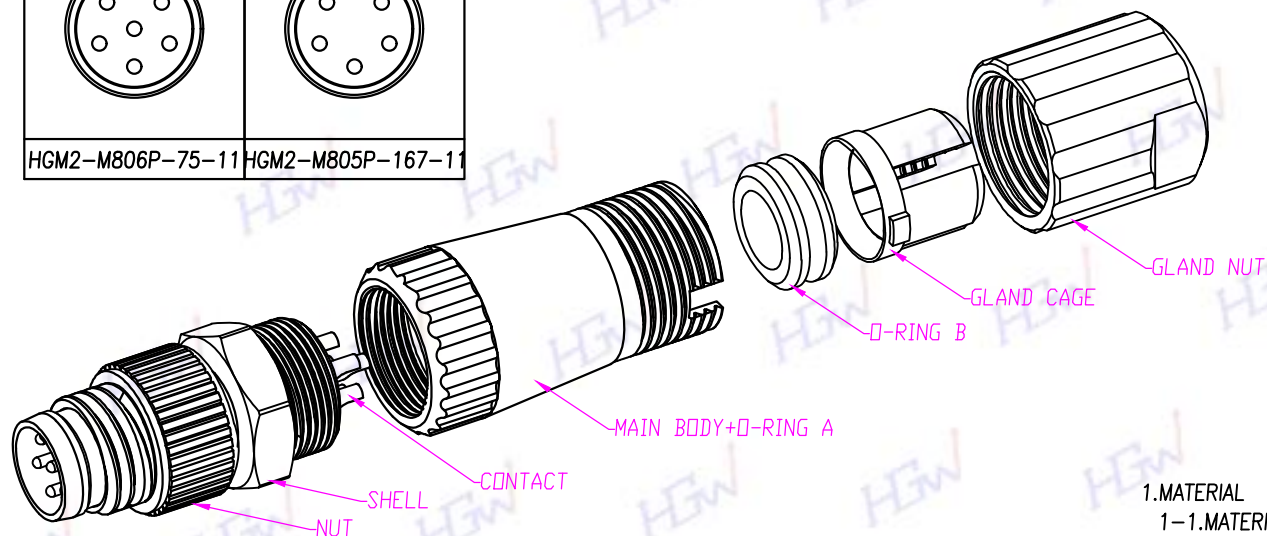

1.MATERIAL

1-1.MATERIAL A

- a.HOUSING: PA66 UL94V-0 ; COLOR: BLACK
- b.CONTACT: BRASS
- c.NUT: BRASS
- d.SHELL: BRASS

1-2.MATERIAL B

- a.MAIN BODY: PA66 ; COLOR: BLACK
- b.O-RING A: SILICONE ; COLOR: BLACK
- 1-3.O-RING B: NBR ; COLOR: BLACK
- 1-4.GLAND CAGE: PA66 ; COLOR: WHITE
- 1-5.GLAND NUT: PA66 ; COLOR: BLACK

2.FINISH

2-1.MATERIAL A

- a.CONTACT: GOLD FLASH PLATED
- UNDER PLATE: NICKEL
- b.NUT: NICKEL PLATED
- c.SHELL NICKEL PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 2A
- 3-2.RATED VOLTAGE: 30V
- 3-3.WATERPROOF: IPx7

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -20°C~85°C



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		190403

客戶圖面確認簽回章

TITLE

M8(M)K CODE 螺絲母式

P/N: SEE TABLE A

DWG. NO: QC9747

DR. Dan  UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny UNLESS OTHERWISE SPECIFIED TOLERANCES:

REV.	SHEET	X ± 0.1	XXX ± 0.03
A	1/1	XX ± 0.05	ANGLE ± 1°