




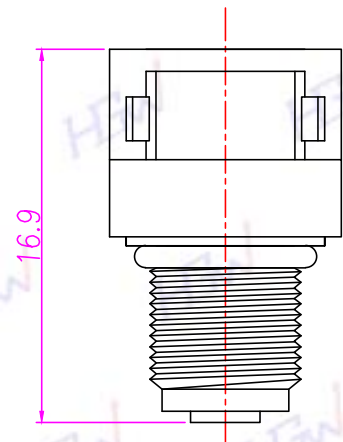




TABLE A



HGF2-M504P-147-11	SATIN NICKEL 80u"~100u"	GOLD 10u"
HGF2-M503P-68-11	SATIN NICKEL 80u"~100u"	GOLD 10u"
HGF2-M502P-44-11	SATIN NICKEL 80u"~100u"	GOLD 10u"
HGF2-M504P-63	SATIN NICKEL 80u"~100u"	GOLD FLASH
HGF2-M503P-51-11	SATIN NICKEL 80u"~100u"	GOLD FLASH
HGF2-M502P-34-11	SATIN NICKEL 80u"~100u"	GOLD FLASH
HGF2-M504P-119-11	BLACK Cr	GOLD FLASH
PART NO.	NUT	FINISH



PANEL CUT-OUT

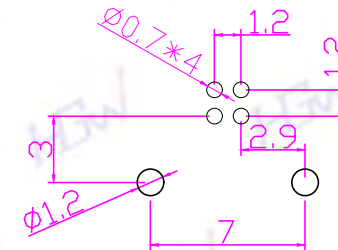

P.C.B LAYOUT

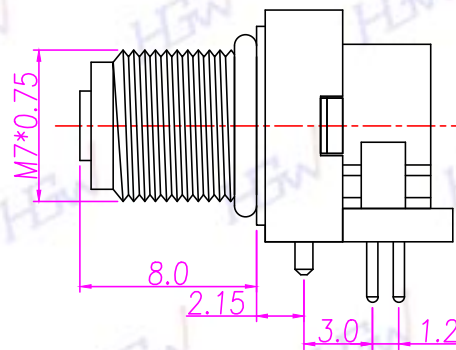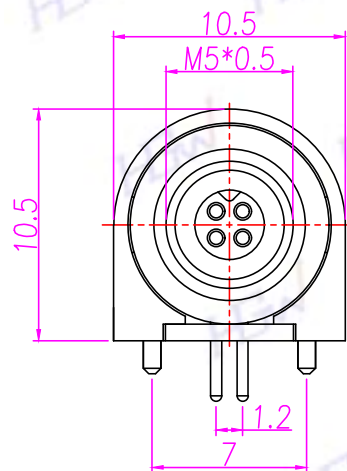

1.MATERIAL

- 1-1.HOUSING: PBT UL94V-0 ; COLOR: BLACK
- 1-2.CONTACT: BRASS
- 1-3.NUT: BRASS
- 1-4.SHELL: BRASS
- 1-5.O-RING: NBR ; COLOR: BLACK
- 1-6.BACK HOUSING: PBT UL94V-0 ; COLOR: BLACK
- 1-7.DOWN HOUSING: PBT UL94V-0 ; COLOR: BLACK

2.FINISH

- 2-1.CONTACT: SEE TABLE A
- 2-2.NUT: SEE TABLE A
- 2-3.SHELL: SATIN NICKEL PLATED

3.ENVIRONMENTAL

- 3-1.RATED CURRENT: 1A
- 3-2.RATED VOLTAGE: 60V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -20°C~85°C



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		110323
B	尺寸修正3.0	200304

客戶圖面確認簽回章

TITLE

防水M5(F)90度插板式

P/N: SEE TABLE A

DWG. NO: QC5220

DR. Emily



UNIT: mm

CH. Chou

SCALE 1:1

AP. Chou

UNLESS OTHERWISE SPECIFIED TOLERANCES:

REV. A SHEET 1/1

X ± 0.20 XXX ± 0.05
XX ± 0.10 ANGLE ± 1°