


TABLE A

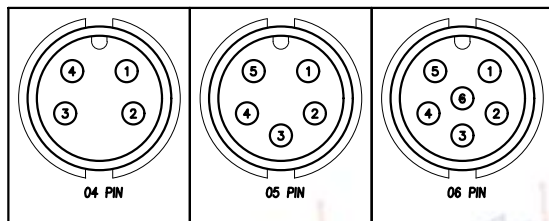

Pin Assignments(Front View)

TABLE A

P/N	CABLE ODφ
HGF2-CS04P-220-11	φ6.5mm~φ7.6mm
HGF2-CS04P-282-11	φ8.6mm~φ9.6mm
HGF2-CS05P-149-11	φ6.5mm~φ7.6mm
HGF2-CS05P-224-11	φ8.6mm~φ9.6mm
HGF2-CS06P-88-11	φ6.5mm~φ7.6mm
HGF2-CS06P-89-11	φ8.6mm~φ9.6mm



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		180802

客戶圖面確認簽回章

TITLE

C SIZE(F)半牙組裝式


P/N: SEE TABLE A

DWG. NO: QC8618

DR. Dan  UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny
UNLESS OTHERWISE SPECIFIED TOLERANCES:
REV. A SHEET 1/1
X ± 0.20 XXX ± 0.05
XX ± 0.10 ANGLE ± 1°

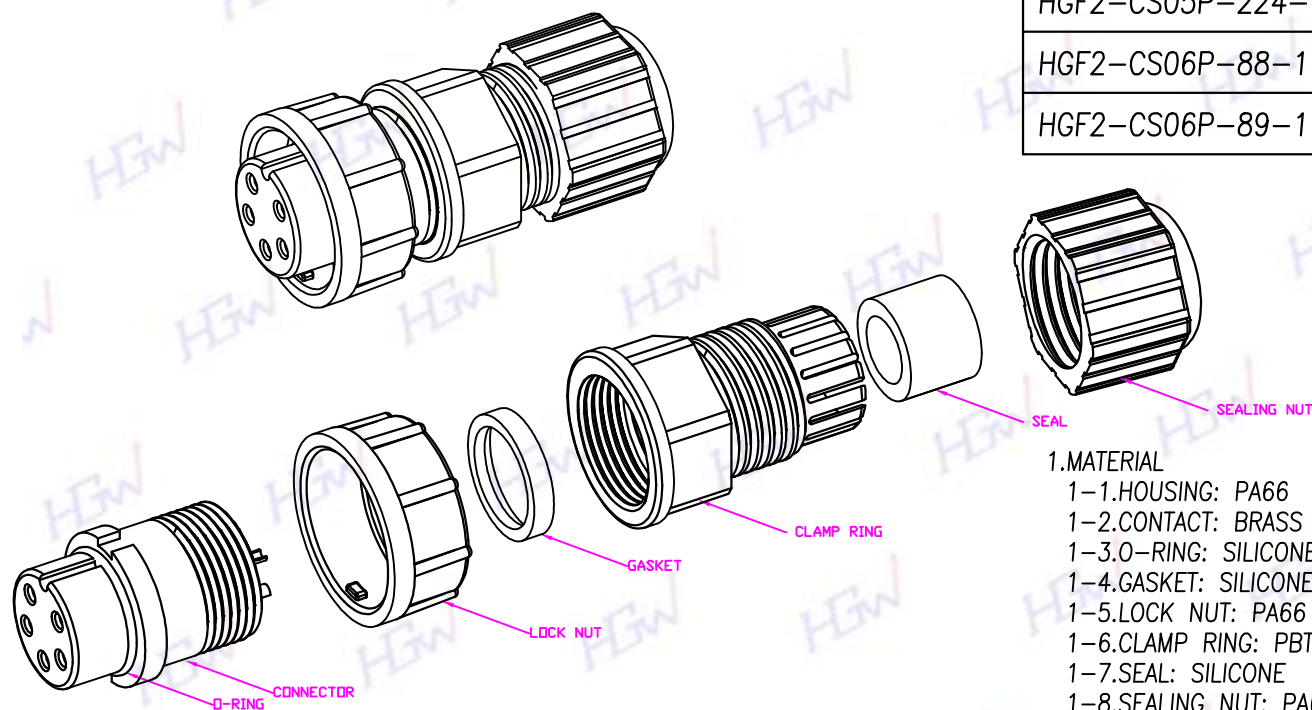

1.MATERIAL

- 1-1.HOUSING: PA66
- 1-2.CONTACT: BRASS
- 1-3.O-RING: SILICONE
- 1-4.GASKET: SILICONE
- 1-5.LOCK NUT: PA66
- 1-6.CLAMP RING: PBT+PC
- 1-7.SEAL: SILICONE
- 1-8.SEALING NUT: PA66

2.FINISH

- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 10A
- 3-2.RATED VOLTAGE: 250V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C

