



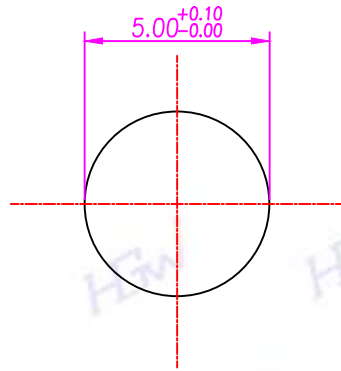

RECOMMEND PANEL CUT-OUT

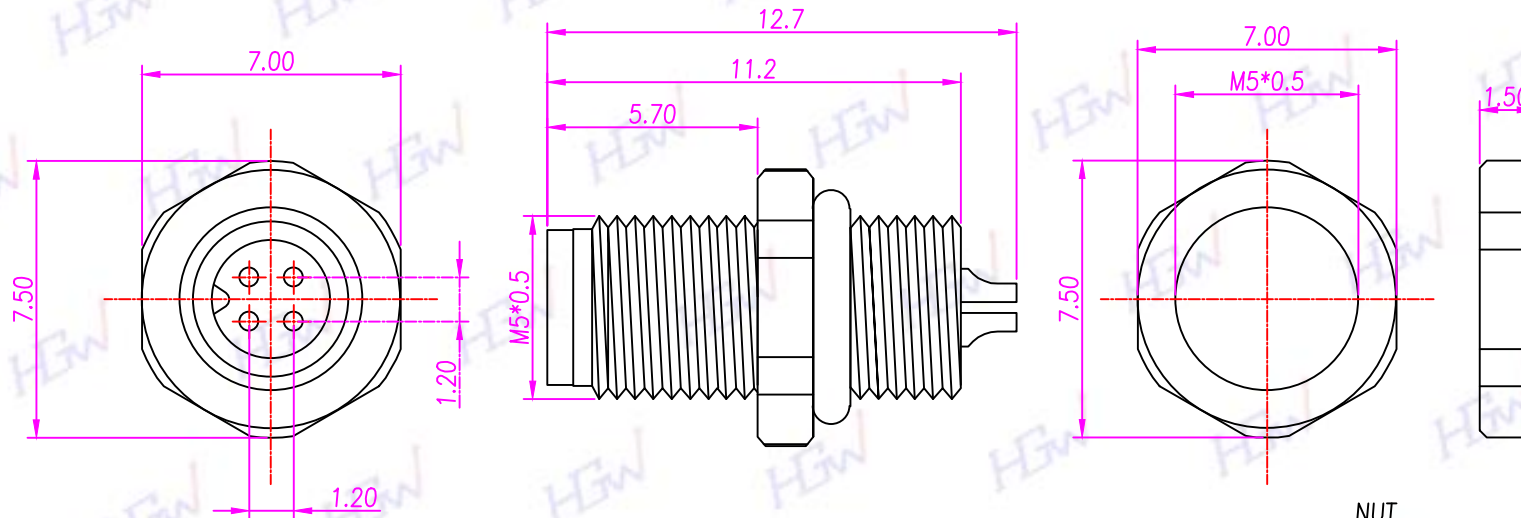

1.MATERIAL

- 1-1.HOUSING: PBT UL94V-0 ; COLOR: BLACK
- 1-2.CONTACT: BRASS
- 1-3.NUT: BRASS
- 1-4.SHELL: BRASS
- 1-5.O-RING: NBR ; COLOR: BLACK

2.FINISH

- 2-1.CONTACT: GOLD FLASH MICRO INCHES MIN
- 2-2.NUT: NICKEL PLATED
- 2-3.SHELL: NICKEL PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 1A
  - 3-2.RATED VOLTAGE: 60V
  - 3-3.WATERPROOF: IP67
- 4.OPERATION TEMPERATURE: -20°C~85°C

TABLE A

|                   |                  |                  |
|-------------------|------------------|------------------|
|                   |                  |                  |
| HGM2-M504P-151-11 | HGM2-M503P-83-11 | HGM2-M502P-48-11 |



禾剛企業有限公司  
HOU GUN ENTERPRISE CO., LTD.

| REV | DESCRIPTION | DATE   |
|-----|-------------|--------|
| A   |             | 170824 |

客戶簽名確認章

TITLE  
M5(M) 後鎖板端焊線式

P/N: SEE TABLE A

DWG. NO: QC8134

DR. Dan UNIT: mm

CH. Jason SCALE 1:1

AP. Lanny  
UNLESS OTHERWISE SPECIFIED TOLERANCES:  
X  $\pm 0.1$  XXX  $\pm 0.03$   
XX  $\pm 0.05$  ANGLE  $\pm 1^\circ$

REV. A SHEET 1/1