


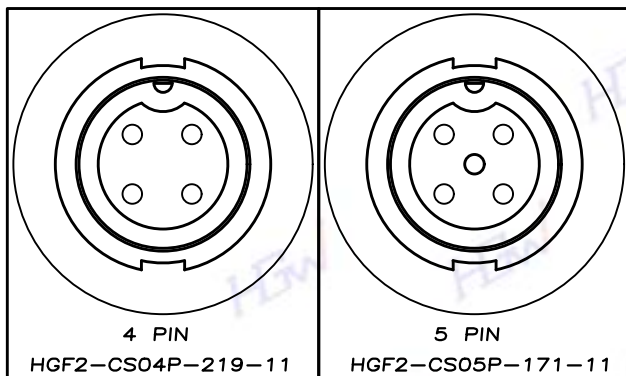
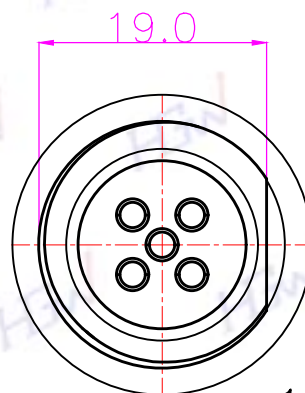


TABLE A

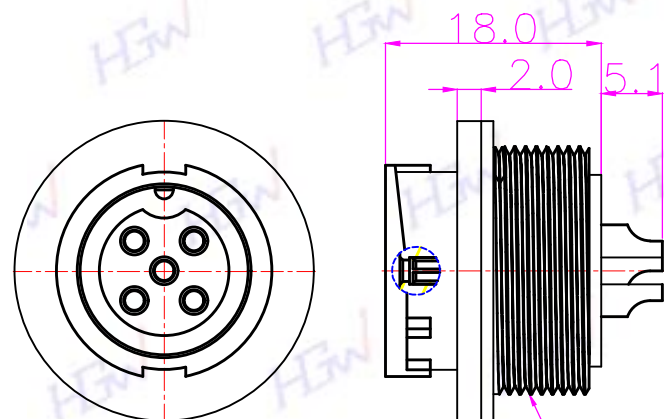

RECOMMEND PANEL CUT-OUT



1.MATERIAL

- 1-1.HOUSING: PA66
1-2.CONTACT: BRASS
1-3.GASKET: SILICONE
1-4.NUT: PA66

2.FINISH


- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 10A
3-2.RATED VOLTAGE: 250V
3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C

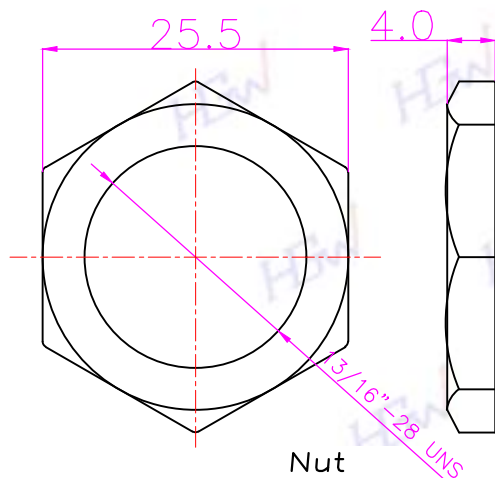

禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		190401

客戶簽名確認章

TITLE

C SIZE 公身母針後鎖焊線式(半牙)

P/N: SEE TABLE A

DWG. NO: QC9048

DR. Dan



UNIT: mm

CH. Jason

SCALE

1:1

AP. Lanny

UNLESS OTHERWISE
SPECIFIED TOLERANCES:

REV.	SHEET	X ± 0.20	XXX ± 0.05
A	1/1	XX ± 0.10	ANGLE ± 1°