

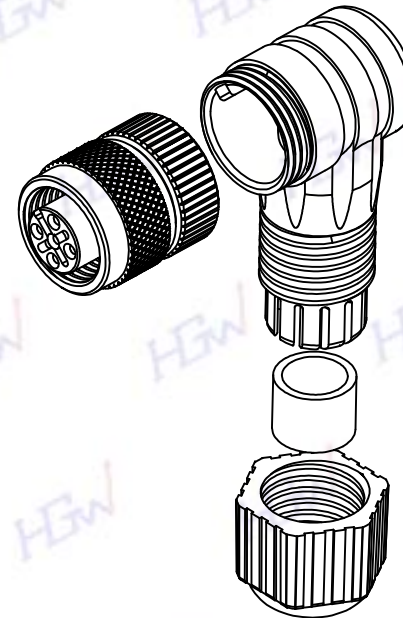
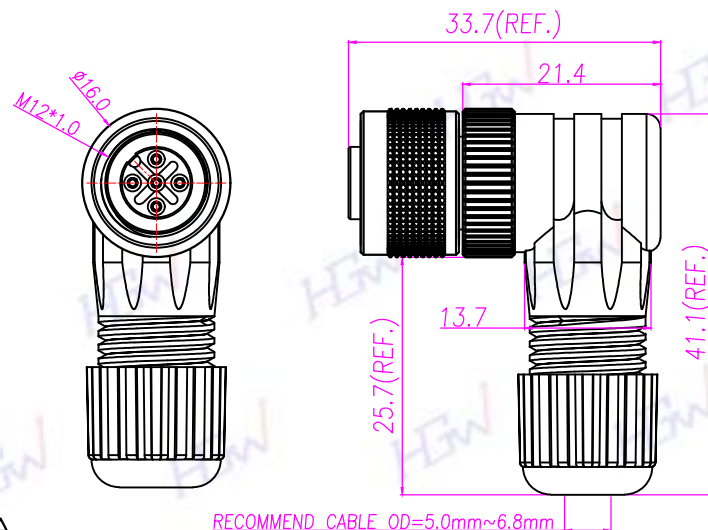


TABLE A

HGF2-M1205P-184-11	HGF2-M1205P-185-11	HGF2-M1205P-186-11	HGF2-M1205P-187-11	HGF2-M1205P-188-11
HGF2-M1204P-239-11	HGF2-M1204P-240-11	HGF2-M1204P-241-11	HGF2-M1204P-242-11	HGF2-M1204P-243-11
HGF2-M1203P-127-11	HGF2-M1203P-128-11	HGF2-M1203P-129-11	HGF2-M1203P-130-11	HGF2-M1203P-131-11
HGF2-M1202P-67-11	HGF2-M1202P-68-11	HGF2-M1202P-69-11	HGF2-M1202P-70-11	HGF2-M1202P-71-11

1.MATERIAL

- 1-1.HOUSING: PA66 UL94V-0 ; COLOR: BLACK
- 1-2.CONTACT: BRASS
- 1-3.SHELL: BRASS
- 1-4.O-RING A: EPDM
- 1-5.NUT: BRASS
- 1-6.O-RING B: SILICONE
- 1-7.CLAMP RING: PA66 UL94V-0 ; COLOR: BLACK
- 1-8.SEAL: SILICONE
- 1-9.SEALING NUT: PA66 UL94V-0 ; COLOR: BLACK

2.FINISH

- 2-1.CONTACT: GOLD 10u" MICRO INCHES MIN
- 2-2.NUT: NICKEL PLATED
- 2-3.SHELL: NICKEL PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 4A
- 3-2.RATED VOLTAGE: 2~4 PIN 250V ; 5 PIN 60V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		190506

客戶簽名確認章

TITLE M12(F)型90度組裝式(防呆轉向XX度)		
P/N:	SEE TABLE A	
DWG. NO:	QC9377	
DR. Dan		UNIT:mm
CH. Jason	SCALE	1:1
AP. Lanny	UNLESS OTHERWISE SPECIFIED TOLERANCES:	
REV. A	SHEET 1/1	X ± 0.20 XXX ± 0.05 XX ± 0.10 ANGLE ± 1°