
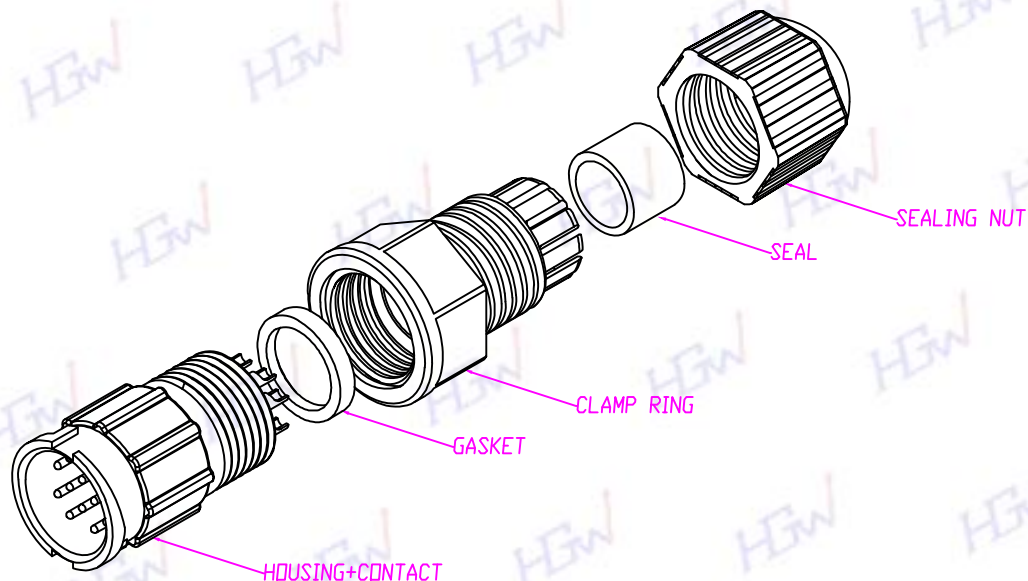


TABLE A

10 PIN	12 PIN
HGM2-BS10P-17-11	HGM2-BS12P-29-11

PIN ASSIGMENTS
FRONT VIEW

44.0(REF)

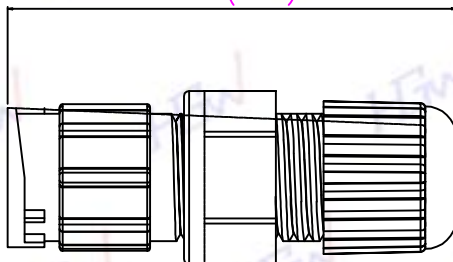

1.MATERIAL

- 1-1.HOUSING: PA66
- 1-2.CONTACT: BRASS
- 1-3.GASKET: SILICONE
- 1-4.CLAMP RING: PA66
- 1-5.SEAL: SILICONE
- CABLE OD ϕ 4.5mm~6.5mm
- 1-6.SEALING NUT: PA66

2.FINISH

- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 2A
- 3-2.RATED VOLTAGE: 250V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: $-40^{\circ}\text{C}\sim 105^{\circ}\text{C}$



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		180720

客戶圖面確認簽回章

TITLE

B SIZE(M)快鎖組裝式(塑膠本體)

P/N: SEE TABLE A

DWG. NO: QC9990

DR. Dan UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny	UNLESS OTHERWISE SPECIFIED TOLERANCES:	
REV. A	SHEET 1/1	X ± 0.20 XXX ± 0.05 XX ± 0.10 ANGLE $\pm 1^{\circ}$