



LED 珍珠小嵌燈



KS9-3009 黑 / 白




KS9-3007 黑 / 白




型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS9-3007	鋁製品、光學透鏡	100~240	3	150 / 175 / 175	3000 / 4000 / 6000	≥ 80	24°	OSRAM 或同等品
KS9-3009	鋁製品、光學透鏡	100~240	3	150 / 175 / 175	3000 / 4000 / 6000	≥ 80	24°	OSRAM 或同等品




KS3-0312 黑 / 白




KD-073 霧銀色




KD-074 霧銀色



KD-076 白色



KS9-3431 銀色




超薄型 免用變壓器

型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KD-073	鋁製品、光學透鏡	100~240	2	100 / 110 / 110	3000 / 4000 / 6000	≥ 80	30°	台灣晶片
KD-074	鋁製品、光學透鏡	100~240	2	100 / 110 / 110	3000 / 4000 / 6000	≥ 80	30°	台灣晶片
KD-076	鐵製品、霧面玻璃	100~240	2	100 / 110 / 110	3000 / 4000 / 6000	≥ 80	120°	台灣晶片
KS9-3431	鋁合金、霧面導光板	100~240	3	200 / 250	2700 / 4000	≥ 80	140°	SMD
KS3-0312	鋁製品、光學透鏡	100~240	5	300 / 330 / 330	3000 / 4000 / 6000	≥ 80	30°	台灣晶片


櫥櫃、展示櫃小坎燈




KD-075S 黑 / 白




KD-075 霧銀色



KS5-3005 白色



型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KD-075S	鋁製品、光學透鏡	100~240	5	500 / 550 / 550	3000 / 4000 / 5000	≥ 80	24°	CREE 或同等品
KD-075	鋁製品、光學透鏡	100~240	9	360 / 420 / 420	3000 / 4000 / 6000	≥ 80	30°	台灣晶片
KS5-3005	鋁製品、光學反光罩、霧面玻璃	100~240	10	1000 / 1100 / 1100	3000 / 4000 / 5000	≥ 80	24°	CREE 或同等品

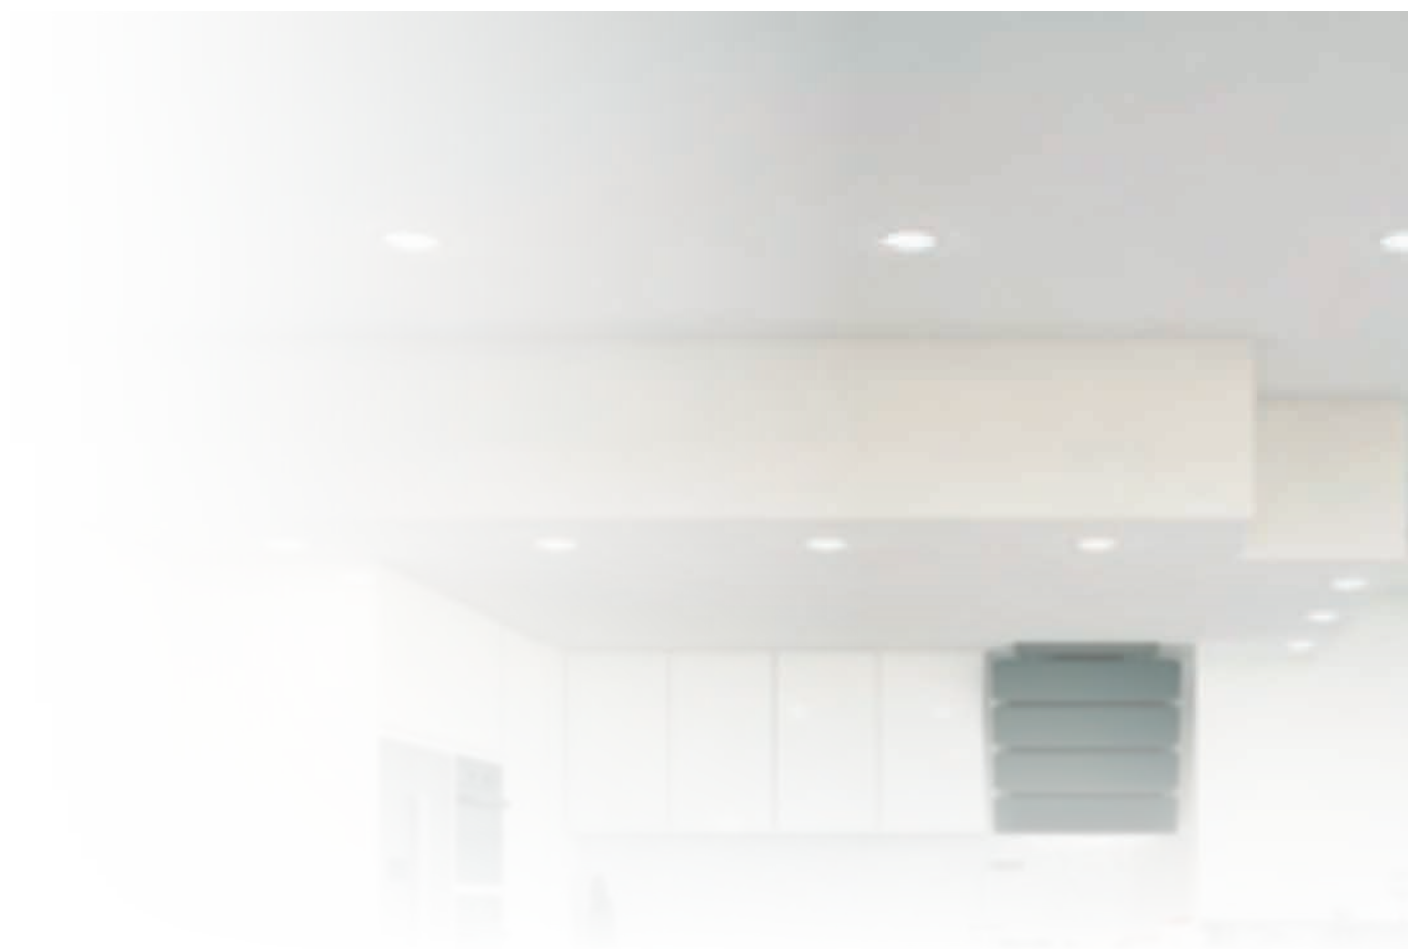


DOWN LIGHT

Lore velit prat, vel illum zzril er irillamet, conse
molore magniamcommy nullutat aute vulput
adipsumsan utatuer stisim nit, commolore m



MKD-081 白



型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	光束角 Beam angle	光源規格 Light source
MKD-081	鋁製品、光學透鏡、冷鍛散熱器	100~240	10	630 / 700 / 700	3000 / 4000 / 6000	24°	SMD



9W



12W






15W


KD-081 黑 / 白

KS5-3102 黑 / 白


KS3-0342 黑 / 白




型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KD-081	鋁製品、光學透鏡、冷鍛散熱器	100~240	9	840 / 910 / 910	3000 / 4000 / 5700	≥ 80	24°	OSRAM 或同等品
KS5-3102	鋁製品、光學透鏡、冷鍛散熱器	100~240	12	1080 / 1170 / 1170	3000 / 4000 / 5700	≥ 80	24°	OSRAM 或同等品
KS3-0342	鋁製品、光學透鏡、冷鍛散熱器	100~240	15	1440 / 1560 / 1560	3000 / 4000 / 5700	≥ 80	24°	OSRAM 或同等品

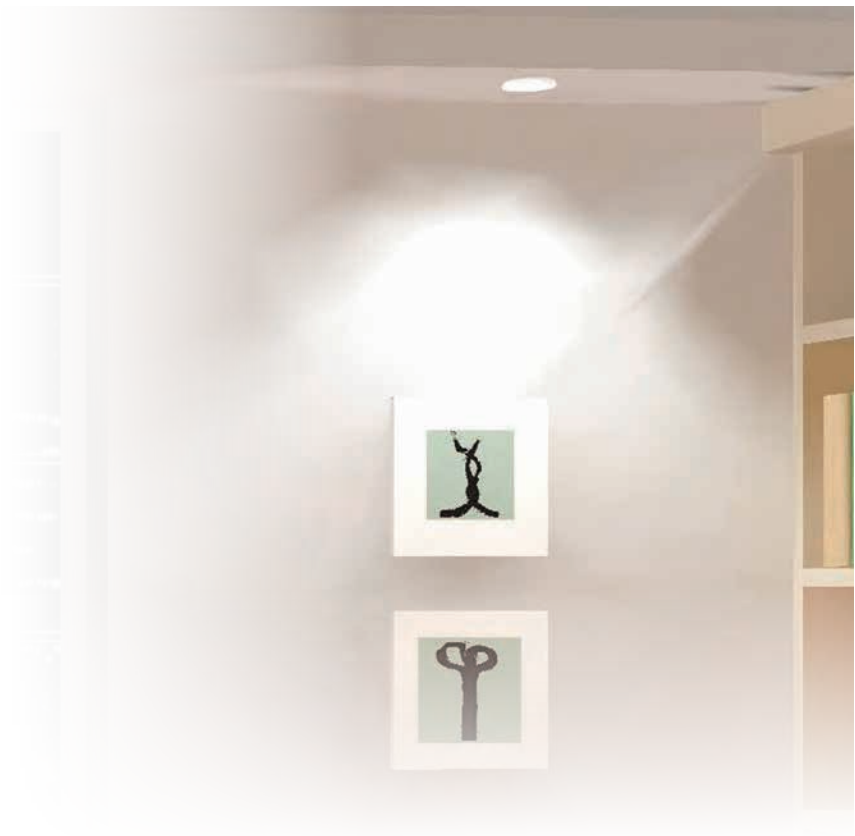


KD-081F 黑 / 白



KS5-3102F 黑 / 白




KS3-0342F 黑 / 白




型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KD-081F	鋁製品、霧面導光板、冷鍛散熱器	100~240	9	840 / 910 / 910	3000 / 4000 / 5700	≥ 80	140°	OSRAM 或同等品
KS5-3102F	鋁製品、霧面導光板、冷鍛散熱器	100~240	12	1080 / 1170 / 1170	3000 / 4000 / 5700	≥ 80	140°	OSRAM 或同等品
KS3-0342F	鋁製品、霧面導光板、冷鍛散熱器	100~240	15	1440 / 1560 / 1560	3000 / 4000 / 5700	≥ 80	140°	OSRAM 或同等品




KS3-0341 黑 / 白



KS5-3103 黑 / 白



KS5-3104 黑 / 白




型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS3-0341	鋁製品、光學透鏡、冷鍛散熱器	100~240	9	840 / 910 / 910	3000 / 4000 / 5700	≥ 80	24°	OSRAM 或同等品
KS5-3103	鋁製品、光學透鏡、冷鍛散熱器	100~240	12	1080 / 1170 / 1170	3000 / 4000 / 5700	≥ 80	24°	OSRAM 或同等品
KS5-3104	鋁製品、光學透鏡、冷鍛散熱器	100~240	15	1440 / 1560 / 1560	3000 / 4000 / 5700	≥ 80	24°	OSRAM 或同等品




9W

KS3-0341H 黑 / 白




12W

KS5-3103H 黑 / 白



15W


KS5-3104H 黑 / 白




型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS3-0341H	鋁製品、霧面導光板、冷鍛散熱器	100~240	9	840 / 910 / 910	3000 / 4000 / 5700	≥ 80	140°	OSRAM 或同等品
KS5-3103H	鋁製品、霧面導光板、冷鍛散熱器	100~240	12	1080 / 1170 / 1170	3000 / 4000 / 5700	≥ 80	140°	OSRAM 或同等品
KS5-3104H	鋁製品、霧面導光板、冷鍛散熱器	100~240	15	1440 / 1560 / 1560	3000 / 4000 / 5700	≥ 80	140°	OSRAM 或同等品




KS5-3201 霧銀色




KD-082 霧銀色



KD-083 霧銀色



KS3-0345 霧銀色



型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS5-3201	鋁製品、光學透鏡、冷鍛散熱器	100~240	9	840 / 910 / 910	3000 / 4000 / 5700	≥ 80	24°	OSRAM 或同等品
KD-082	鋁製品、光學透鏡、冷鍛散熱器	100~240	12	1080 / 1170 / 1170	3000 / 4000 / 5700	≥ 80	24°	OSRAM 或同等品
KD-083	鋁製品、光學透鏡、冷鍛散熱器	100~240	15	1440 / 1560 / 1560	3000 / 4000 / 5700	≥ 80	24°	OSRAM 或同等品
KS3-0345	鋁製品、光學透鏡	100~240	18	1800 / 1980 / 1980	3000 / 4000 / 6000	≥ 80	38°	台灣晶片



拉伸投射燈效果




內縮洗牆效果



內縮嵌燈效果

KS5-3407 白色



型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS5-3407	鋁製品、光學透鏡、鰭片散熱器	100~240	24	2880 / 3120 / 3120	3000 / 4000 / 5700	≥ 80	24°	OSRAM 或同等品

LED 象鼻嵌燈



KS5-3501 白 + 黑



KS5-3502 白 + 黑



KS5-3503 白色





KS5-3504 白色


型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS5-3501	壓鑄鋁、光學反光罩、清光玻璃	100~240	12	1200 / 1320 / 1320	3000 / 4000 / 5000	≥ 80	24°	CREE 或同等品
KS5-3502	壓鑄鋁、光學反光罩、清光玻璃	100~240	20	2000 / 2200 / 2200	3000 / 4000 / 5000	≥ 80	24°	CREE 或同等品
KS5-3503	壓鑄鋁、光學反光罩、清光玻璃	100~240	30	3000 / 3300 / 3300	3000 / 4000 / 5000	≥ 80	24°	CREE 或同等品
KS5-3504	壓鑄鋁、光學反光罩、清光玻璃	100~240	40	4000 / 4400 / 4400	3000 / 4000 / 5000	≥ 80	30°	CREE 或同等品




KS5-3601 黑 / 白

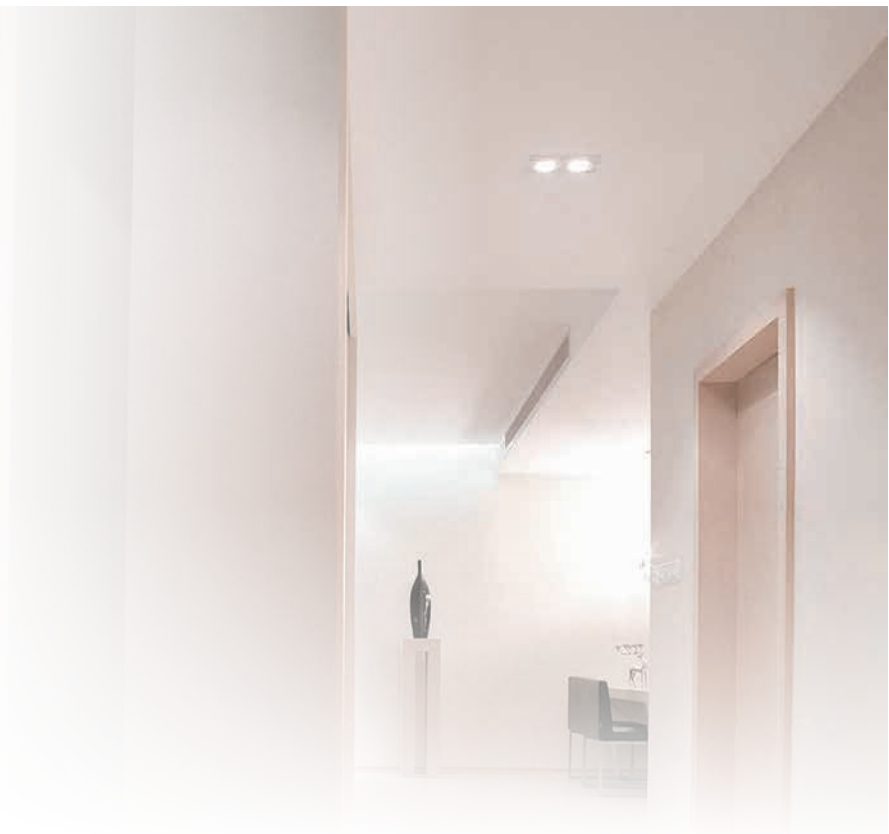

KS5-3603 白



KS5-3607 白




型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS5-3601	鋁製品、光學反光罩	100~240	5	500 / 550 / 550	3000 / 4000 / 5000	≥ 80	24°	CREE 或同等品
KS5-3603	鋁製品、光學反光罩	100~240	7	700 / 770 / 770	3000 / 4000 / 5000	≥ 80	24°	CREE 或同等品
KS5-3607	鋁製品、光學反光罩	100~240	7 X 2	1400 / 1540 / 1540	3000 / 4000 / 5000	≥ 80	24°	CREE 或同等品


LED 太極嵌燈




KS5-3602




KS5-3606




KS5-3604 黑 / 白




KS5-3605



KS5-3608



KS5-3609




型號 Model	材質 Material	電壓 (V) Voltage	功率 (W) Watts	光通量 (lm) Lumen	色溫 (K) Color temperature	演色性 CRI	光束角 Beam angle	光源規格 Light source
KS5-3602	鋁製品、光學反光罩	100~240	5	500 / 550 / 550	3000 / 4000 / 5000	≥ 80	24°	CREE 或同等品
KS5-3606	鋁製品、光學反光罩	100~240	5X2	1000 / 1100 / 1100	3000 / 4000 / 5000	≥ 80	24°	CREE 或同等品
KS5-3604	鋁製品、光學反光罩	100~240	7	700 / 770 / 770	3000 / 4000 / 5000	≥ 80	24°	CREE 或同等品
KS5-3605	鋁製品、光學反光罩	100~240	7X2	1400 / 1540 / 1540	3000 / 4000 / 5000	≥ 80	24°	CREE 或同等品
KS5-3608	鋁製品、光學反光罩	100~240	7X3	2100 / 2310 / 2310	3000 / 4000 / 5000	≥ 80	24°	CREE 或同等品
KS5-3609	鋁製品、光學反光罩	100~240	7X4	2800 / 3080 / 3080	3000 / 4000 / 5000	≥ 80	24°	CREE 或同等品



雙層防水，適合安裝於浴室、廚房
光源、變壓器另計


KS6-3063 白色



壓鑄鋁、防水玻璃墊圈
燈頭：GU5.3
光源：MR16(另計)




K7-0943 白色



鐵製品
燈頭：GU5.3
光源：MR16(另計)
變壓器另計




KS6-3062 白色



鐵製品
燈頭：GU5.3
光源：MR16(另計)
變壓器另計




KS6-3061 白色



鐵製品
燈頭：GU5.3
光源：MR16(另計)
變壓器另計



KD-070 白色




壓鑄鋁
燈頭：GU5.3
光源：MR16(另計)
變壓器另計

MR16 崁燈




K7-1023 黑 / 白



鋁材
光 源 : MR16(另計)

K7-1023S 黑 / 白



鋁材
光 源 : MR16(另計)