

# HF3FA-T

## SUBMINIATURE HIGH POWER RELAY




File No.: E134517



File No.: 40023708



File No.: CQC12002076529



### Features

- High Temperature: 105°C
- 15A 125VAC switching capability
- Flame resistance rating UL94.V-0
- Product in accordance to IEC 60335-1 available
- Subminiature, standard PCB layout
- Plastic sealed and flux proofed types available
- UL insulation system: Class F

### CONTACT DATA

| Contact arrangement                | 1A   | 1C                       |           |
|------------------------------------|--|--------------------------|-----------|
|                                    |  | NO                       | NC        |
| Contact resistance <sup>1)</sup>   | 100mΩ max.(at 1A 6VDC)   |                          |           |
| Contact material                   | AgSnO <sub>2</sub>   |                          |           |
| Contact rating (Res. load)         | 10A 250VAC   | 10A 250VAC <sup>2)</sup> | 6A 250VAC |
| Max. switching voltage             | 250VAC   | 250VAC                   | 250VAC    |
| Max. switching current             | 15A  | 15A                      | 6A        |
| Max. switching power               | 2500VAC  |                          |           |
| Mechanical endurance               | 1 x 10 <sup>7</sup> OPS  |                          |           |
| Electrical endurance <sup>3)</sup> | H type: 5 x 10 <sup>4</sup> OPS<br>(10A 250VAC Resistive load, at 105°C)     |                          |           |
|                                    | H type: 1 x 10 <sup>5</sup> OPS<br>(10A 250VAC Resistive load, at 85°C)      |                          |           |
|                                    | Z type: 5 x 10 <sup>4</sup> OPS<br>(NC: 6A 250VAC, Resistive load, at 105°C) |                          |           |
|                                    | Z type: 5 x 10 <sup>4</sup> OPS<br>(CO: 5A 250VAC, Resistive load, at 105°C) |                          |           |

**Notes:** 1) The data shown above are initial values.  
2) Applicable when NC is not energized with load.  
3) For plastic sealed type, the venting-hole should be excised in electrical endurance test.

### CHARACTERISTICS

|                                |                         |                                 |
|--------------------------------|-------------------------|---------------------------------|
| Insulation resistance          |                         | 100MΩ (at 500VDC)               |
| Dielectric strength            | Between coil & contacts | 2500VAC 1min                    |
|                                | Between open contacts   | 750VAC 1min                     |
| Surge withstand voltage        |                         | 2.5kV(1.2 x 50μs)               |
| Operate time (at rated. volt.) |                         | 10ms max.                       |
| Release time (at rated. volt.) |                         | 5ms max.                        |
| Shock resistance               | Functional              | 98m/s <sup>2</sup>              |
|                                | Destructive             | 980m/s <sup>2</sup>             |
| Vibration resistance           |                         | 10Hz to 55Hz 1.5mm DA           |
| Humidity                       |                         | 5% to 85% RH                    |
| Ambient temperature            |                         | -40°C to 105°C                  |
| Termination                    |                         | PCB                             |
| Unit weight                    |                         | Approx. 7.0g                    |
| Construction                   |                         | Plastic sealed,<br>Flux proofed |

**Notes:** 1) The data shown above are initial values.

### COIL

|            |               |
|------------|---------------|
| Coil power | Approx. 360mW |
|------------|---------------|

### COIL DATA

at 23°C

| Nominal Voltage VDC | Pick-up Voltage VDC max. | Drop-out Voltage VDC min. | Max. Voltage VDC * | Coil Resistance Ω |
|---------------------|--------------------------|---------------------------|--------------------|-------------------|
| 3                   | 2.25                     | 0.3                       | 3.9                | 25 x (1±10%)      |
| 5                   | 3.75                     | 0.5                       | 6.5                | 70 x (1±10%)      |
| 6                   | 4.50                     | 0.6                       | 7.8                | 100 x (1±10%)     |
| 9                   | 6.75                     | 0.9                       | 11.7               | 225 x (1±10%)     |
| 12                  | 9.00                     | 1.2                       | 15.6               | 400 x (1±10%)     |
| 15                  | 11.25                    | 1.5                       | 19.5               | 625 x (1±10%)     |
| 18                  | 13.5                     | 1.8                       | 23.4               | 900 x (1±10%)     |
| 24                  | 18.0                     | 2.4                       | 31.2               | 1600 x (1±10%)    |
| 48                  | 36.0                     | 4.8                       | 62.4               | 6400 x (1±10%)    |

**Notes:** \*Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.

### SAFETY APPROVAL RATINGS

|        |          |   |
|--------|----------|---|
| UL/CUL | 1 Form A | 10A 250VAC at 85°C<br>10A 250VAC at 105°C<br>12A 250VAC at 105°C<br>TV-5 120VAC |
|        | 1 Form C | NO: 10A 250VAC at 85°C<br>NO: 10A 250VAC at 105°C<br>NC: 6A 250VAC at 105°C     |
| VDE    | 1 Form A | 10A 250VAC at 85°C<br>10A 250VAC at 105°C                                       |
|        | 1 Form C | NO: 10A 250VAC at 85°C<br>NO: 10A 250VAC at 105°C<br>NC: 6A 250VAC at 105°C     |

**Notes:** 1) All values unspecified are at room temperature.  
2) Only typical loads are listed above. Other load specifications can be available upon request.  
3) For sealed type, the vent-hole cover should be excised.



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2019 Rev. 1.01

## ORDERING INFORMATION

|                               |                                   |    |                   |               |   |   |       |
|-------------------------------|-----------------------------------|----|-------------------|---------------|---|---|-------|
|                               | HF3FA-T/                          | 12 | -H                | S             | T | F | (XXX) |
| Type                          |                                   |    |                   |               |   |   |       |
| Coil voltage                  | 3, 5, 6, 9, 12, 15,18, 24, 48VDC  |    |                   |               |   |   |       |
| Contact arrangement           | H: 1 Form A                       |    | Z: 1 Form C       |               |   |   |       |
| Construction <sup>1) 2)</sup> | S: Plastic sealed                 |    | Nil: Flux proofed |               |   |   |       |
| Contact material              | T: AgSnO <sub>2</sub>             |    |                   |               |   |   |       |
| Insulation system             | F: Class F                        |    |                   |               |   |   |       |
| Special code <sup>3)</sup>    | XXX: Customer special requirement |    |                   | Nil: Standard |   |   |       |

Notes: 1) We recommend flux proofed types for a clean environment (free from contaminations like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc.).


We suggest to choose plastic sealed types and validate it in real application for an unclean environment (with contaminations like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc.).

2) Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.

3) The customer special requirement express as special code after evaluating by Hongfa. e.g.(335) stands for product in accordance to IEC 60335-1 (GWT).

## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

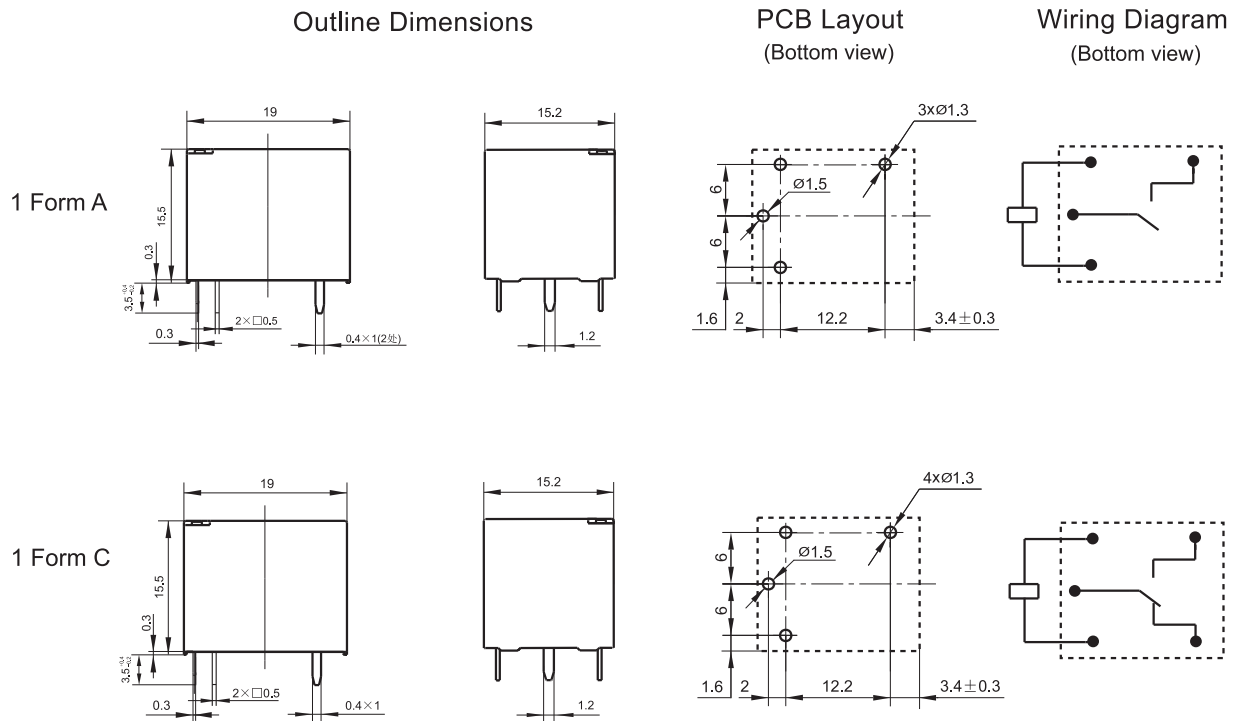

Remark: 1) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1\text{mm}$ , tolerance should be  $\pm 0.2\text{mm}$ ; outline dimension  $> 1\text{mm}$  and  $\leq 5\text{mm}$ , tolerance should be  $\pm 0.3\text{mm}$ ; outline dimension  $> 5\text{mm}$ , tolerance should be  $\pm 0.4\text{mm}$ .

2) The tolerance without indicating for PCB layout is always  $\pm 0.1\text{mm}$ .

CHARACTERISTIC CURVES

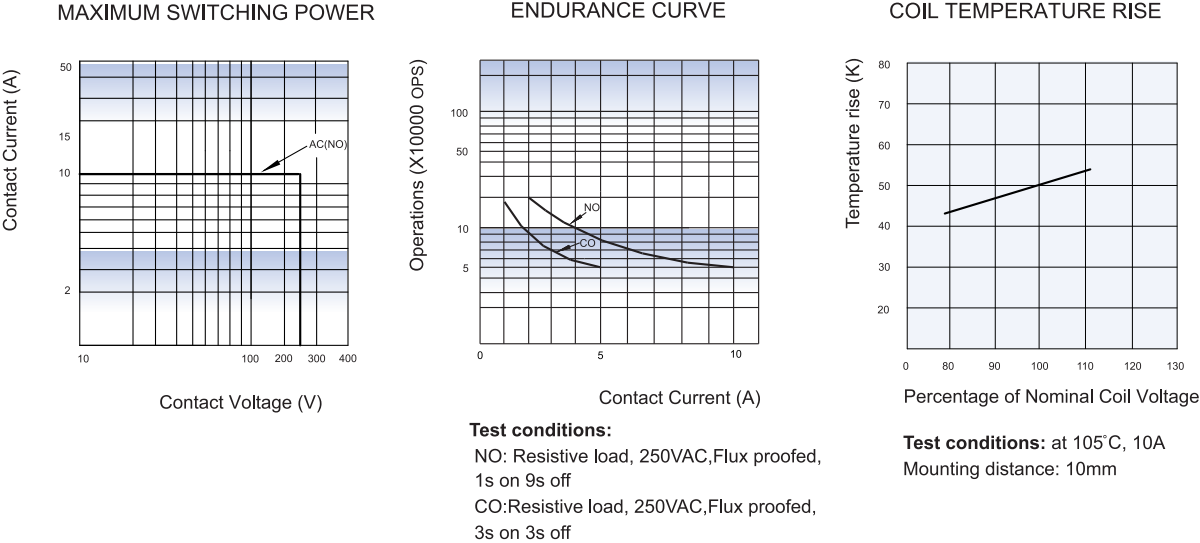

**Disclaimer**  
The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.